



# TEXTILE SECTION

## Textile

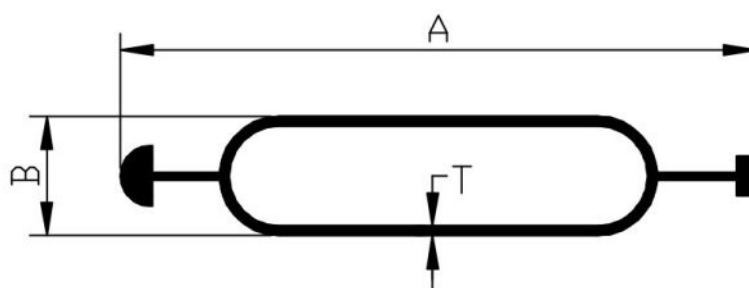


		Sectional Dimension				
Sr. No.	Die No.	A	B	T	Wt Range Kg/12'	
1	TX-2750	48.00	9.00	0.72	0.750	0.850

## Textile

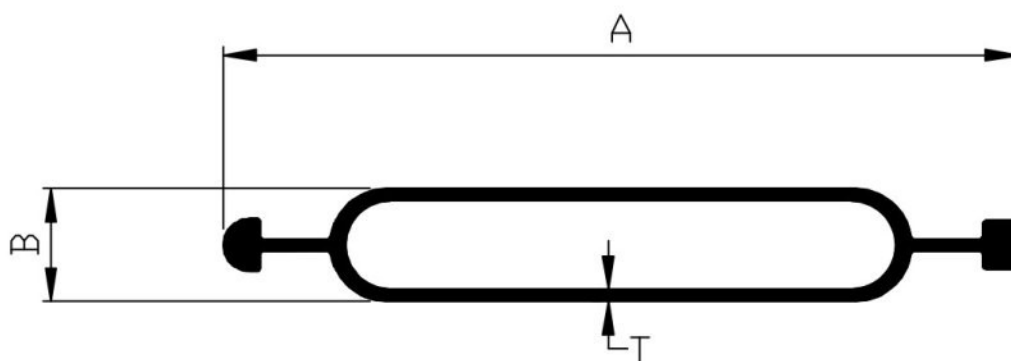


		Sectional Dimension				
Sr. No.	Die No.	A	B	T	Wt Range Kg/12'	
1	TX-2160	60.00	8.50	0.80	1.050	1.200




# TEXTILE SECTION

## SP- 77 Textile

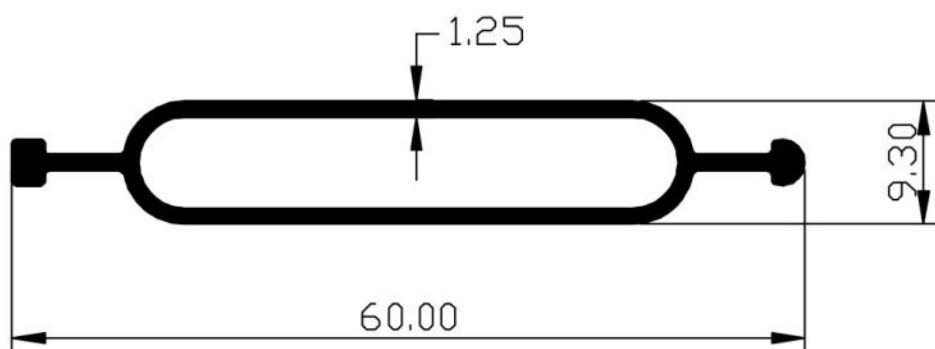


Wt Range Kg/12'  
1.450 to




## TEXTILE SECTION

### SP- 99 Special Section

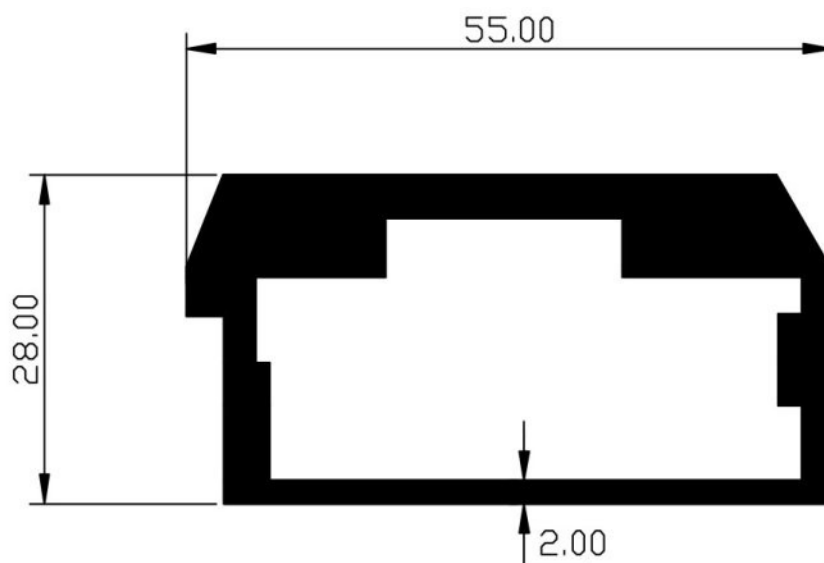

Wt Range Kg/12'  
5.800 to 6.100

### SP- 100 Textile Section

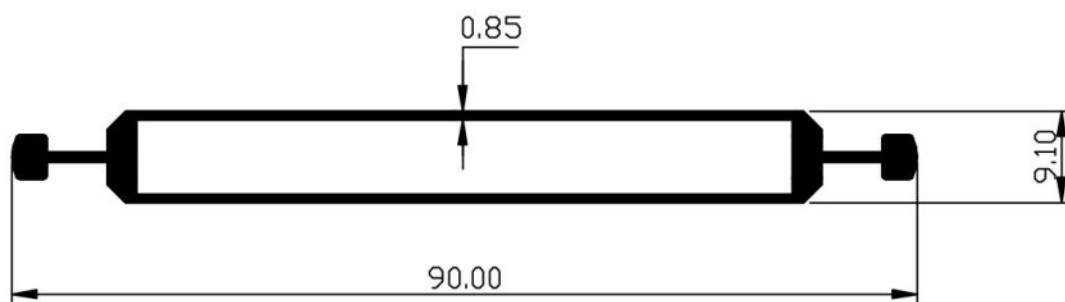


Wt Range Kg/12'  
1.980 to 2.100




## TEXTILE SECTION

### SP- 203 Special Section

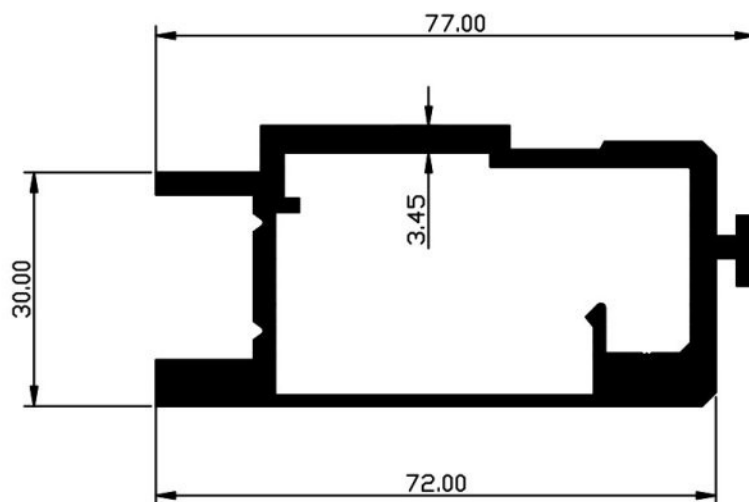

Wt Range Kg/12'  
6.500 to 6.700

### SP- 204 Special Section

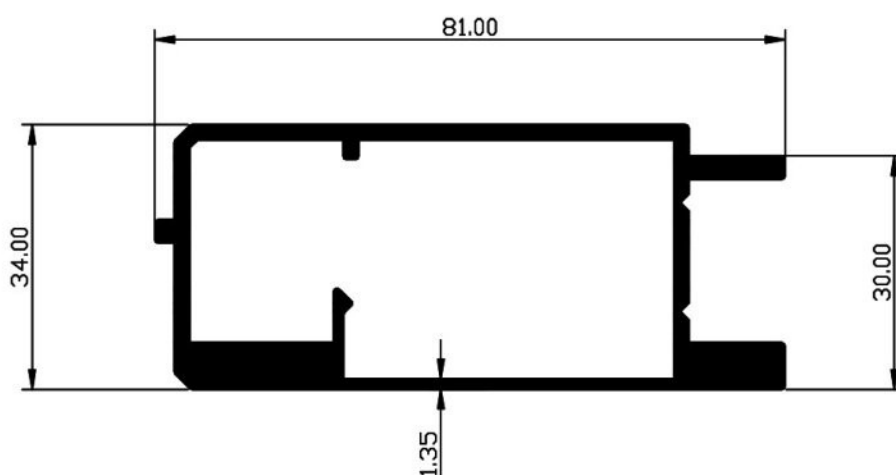


Wt Range Kg/12'  
5.500 to 5.700




## TEXTILE SECTION

### SP- 396 Reed

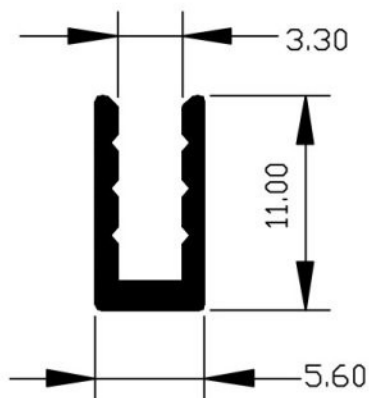


Wt Range Kg/12'  
0.280 to

### SP- 763 Reed

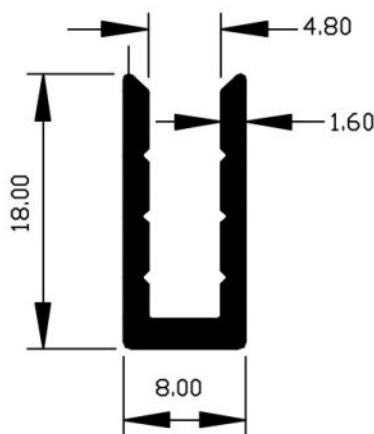


Wt Range Kg/12'  
0.640 to

### SP- 1057 Reed

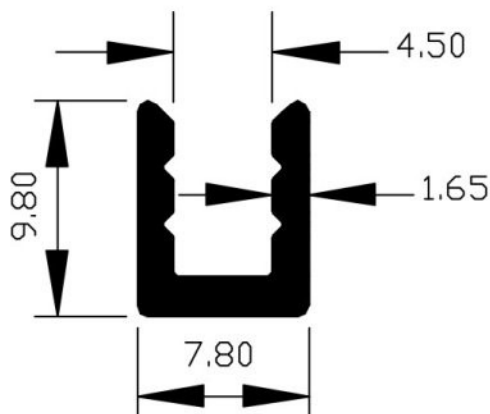


Wt Range Kg/12'  
0.380 to



# TEXTILE SECTION

## SP- 1092 Textile

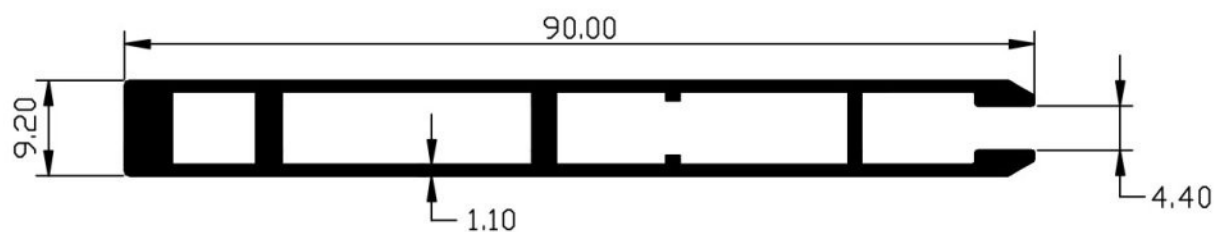


Wt Range Kg/12'  
2.900 to






## TEXTILE SECTION

### SP- 1633 3-Slot Pipe

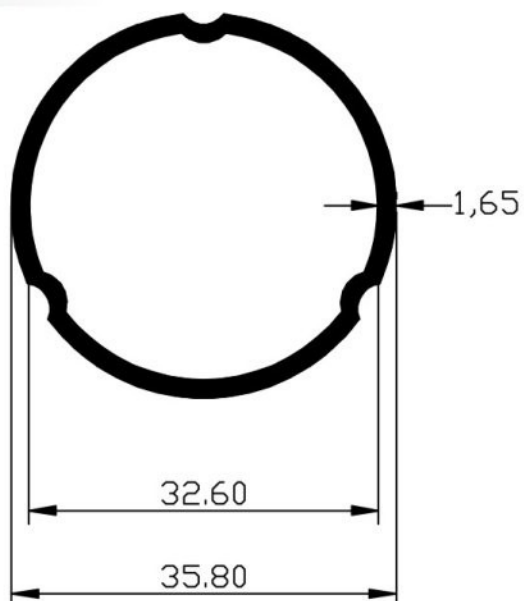

Wt Range Kg/12'  
1.800 to 2.000

### SP- 1633/A 3-Slot Pipe

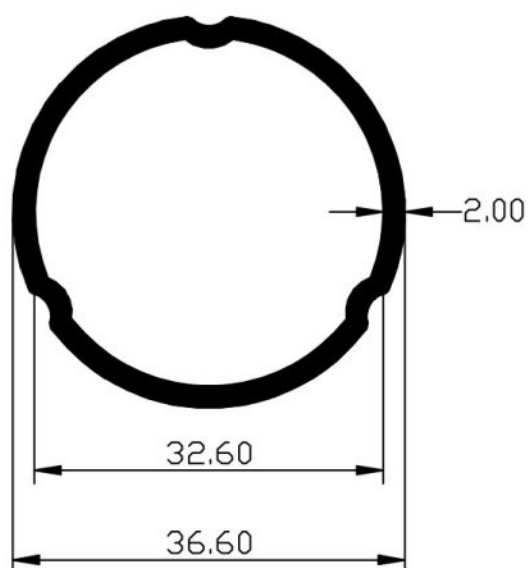

Wt Range Kg/12'  
2.200 to 2.300