





## SPECIAL SECTION

**SP-1 Roller Top**

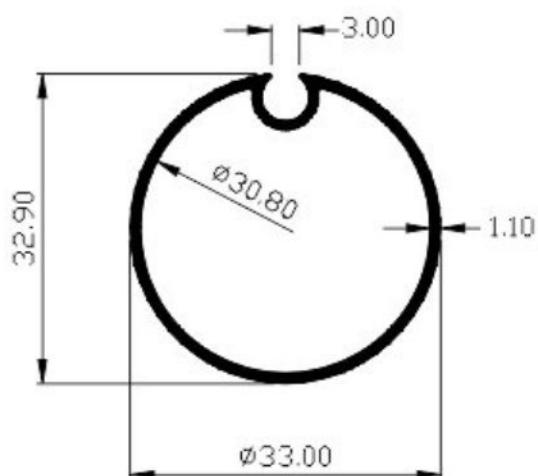


Wt Range Kg/12'  
1.150 to

**SP-2 Two Slot Pipe**

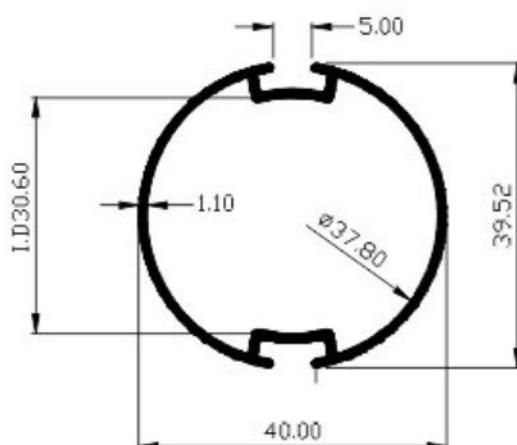


Wt Range Kg/12'  
1.550 to

**SP-3 Roller Bottom**

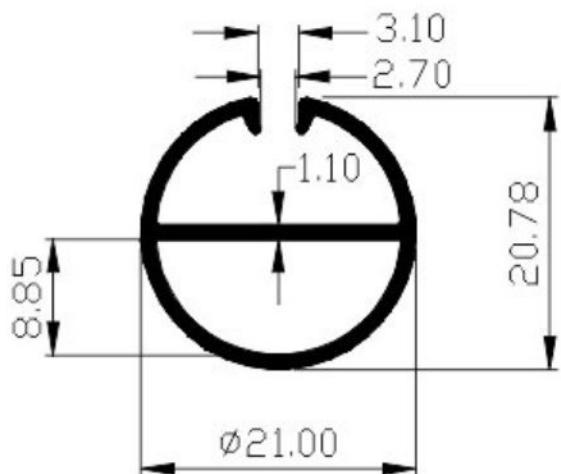

Wt Range Kg/12'  
0.900 to

**SP-4 Big Curtain Channel**

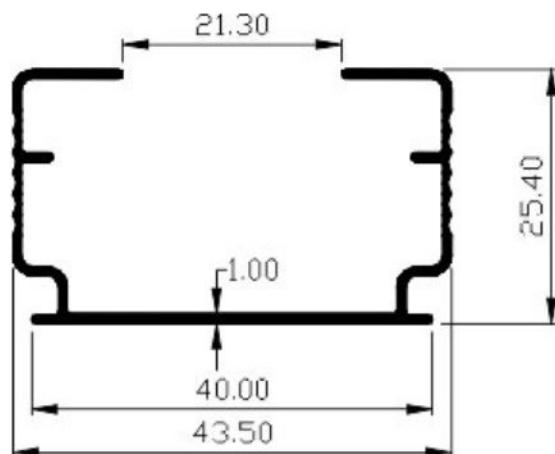


Wt Range Kg/12'  
1.000 to 1.100



# SPECIAL SECTION

## SP- 6 Start Rod

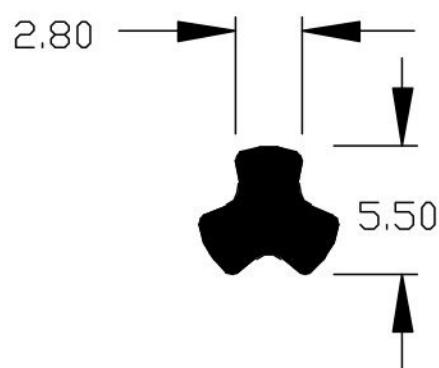


Wt Range Kg/12'  
0.200 to 0.250




## SPECIAL SECTION

SP-7

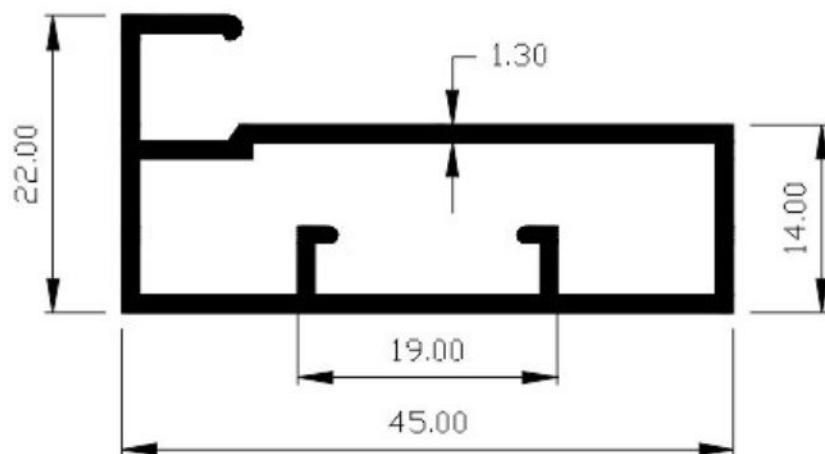


Wt Range Kg/12'  
1.850 to

SP-8 Hexagonal

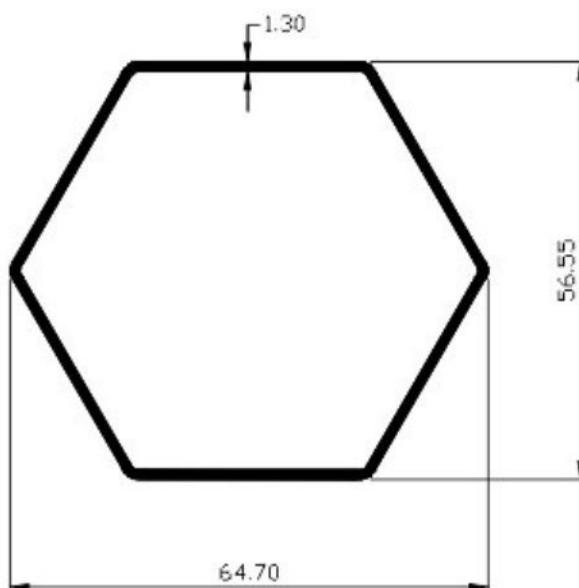


Wt Range Kg/12'  
2.500 to




# SPECIAL SECTION

SP-9 Channel

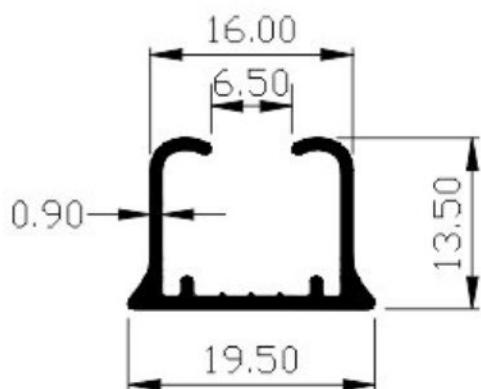


Wt Range Kg/12'  
1.150 to

SP-10

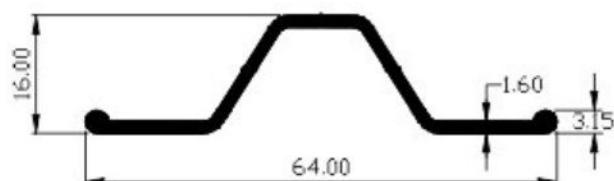


Wt Range Kg/12'  
1.550 to

SP-11 Angle

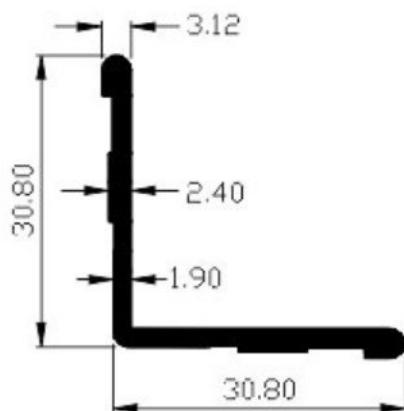

Wt Range Kg/12'  
1.280 to

SP-12 Angle

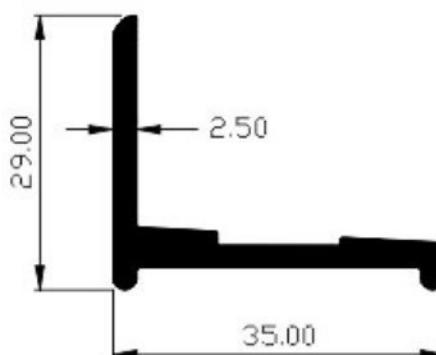


Wt Range Kg/12'  
1.700 to



# SPECIAL SECTION

**SP-14 Half Round**

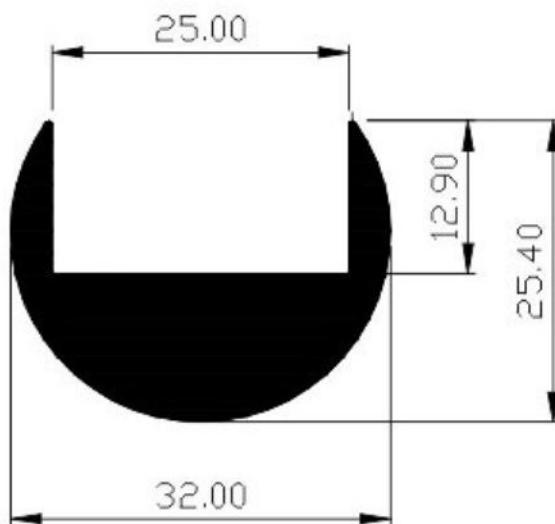

Wt Range Kg/12'  
3.620 to




# SPECIAL SECTION

## SP-15 Channel



Wt Range Kg/12'  
5.500 to

## SP-16 Square

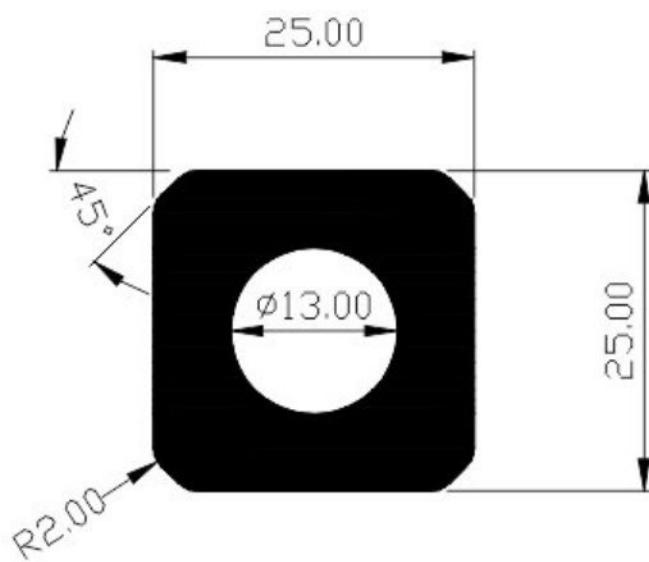


Wt Range Kg/12'  
4.780 to




## SPECIAL SECTION

### SP-17 Leg Channael

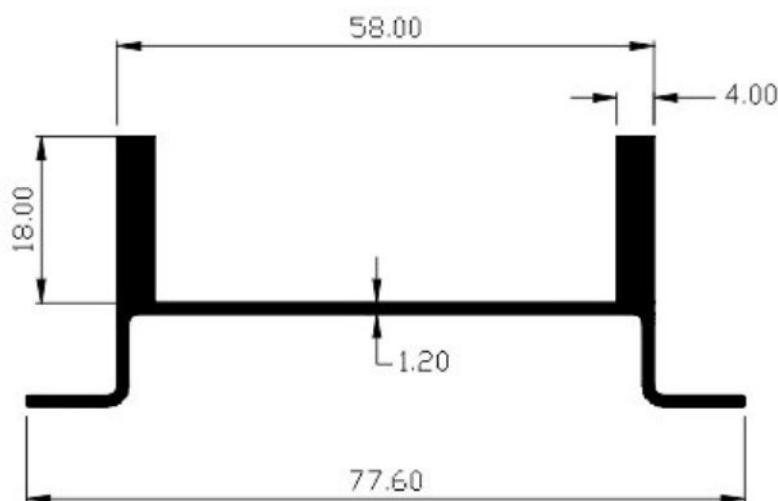


Wt Range Kg/12'  
2.560 to

### SP-18 Fins Section

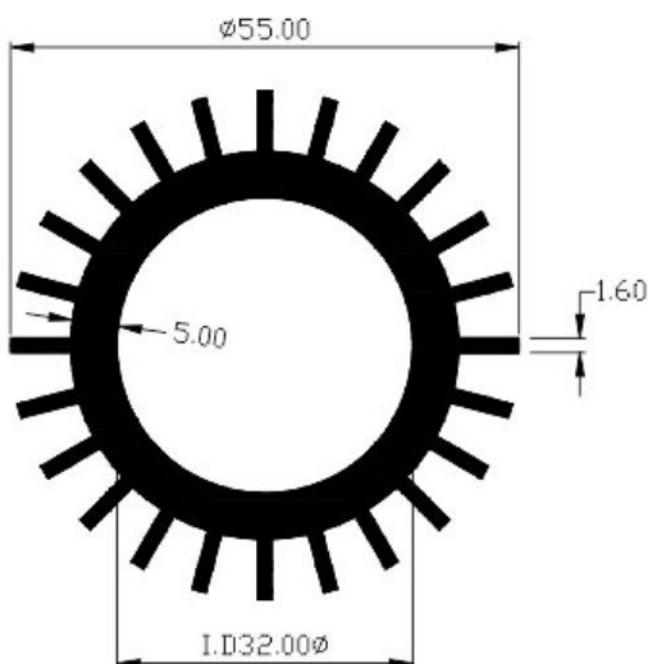


Wt Range Kg/12'  
8.300 to




## SPECIAL SECTION

SP-19

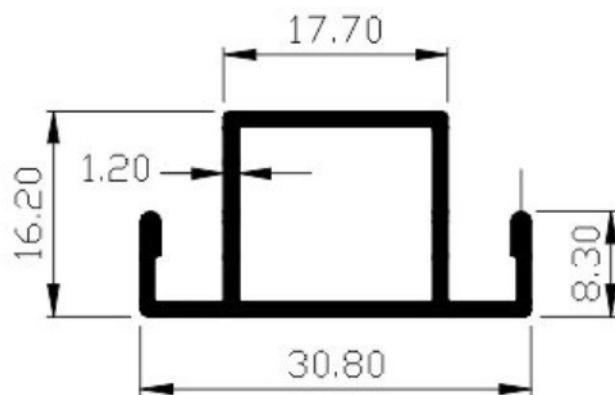

Wt Range Kg/12'  
1.070 to

SP-20

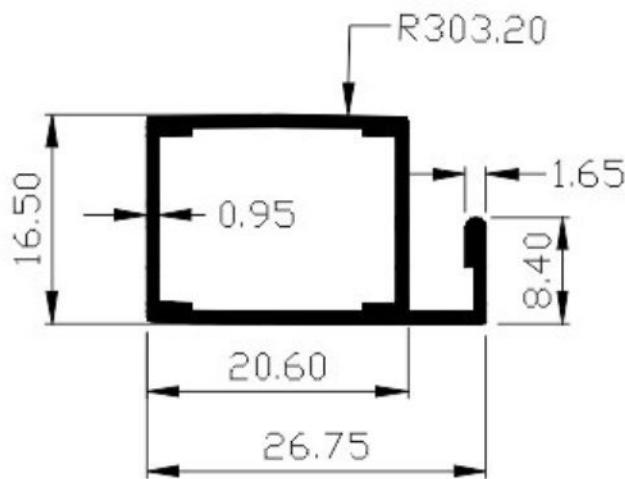


Wt Range Kg/12'  
0.880 to




# SPECIAL SECTION

SP-21/A Slick

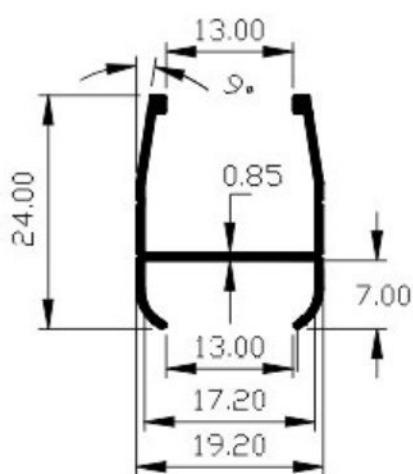


Wt Range Kg/12'  
0.600 to

SP-21/B Narrow

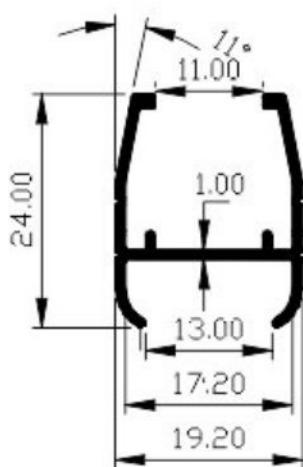

Wt Range Kg/12'  
0.540 to

SP-22 Silver

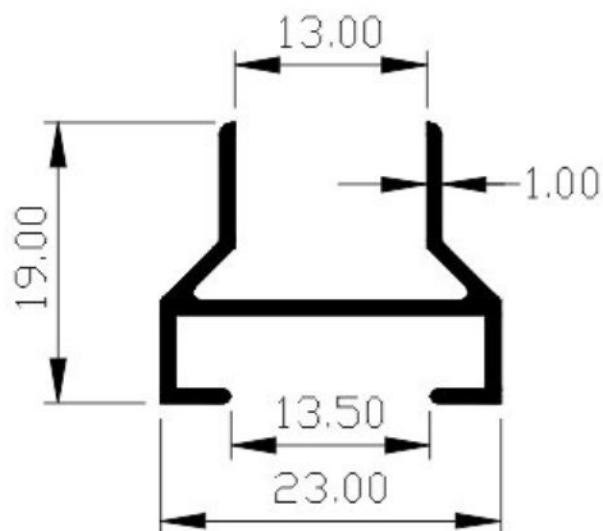


Wt Range Kg/12'  
0.690 to



# SPECIAL SECTION

## SP-23 Display Section

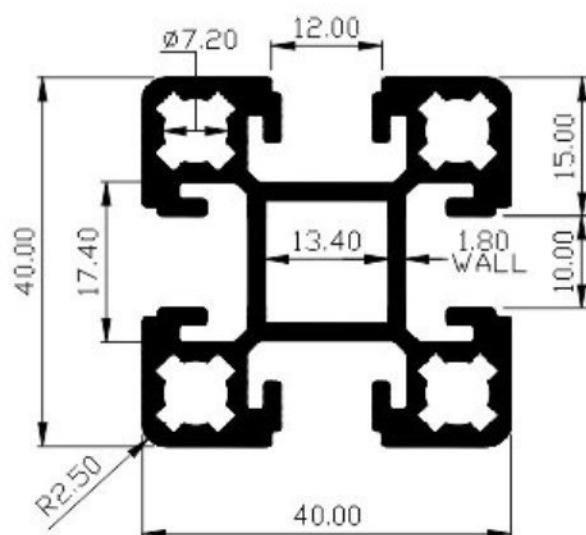


Wt Range Kg/12'  
5.200 to



## SPECIAL SECTION

SP-26 Hinge

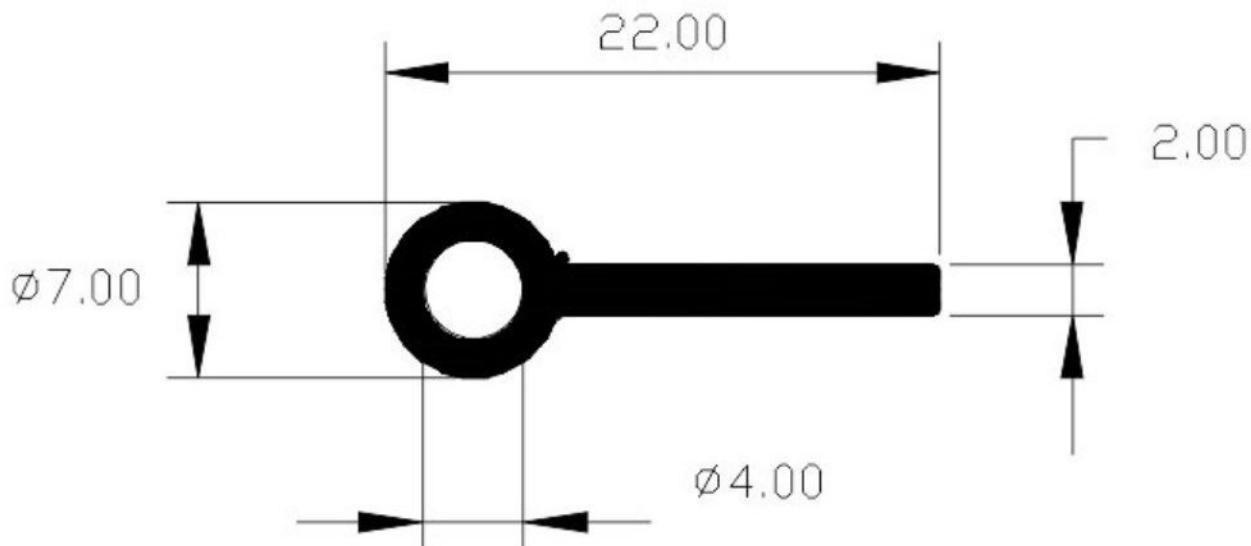


Wt Range Kg/12'  
0.550 to




## SPECIAL SECTION

### SP-27 Squaretube

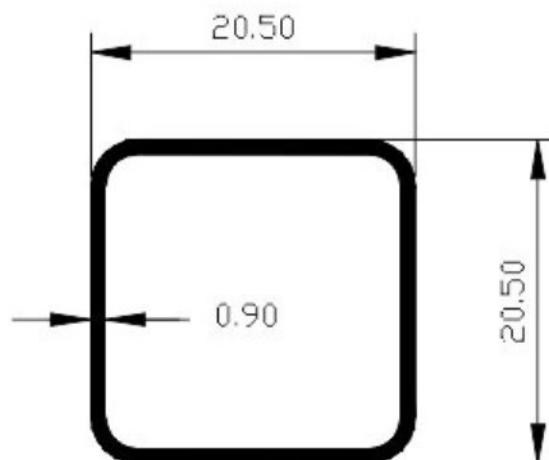

Wt Range Kg/12'  
0.650 to

### SP-28 Channel

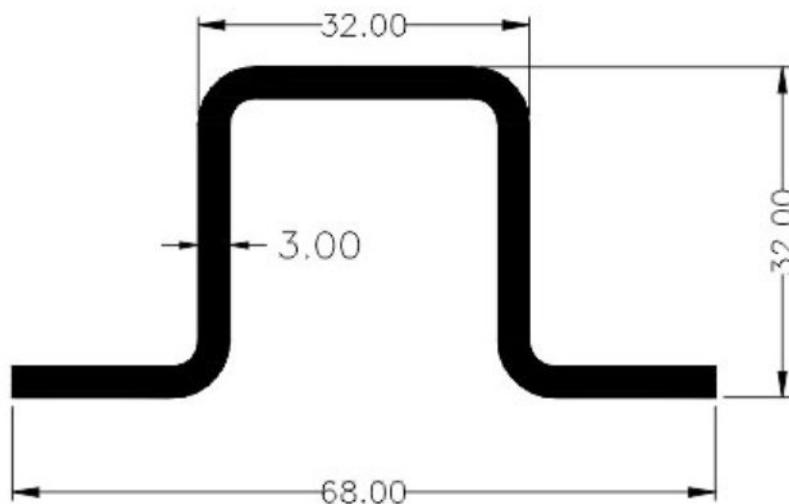


Wt Range Kg/12'  
3.500 to



# SPECIAL SECTION

SP-29

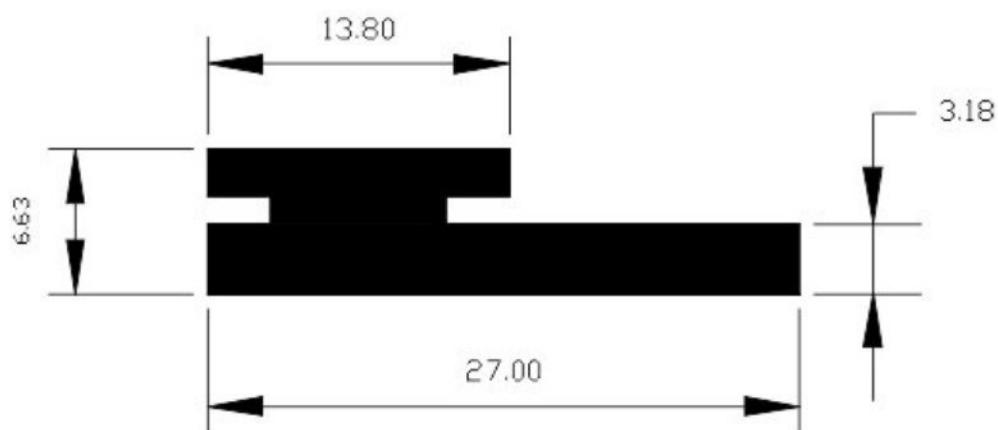


Wt Range Kg/12'  
1.250 to




## SPECIAL SECTION

### SP-32 Door Middle

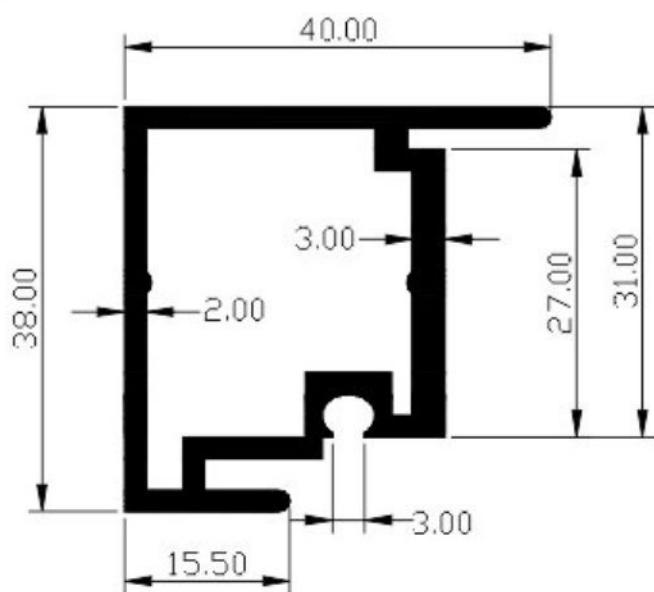


Wt Range Kg/12'  
3.500 to

### SP-33 Half Round Cap

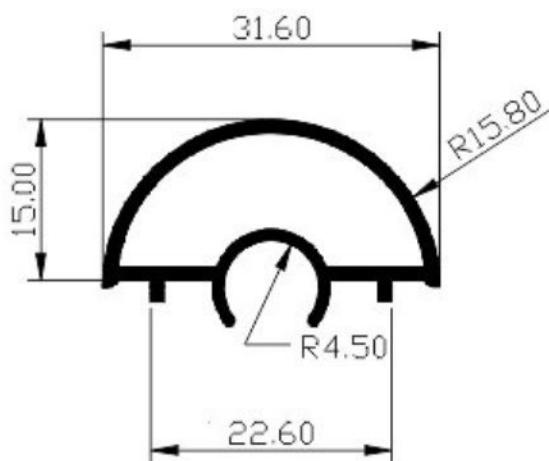


Wt Range Kg/12'  
1.050 to




## SPECIAL SECTION

### SP-34 Handle

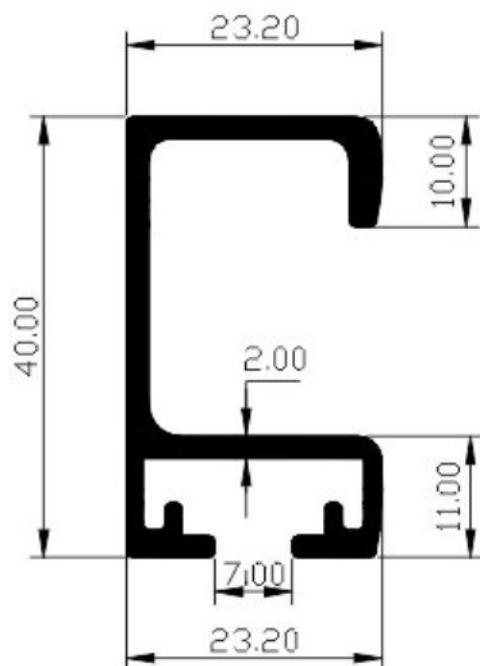

Wt Range Kg/12'  
2.300 to

### SP-35

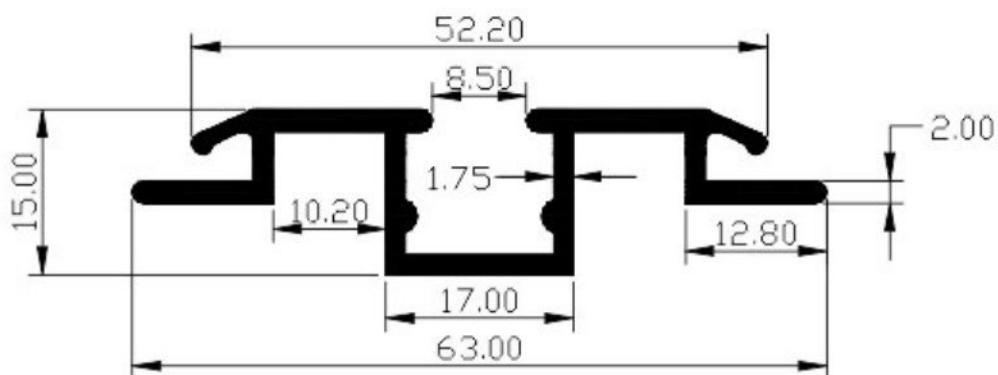


Wt Range Kg/12'  
2.225 to




# SPECIAL SECTION

## SP-36 Bottom Section

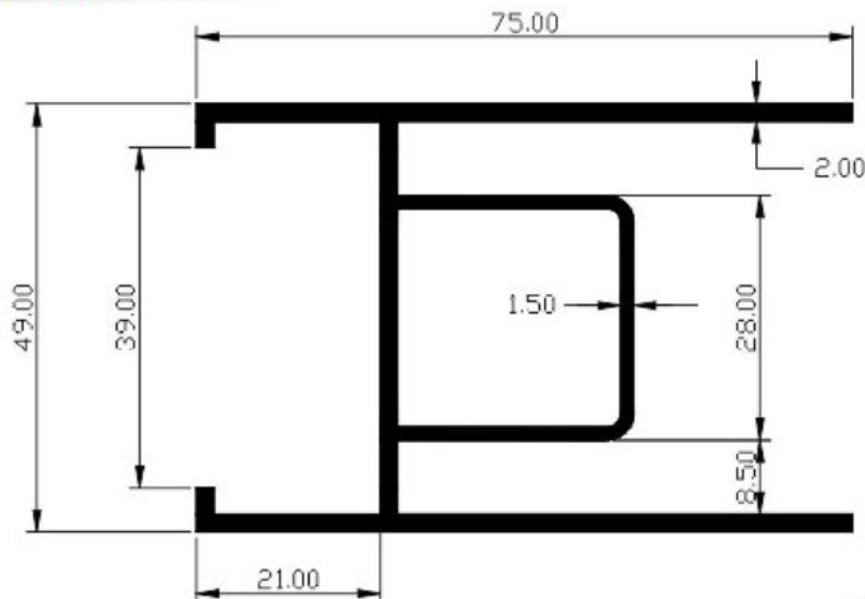

Wt Range Kg/12'  
5.150 to

## SP-37 Door Frame

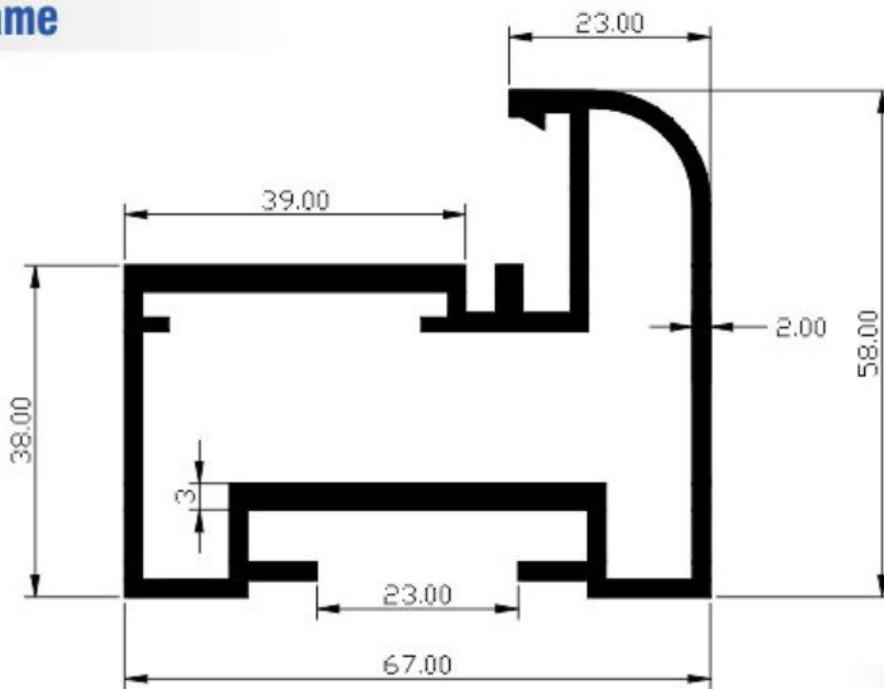


Wt Range Kg/12'  
6.790 to




## SPECIAL SECTION

**SP-38 Double Glass  
Partition V.P. Section**

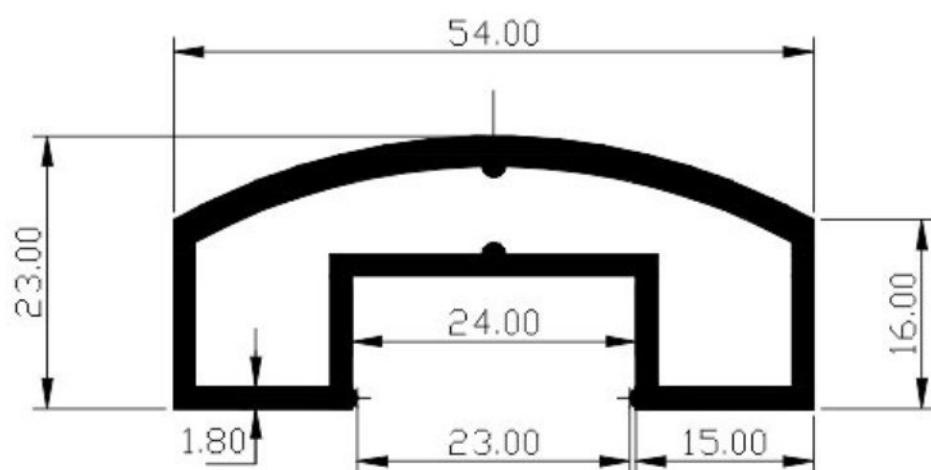

Wt Range Kg/12'  
3.200 to

**SP-39 Wall V.P. Section**

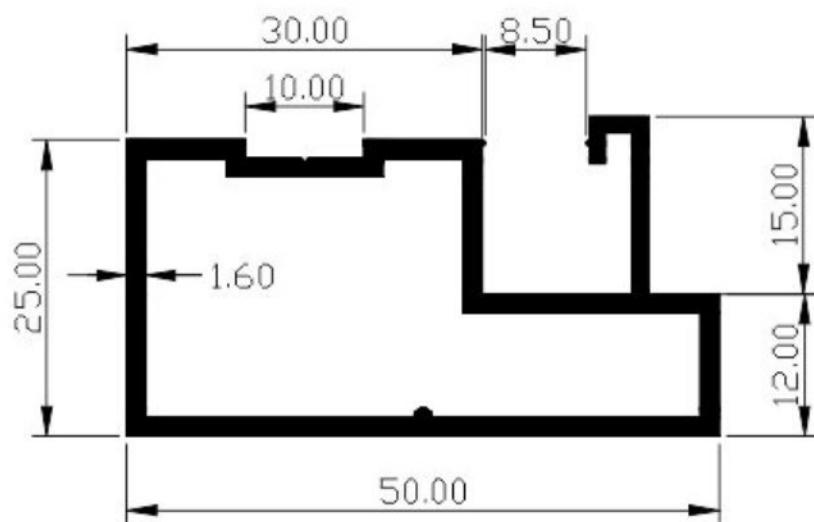


Wt Range Kg/12'  
2.600 to




## SPECIAL SECTION

### SP-40 Clip Patti

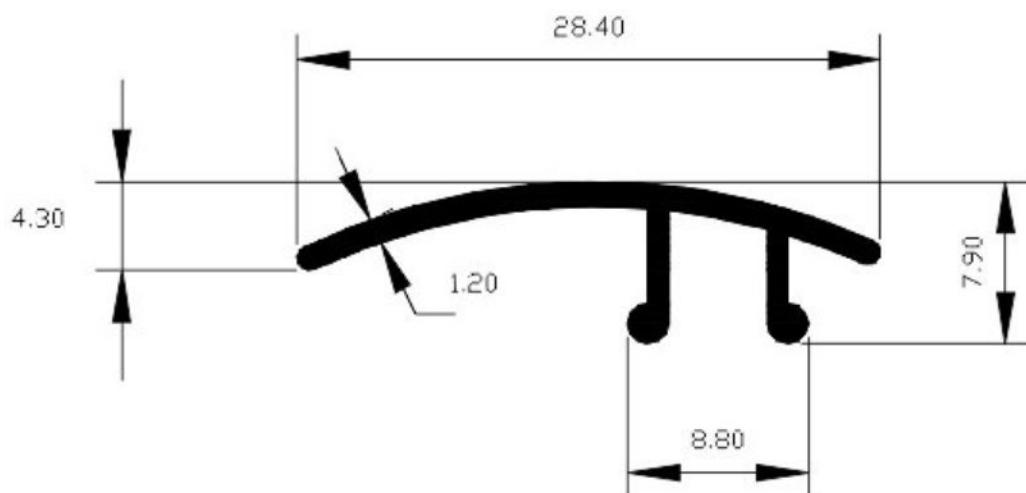

Wt Range Kg/12'  
0.485 to

### SP-41 Door V.P. Section

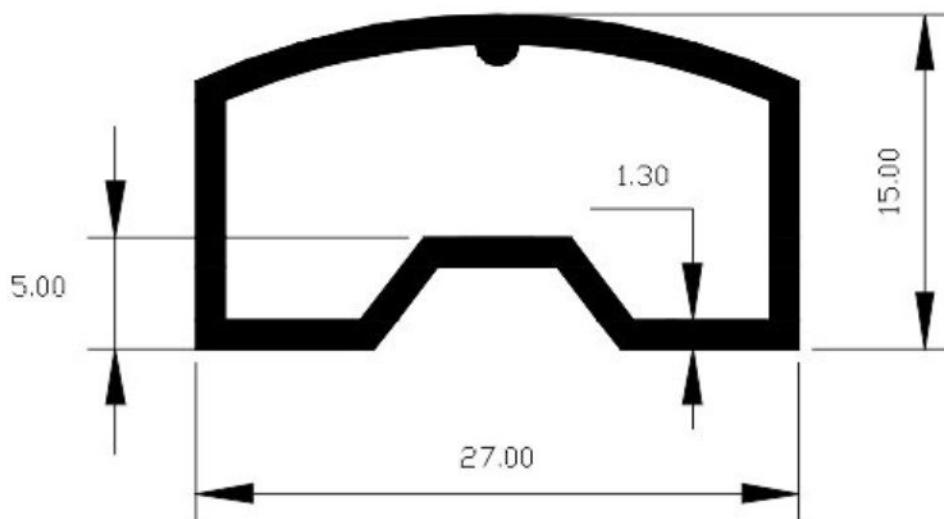


Wt Range Kg/12'  
1.000 to




## SPECIAL SECTION

### SP-42 Single Glass Partition V.P. Section

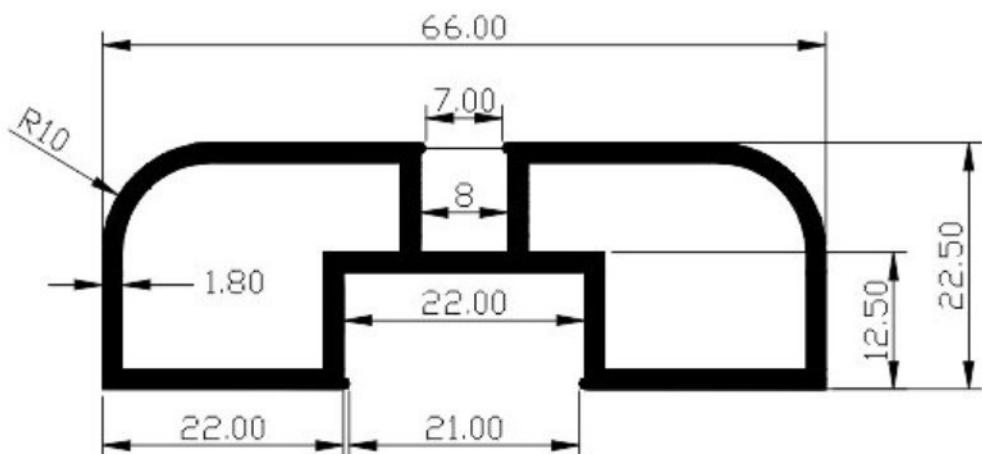


Wt Range Kg/12'  
3.400 to

### SP-43 Leg Section

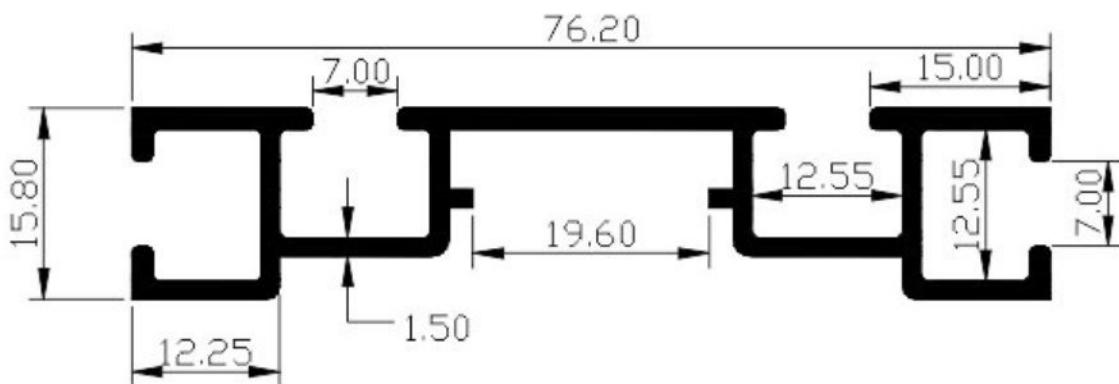


Wt Range Kg/12'  
2.700 to



# SPECIAL SECTION

## SP-44 Key Board Section

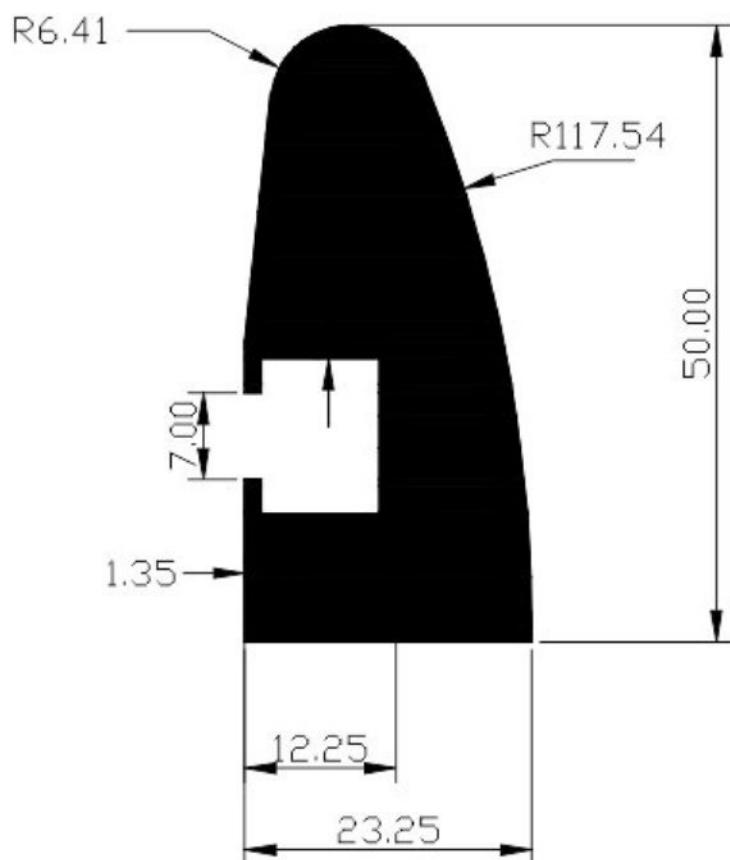


Wt Range Kg/12'  
2.700 to



# SPECIAL SECTION

## SP-45 Mullion Section

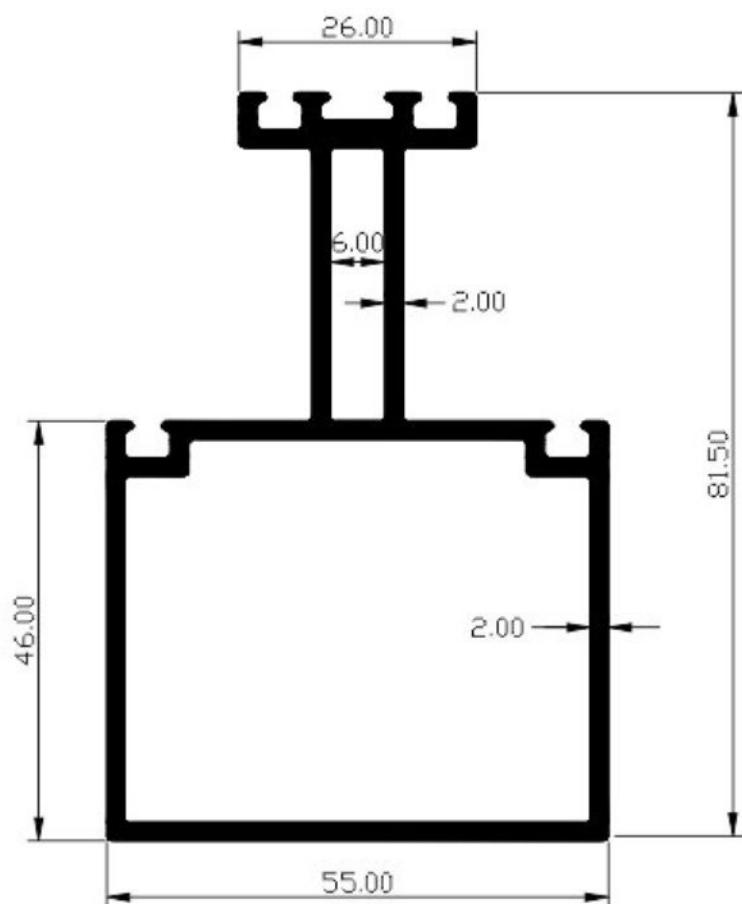


Wt Range Kg/12'  
6.140 to




# SPECIAL SECTION

SP-46

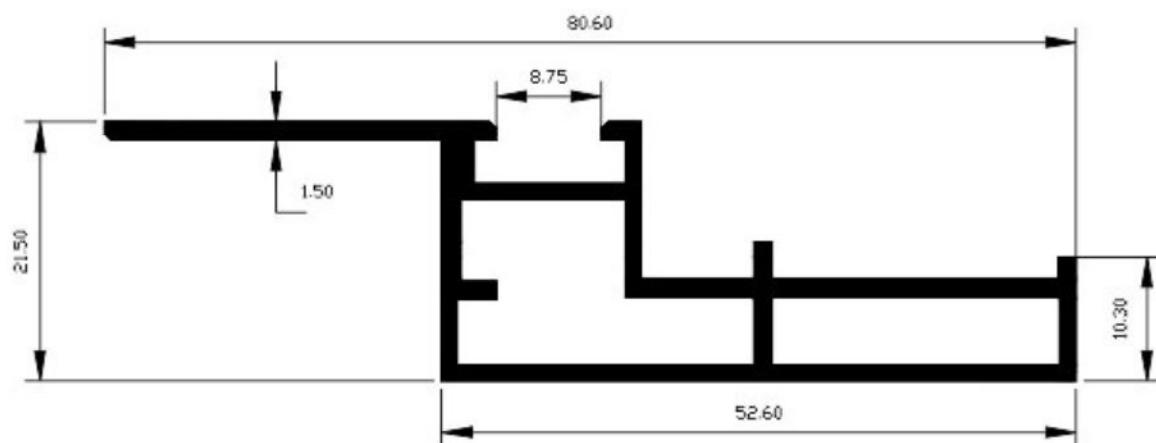

Wt Range Kg/12'  
2.650 to

SP-47 Toggle Clit

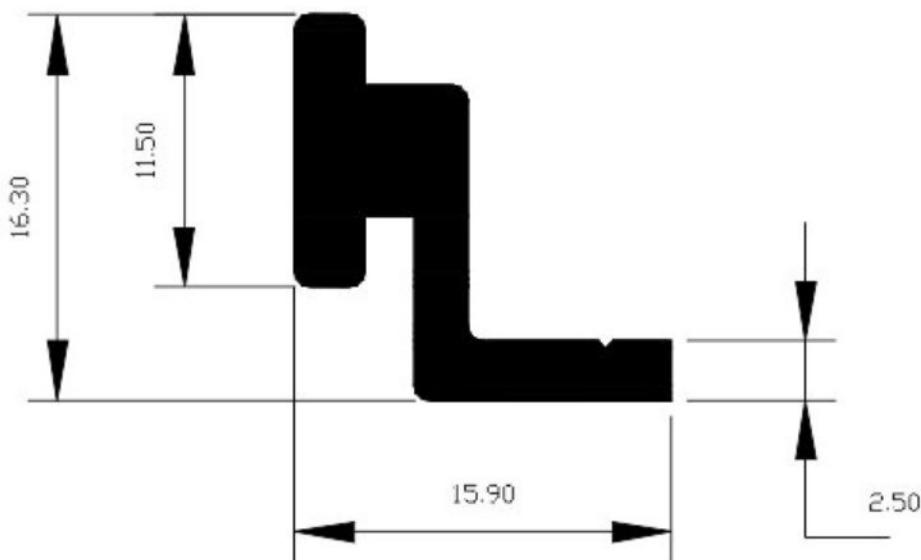


Wt Range Kg/12'  
0.950 to




## SPECIAL SECTION

### SP-48 Riter Bar

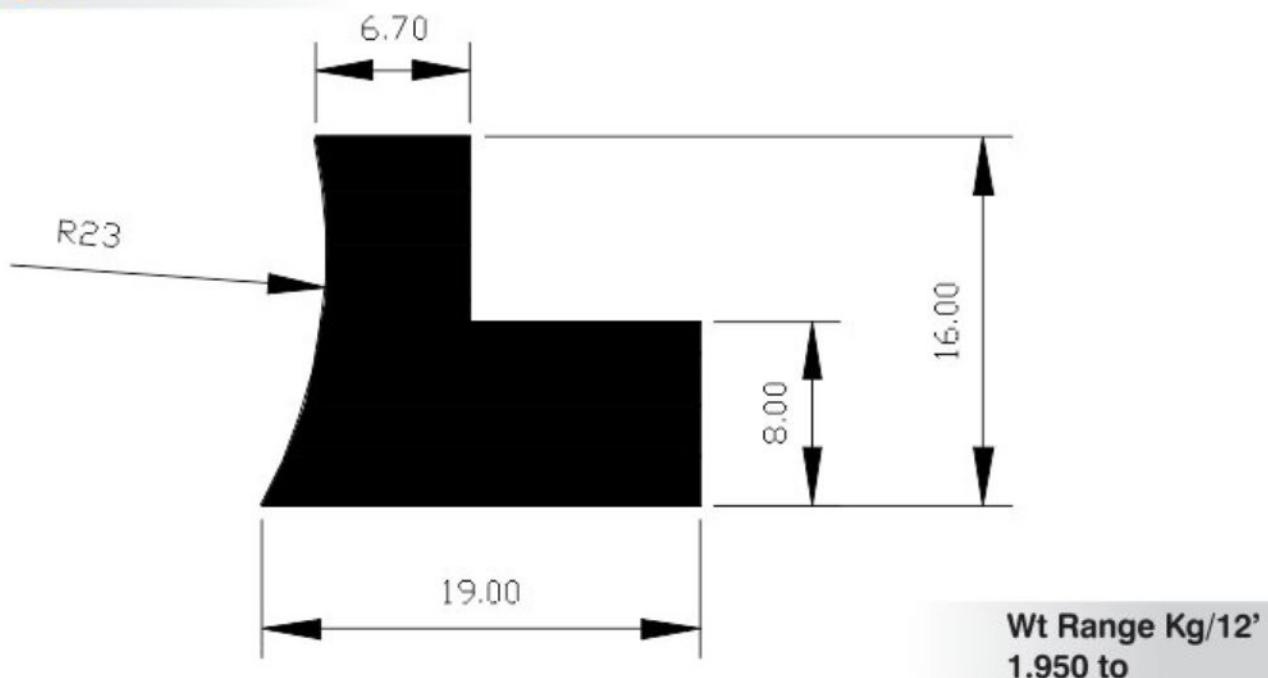


### SP-49 Channel

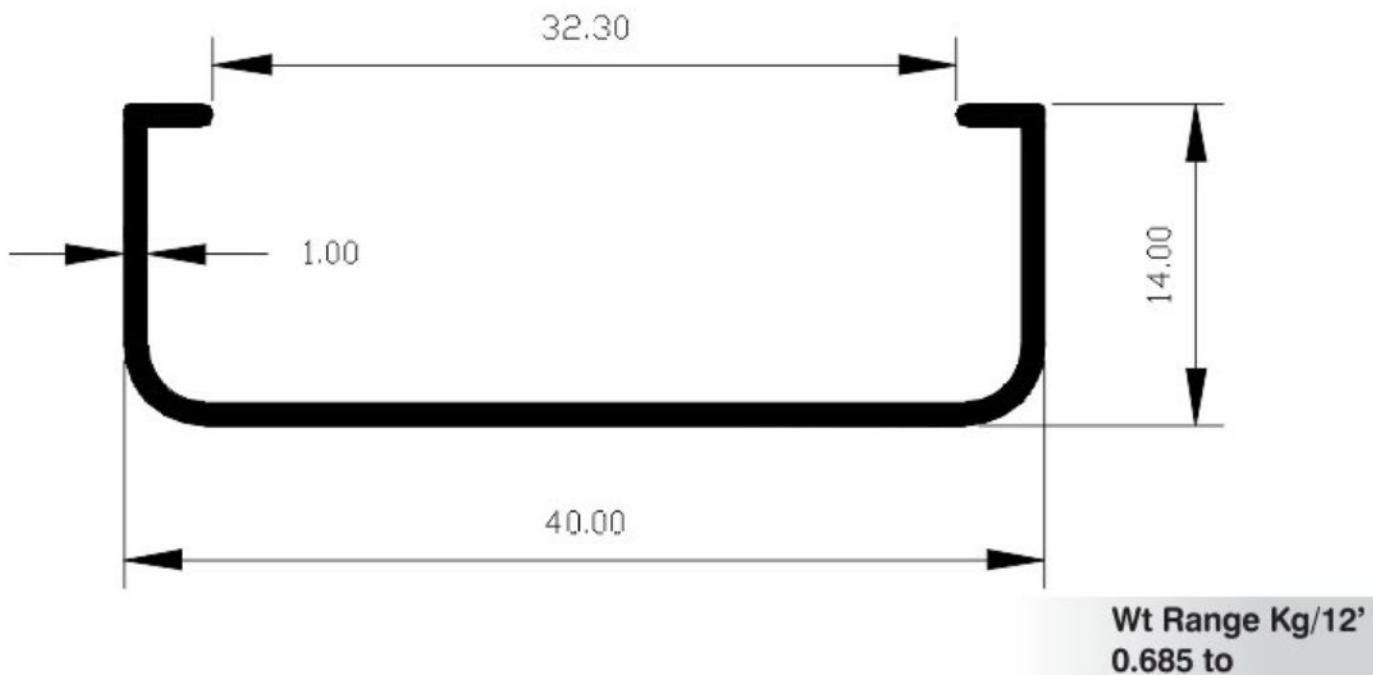




## SPECIAL SECTION

SP- 50

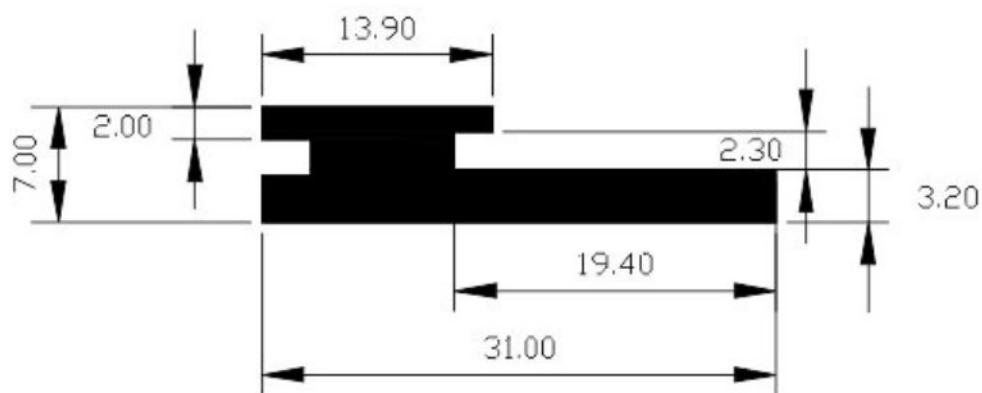

Wt Range Kg/12'  
1.375 to

SP- 51

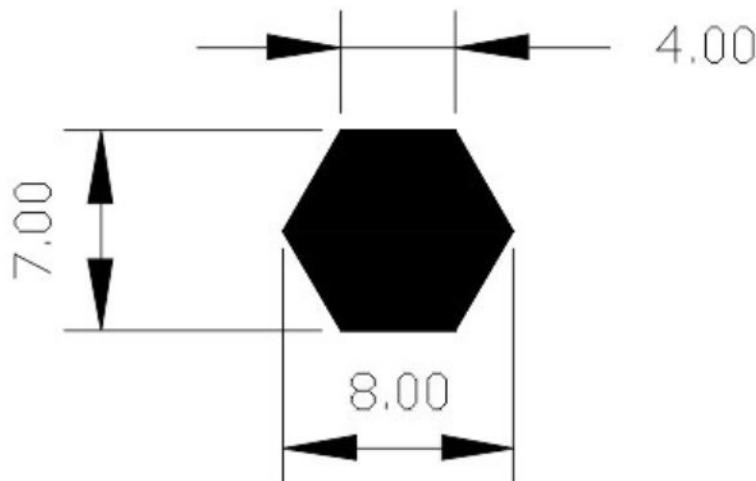


Wt Range Kg/12'  
0.410 to




## SPECIAL SECTION

SP- 52

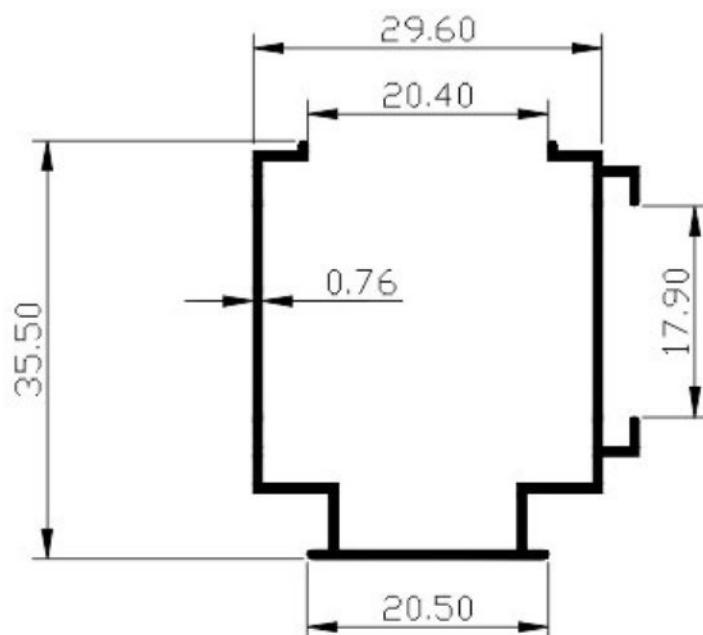

Wt Range Kg/12'  
0.920 to

SP- 53

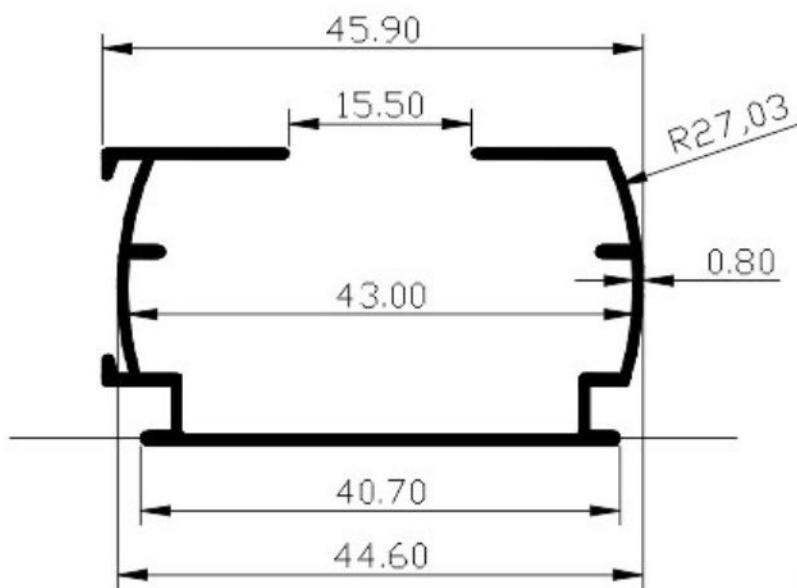


Wt Range Kg/12'  
1.200 to




## SPECIAL SECTION

SP- 54

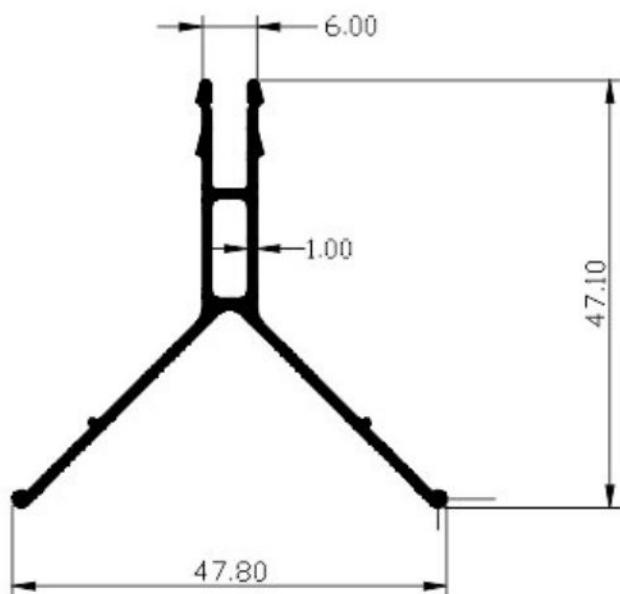

Wt Range Kg/12'  
1.200 to

SP- 55

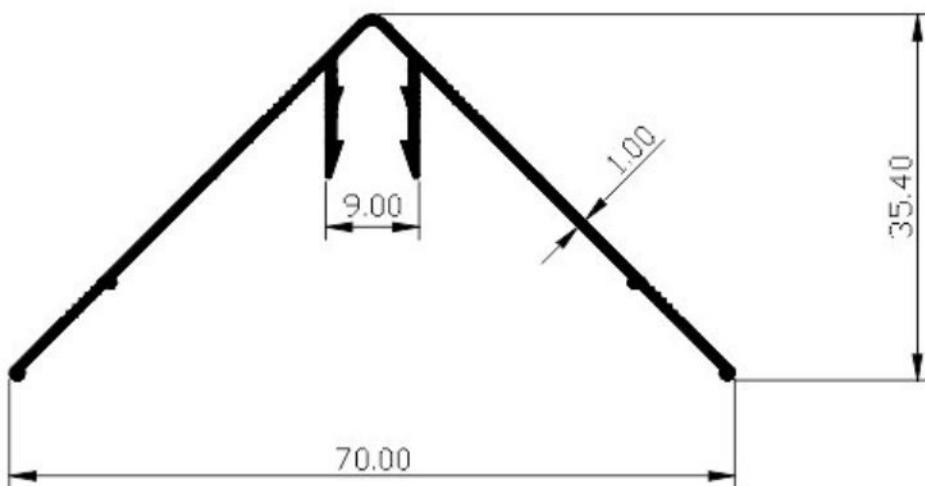


Wt Range Kg/12'  
1.531 to




## SPECIAL SECTION

### SP- 56 Plat Form Section

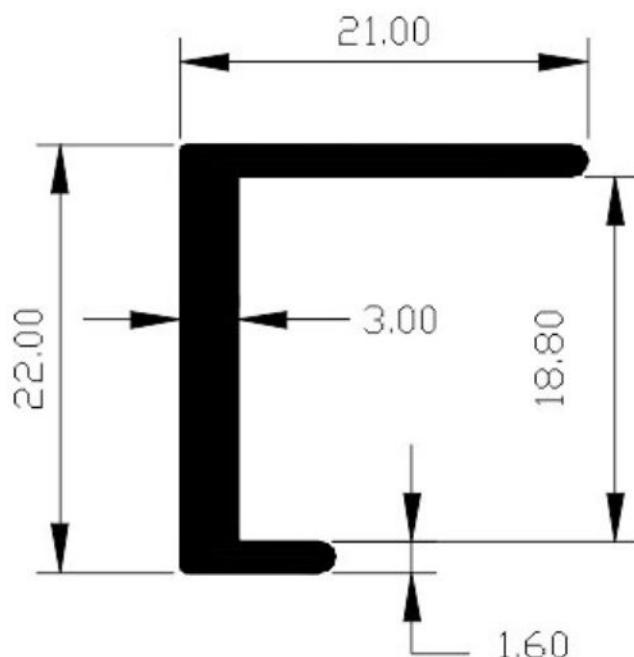

Wt Range Kg/12'  
1.000 to

### SP- 57 Plat Form Section

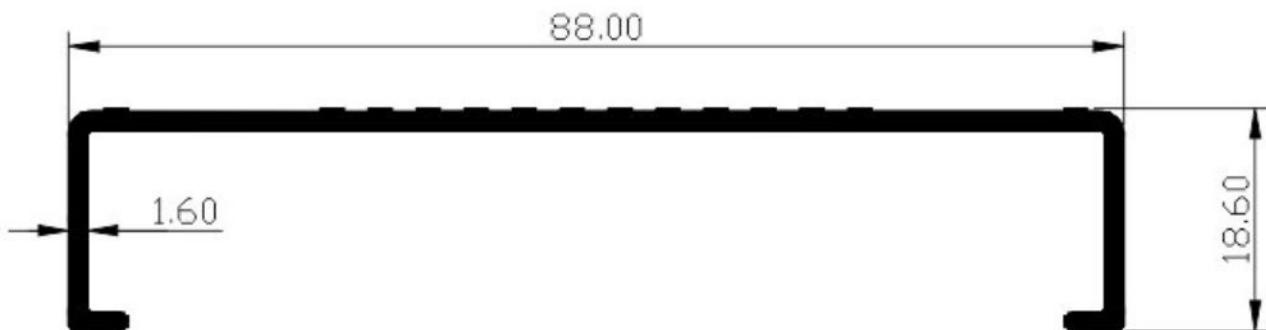


Wt Range Kg/12'  
2.080 to




## SPECIAL SECTION

SP- 58

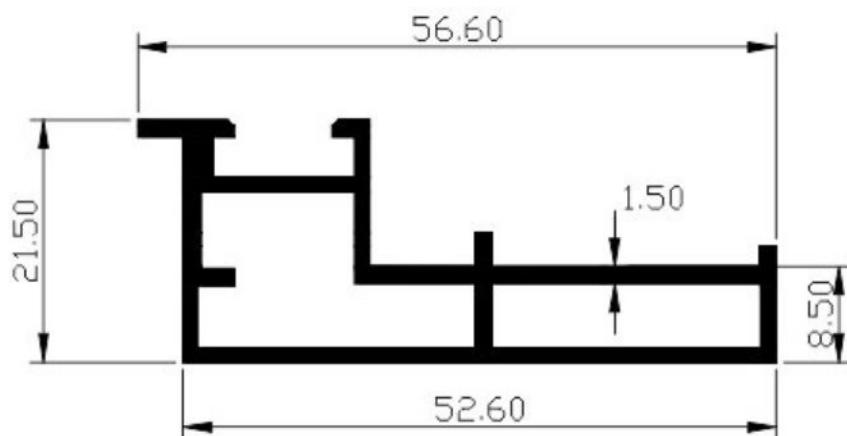

Wt Range Kg/12'  
2.300 to

SP- 59

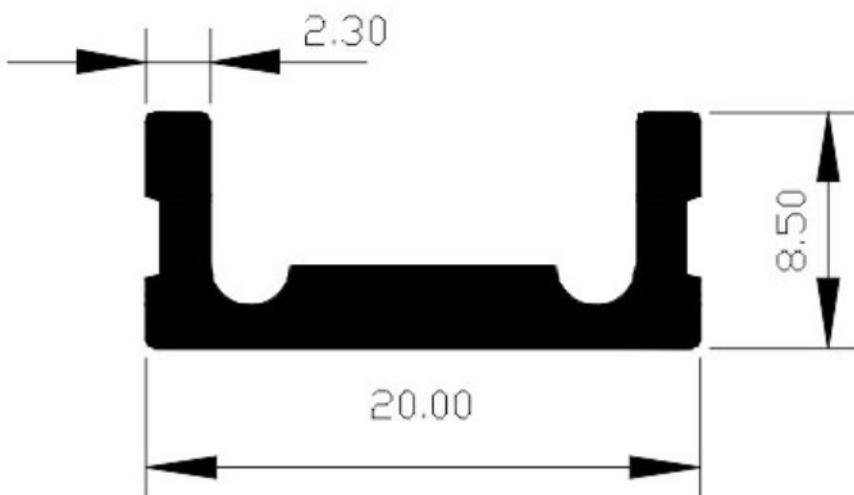


Wt Range Kg/12'  
0.752 to




## SPECIAL SECTION

SP- 60

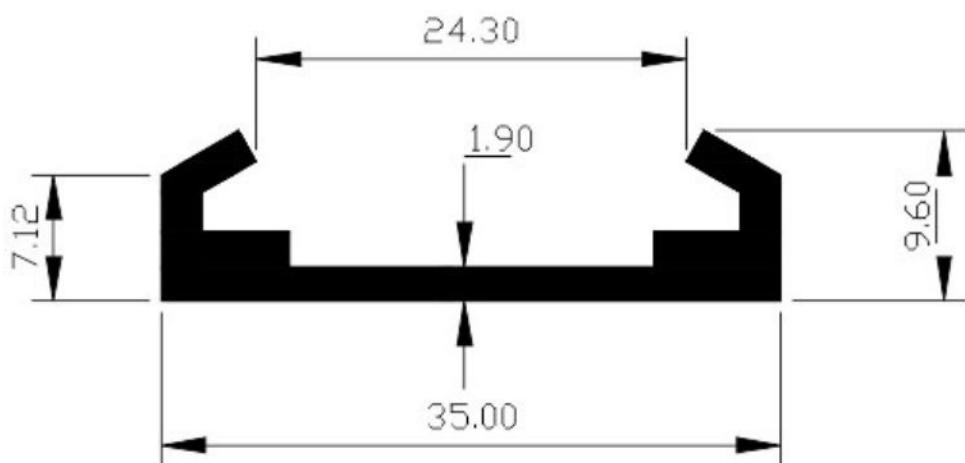

Wt Range Kg/12'  
1.250 to

SP- 61

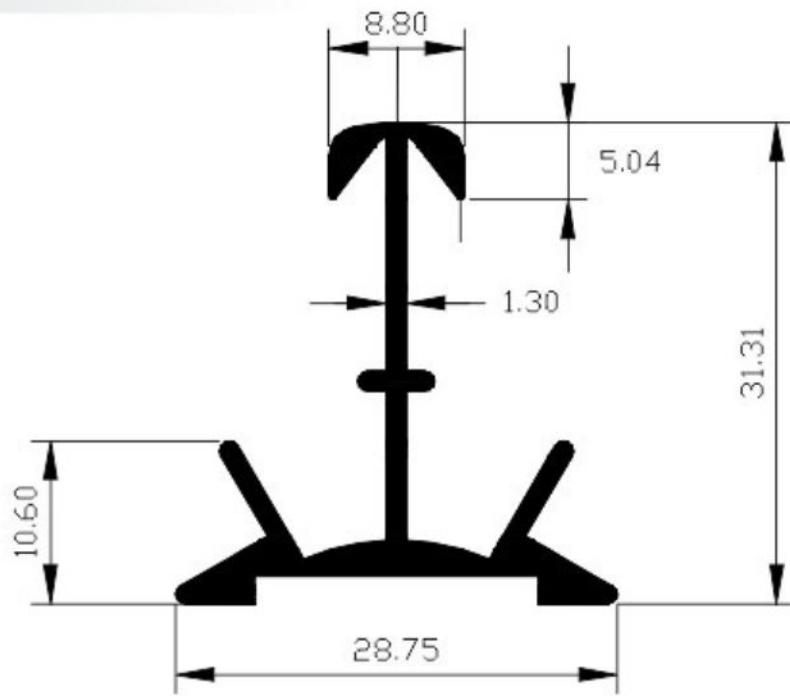


Wt Range Kg/12'  
1.400 to




# SPECIAL SECTION

## SP- 62 Slick

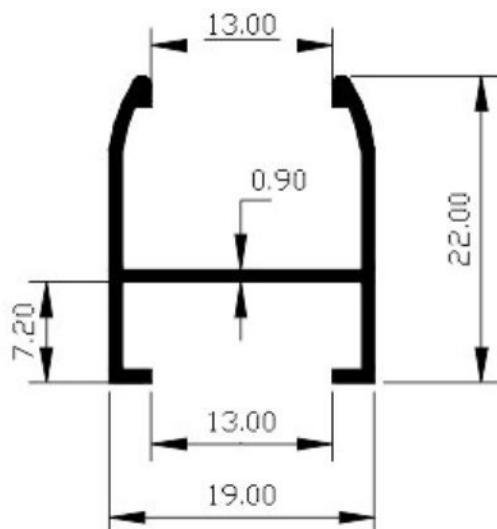

Wt Range Kg/12'  
0.610 to

## SP- 63 Curtain Wall

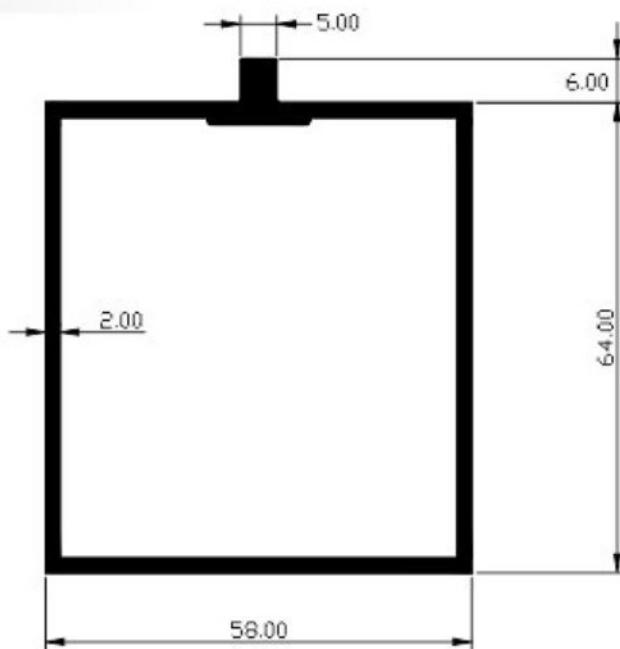


Wt Range Kg/12'  
5.160 to



# SPECIAL SECTION

SP- 64

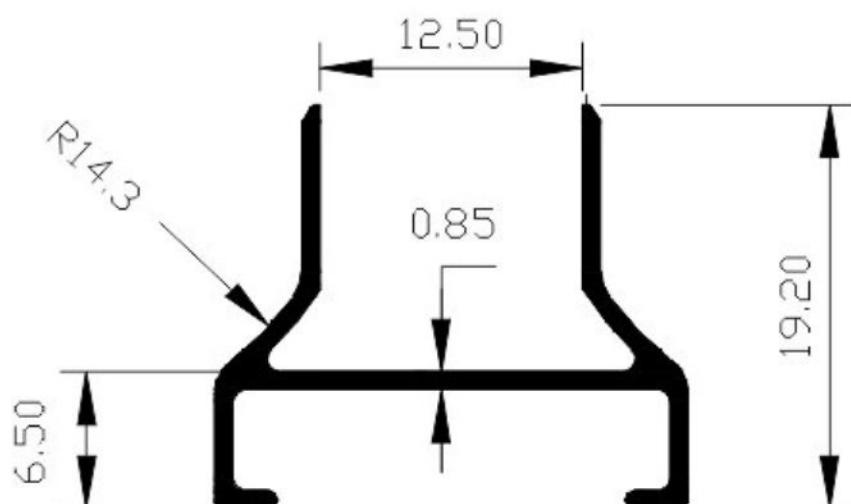


Wt Range Kg/12'  
0.575 to




## SPECIAL SECTION

SP- 65

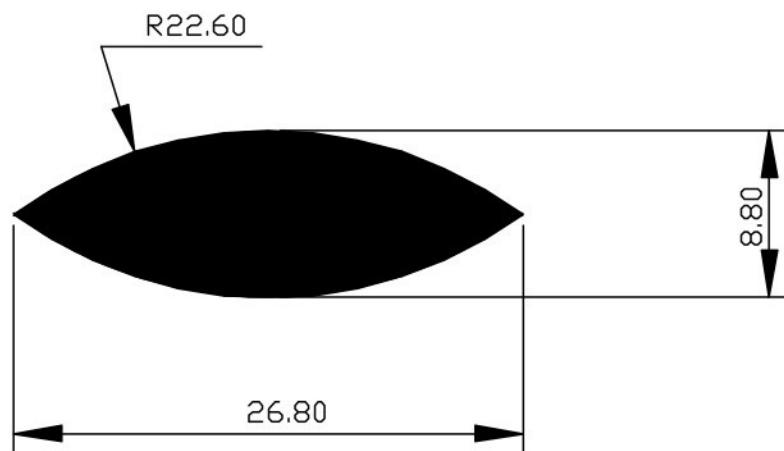

Wt Range Kg/12'  
1.575 to

SP- 66

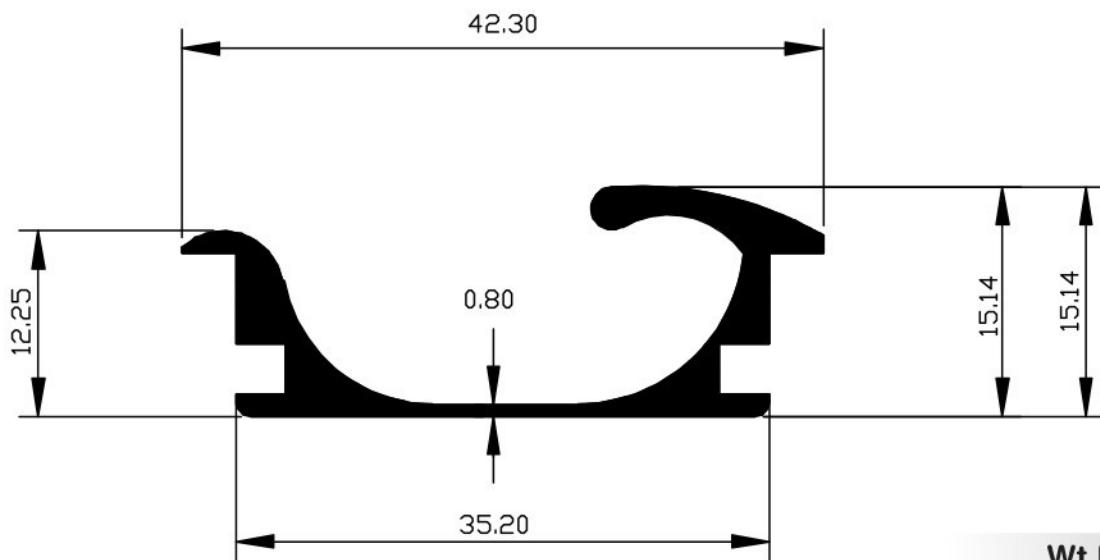


Wt Range Kg/12'  
1.400 to




## SPECIAL SECTION

SP- 67 Angle

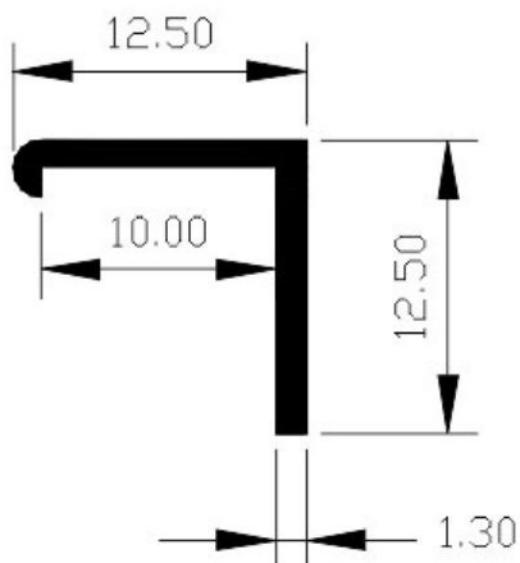

Wt Range Kg/12'  
0.290 to

SP- 68

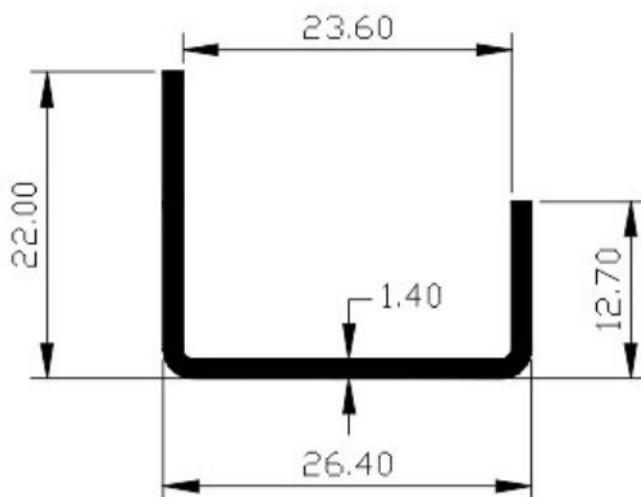


Wt Range Kg/12'  
0.800 to




# SPECIAL SECTION

SP- 69

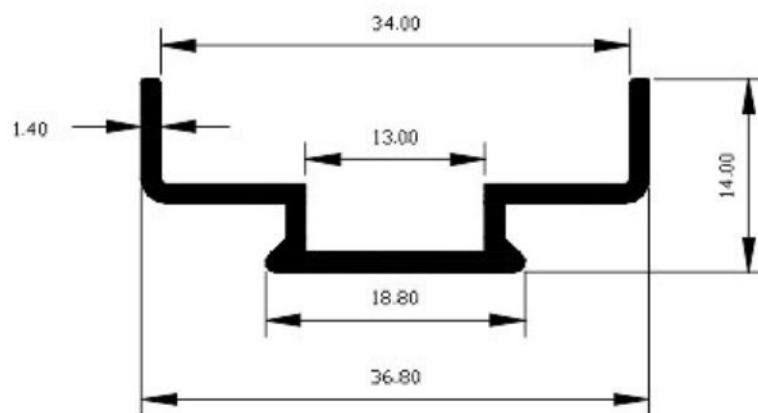


Wt Range Kg/12'  
0.900 to

SP- 70 F-Grill

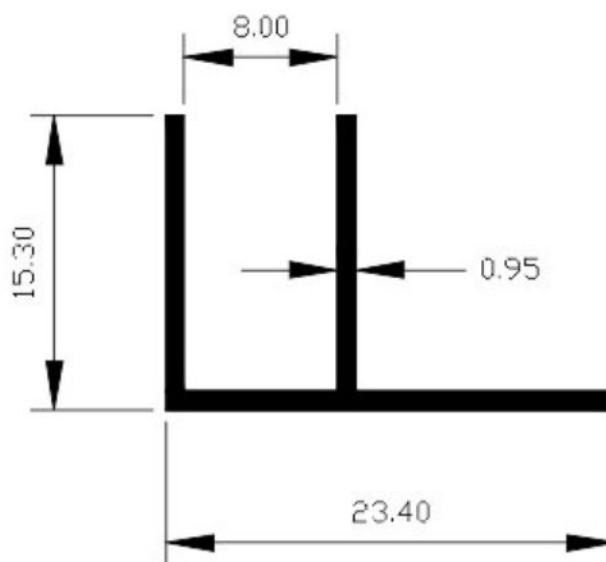


Wt Range Kg/12'  
0.495 to




# SPECIAL SECTION

SP- 72 Channel

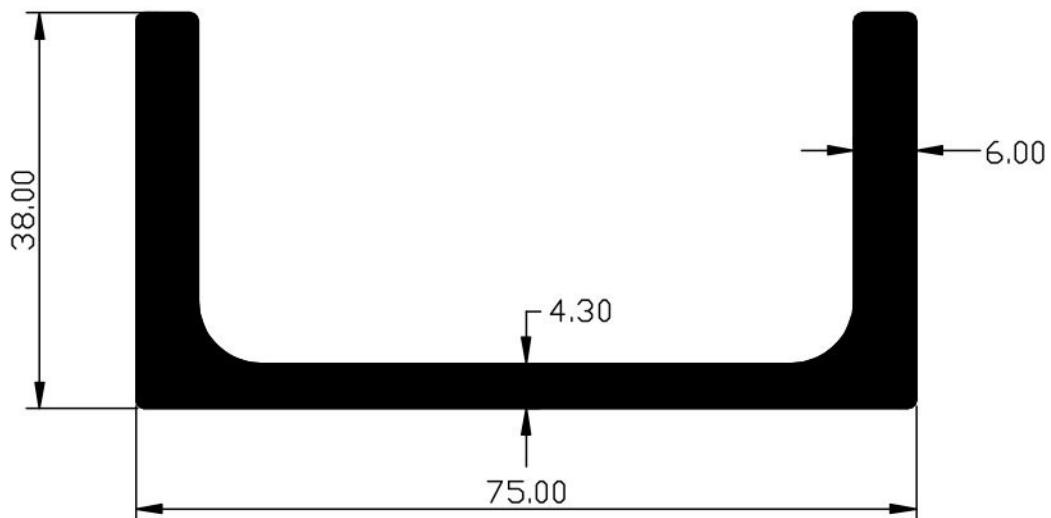


Wt Range Kg/12'  
7.275 to



# SPECIAL SECTION

SP- 86 Loover Channel

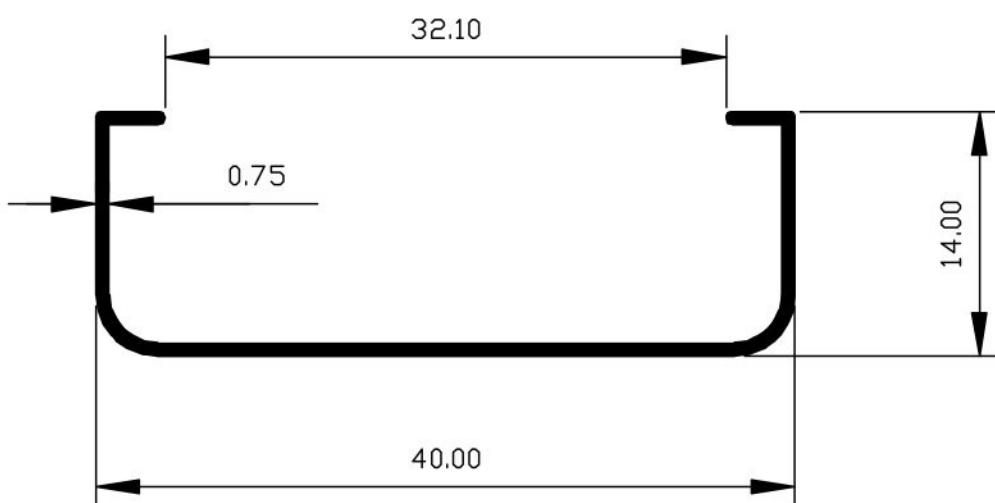


Wt Range Kg/12'  
0.525 to




## SPECIAL SECTION

### SP- 87 Channel

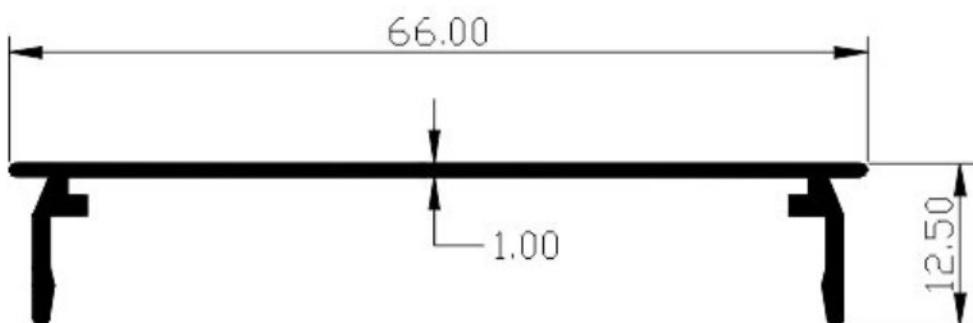

Wt Range Kg/12'  
1.050 to

### SP- 88 Angle

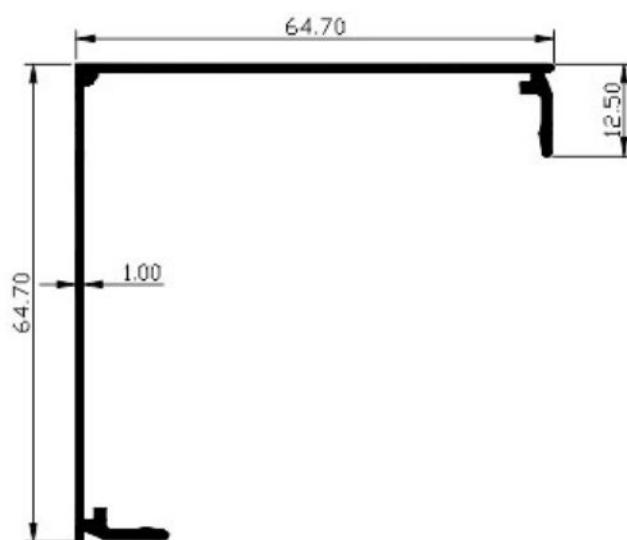


Wt Range Kg/12'  
1.700 to



# SPECIAL SECTION

## SP- 90 Special Section

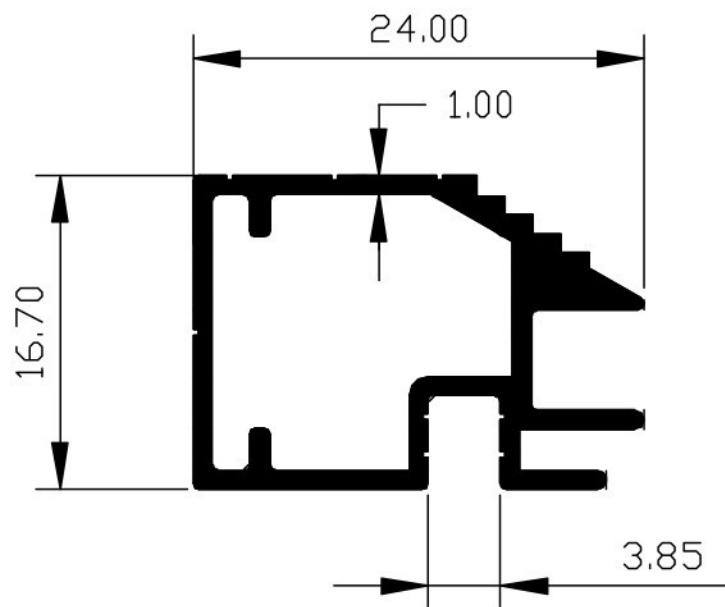


Wt Range Kg/12'  
0.940 to




## SPECIAL SECTION

### SP- 91 Radious Flat

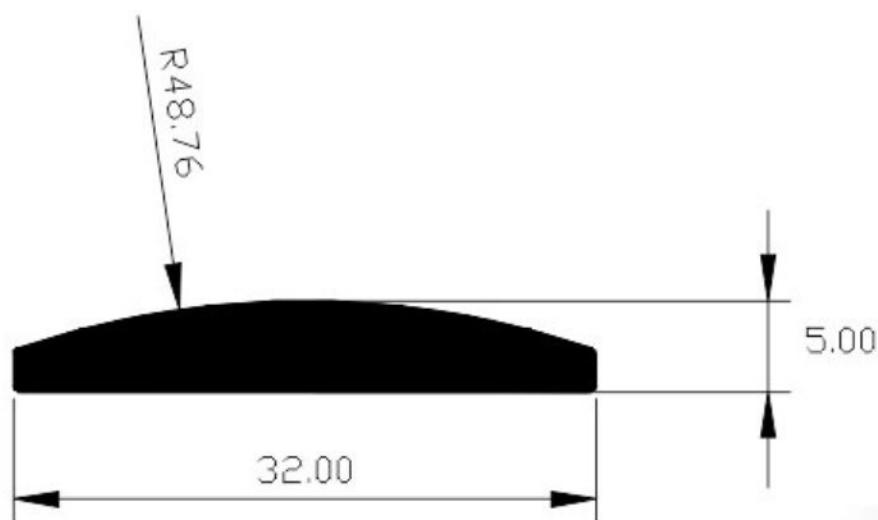

Wt Range Kg/12'  
1.300 to

### SP- 92 Special Section

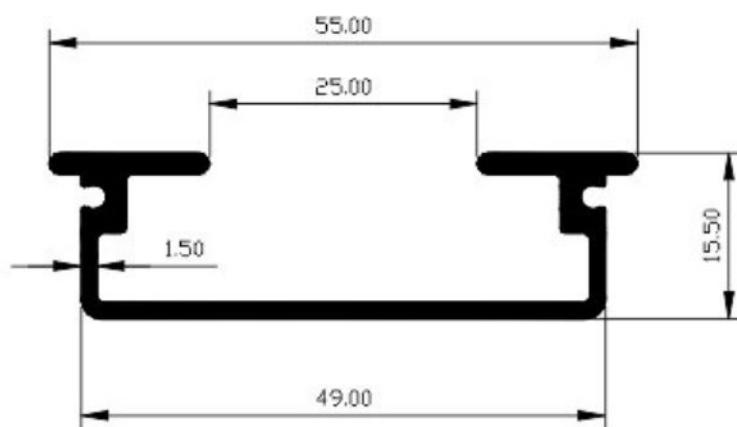


Wt Range Kg/12'  
1.875 to



# SPECIAL SECTION

SP- 95 Special Section

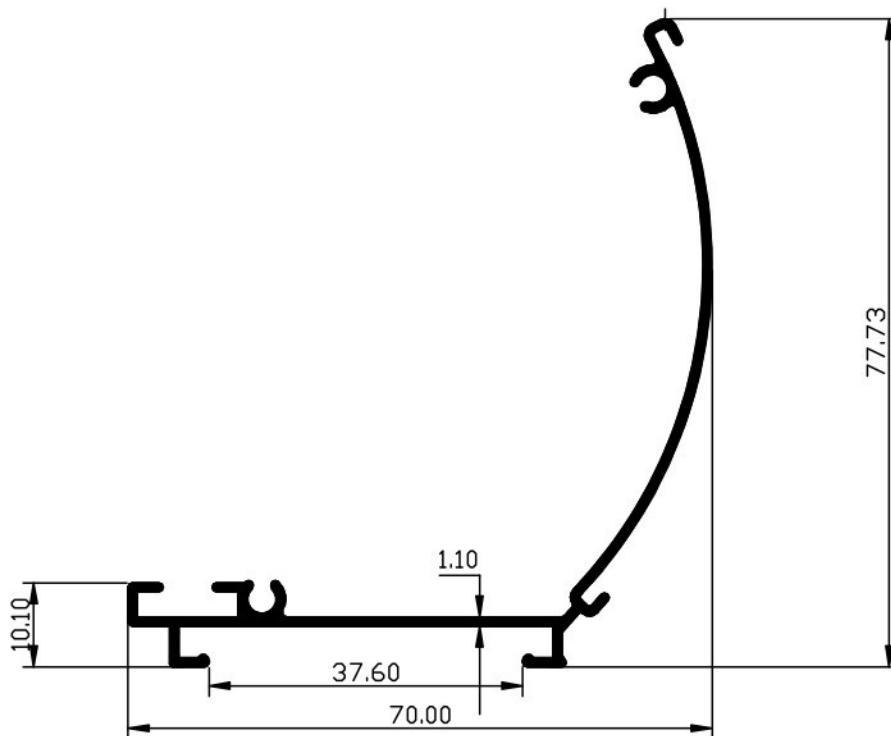


Wt Range Kg/12'  
2.000 to 2.200




## SPECIAL SECTION

SP- 144 Special Section

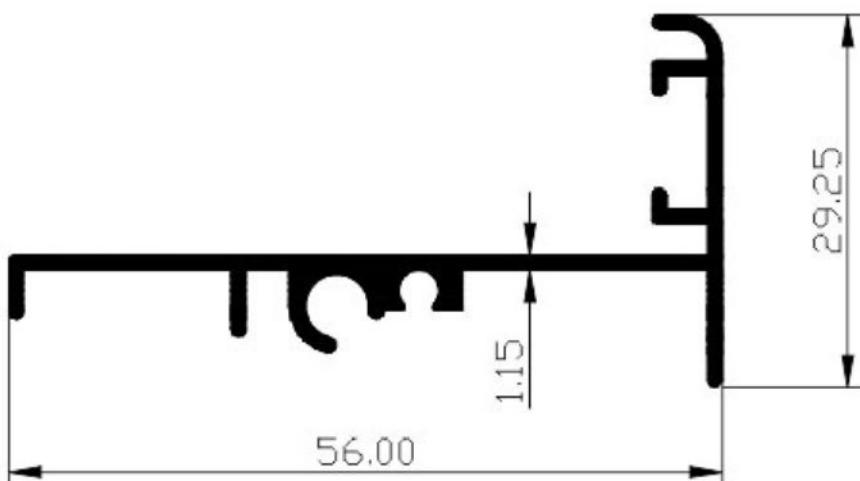

Wt Range Kg/12'  
1.530 to 1.730

SP- 145 Special Section

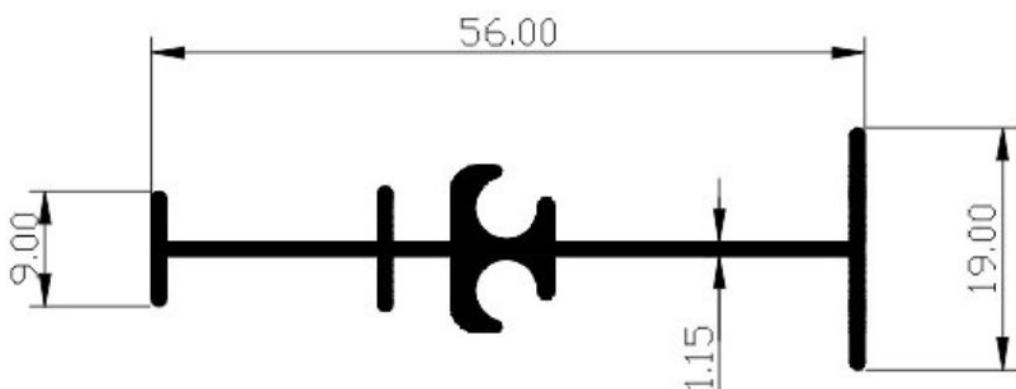


Wt Range Kg/12'  
1.450 to 1.650




## SPECIAL SECTION

SP- 133

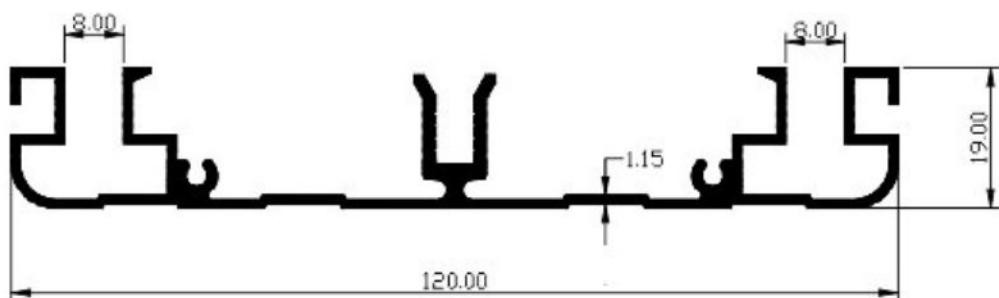

Wt Range Kg/12'  
3.700 to

SP- 134

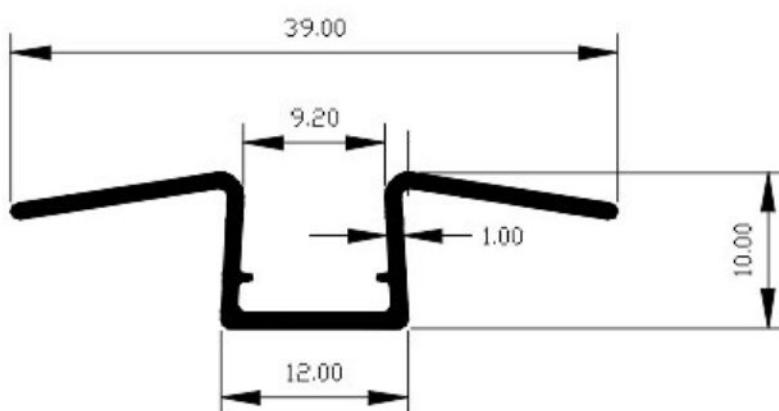


Wt Range Kg/12'  
0.500 to 0.700



# SPECIAL SECTION

## SP- 135 Mazda Section

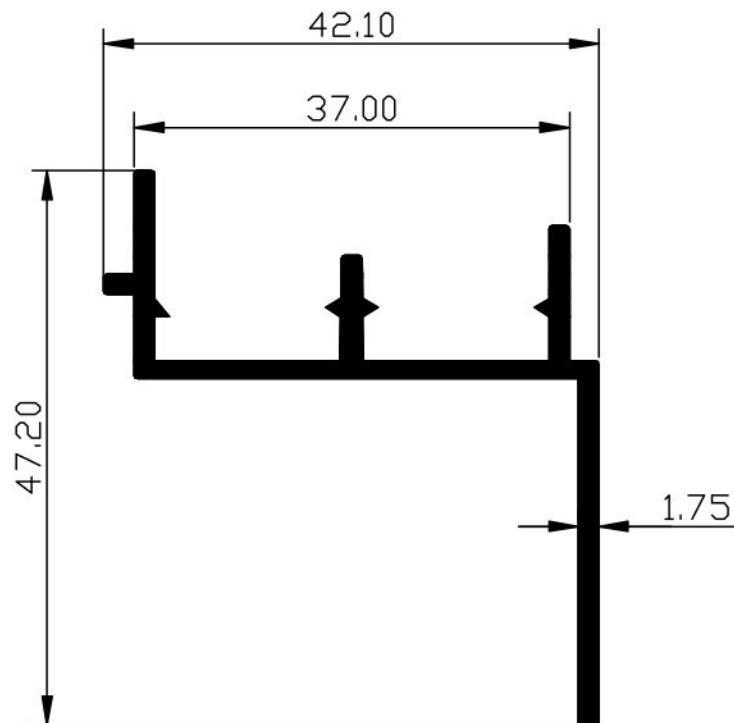


Wt Range Kg/12'  
1.810 to




## SPECIAL SECTION

SP- 137 Special Section

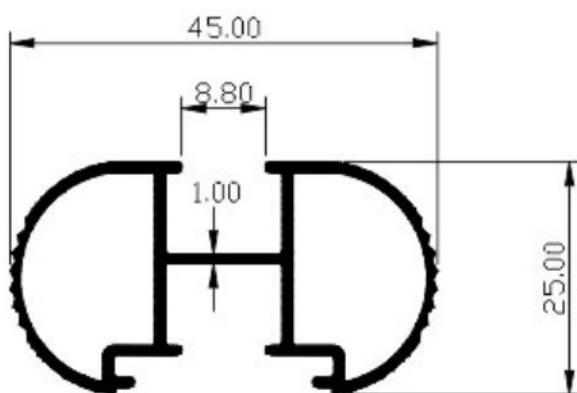

Wt Range Kg/12'  
1.620 to

SP- 138 Ellipse Section

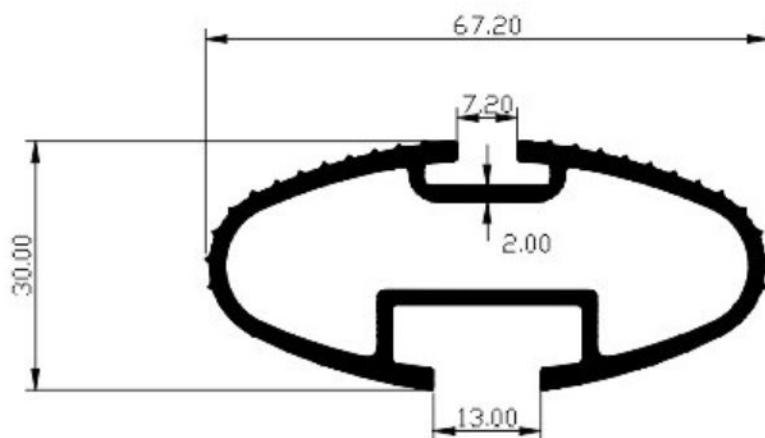


Wt Range Kg/12'  
3.800 to




## SPECIAL SECTION

SP- 139 Special Section

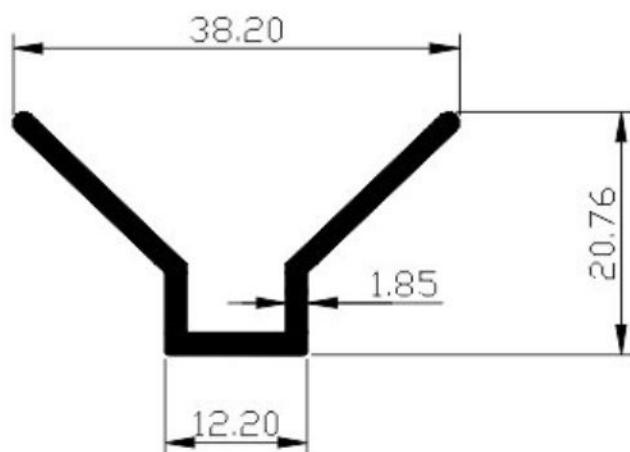

Wt Range Kg/12'  
1.100 to 1.350

SP- 140 Special Section

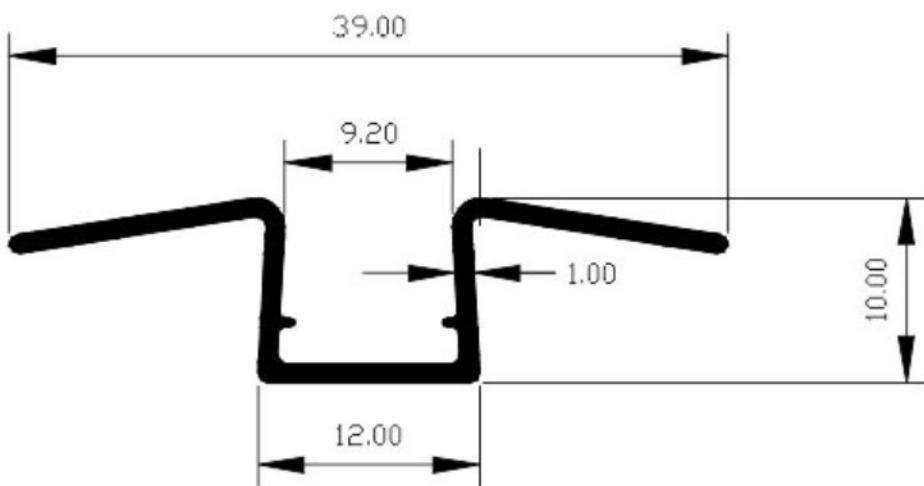


Wt Range Kg/12'  
4.825 to




# SPECIAL SECTION

## SP- 142 Special Section

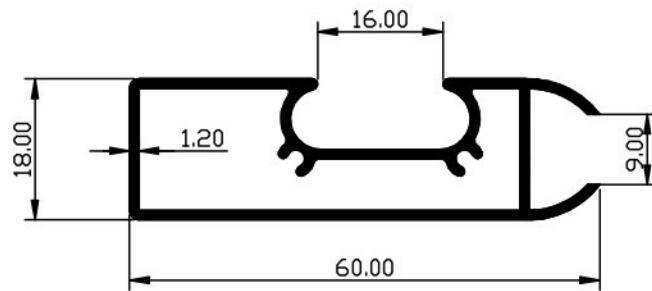

Wt Range Kg/12'  
2.200 to

## SP- 143 Special Section

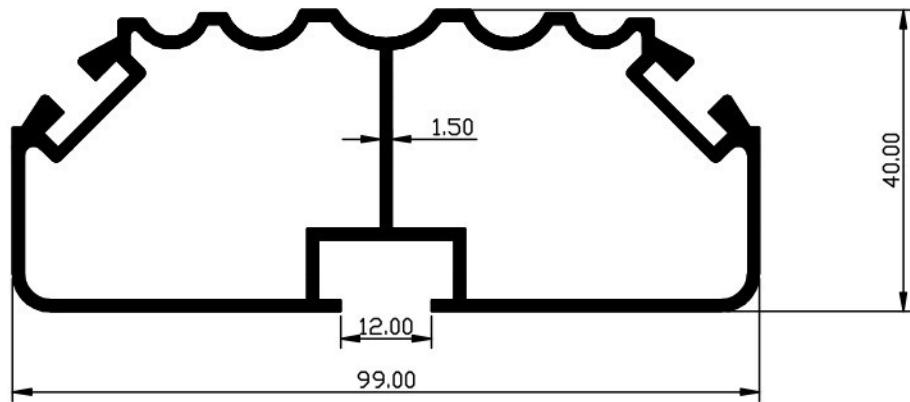


Wt Range Kg/12'  
5.400 to 5.700



# SPECIAL SECTION

SP- 146 Special Section

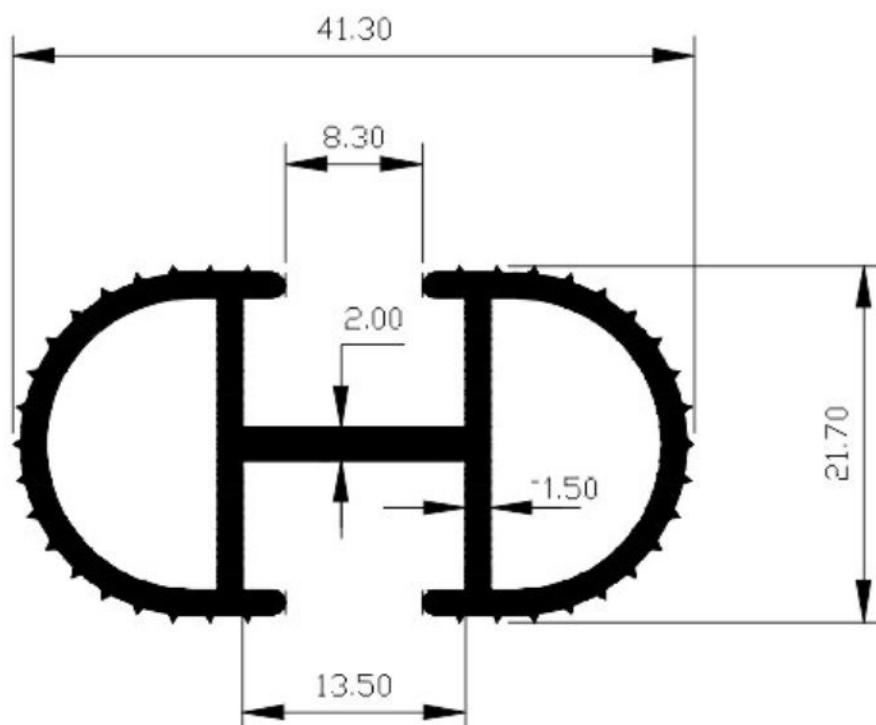


Wt Range Kg/12'  
2.100 to 2.300



# SPECIAL SECTION

SP- 205 Special Section

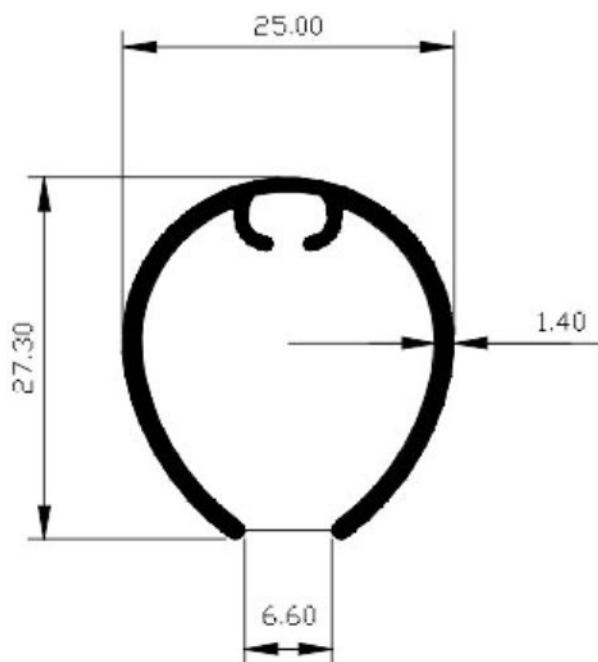


Wt Range Kg/12'  
1.050 to 1.250




## SPECIAL SECTION

### SP- 206 Clamp Section

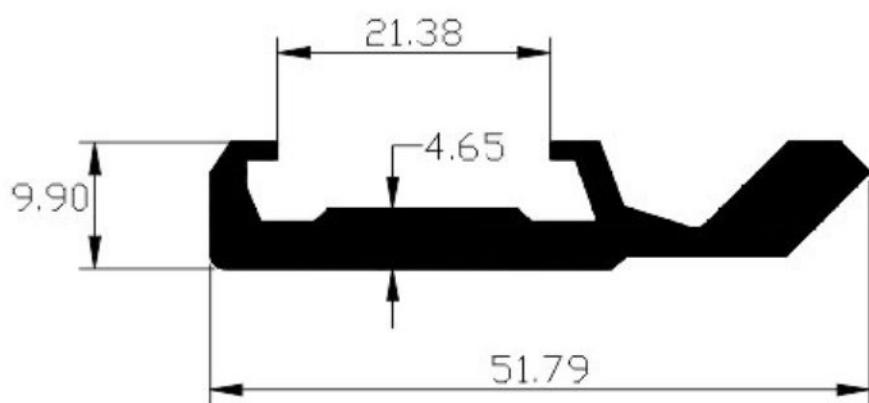

Wt Range Kg/12'  
2.600 to 2.800

### SP- 207 Clamp Section

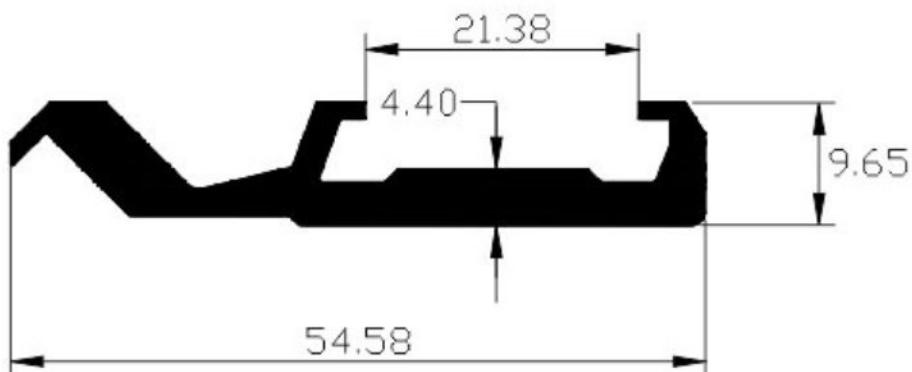


Wt Range Kg/12'  
2.500 to 2.700




## SPECIAL SECTION

### SP- 208 Special Section

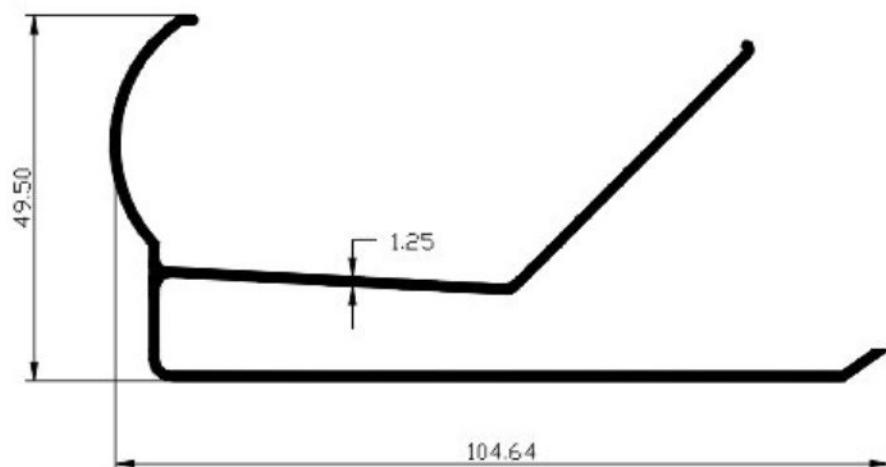

Wt Range Kg/12'  
3.100 to 3.300

### SP- 209 Special Section

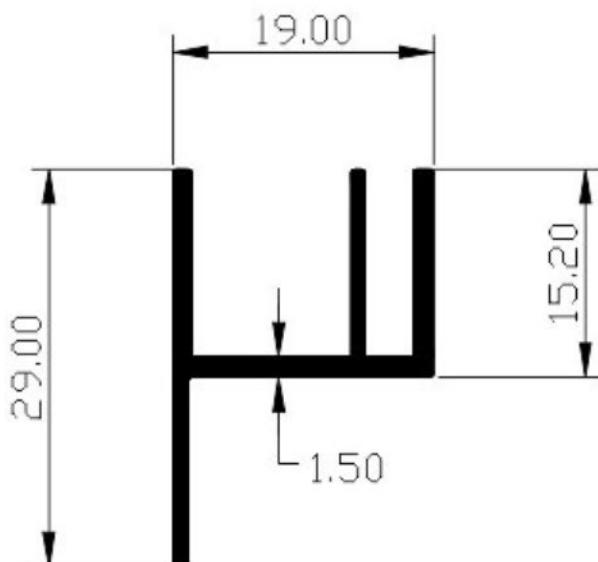


Wt Range Kg/12'  
0.970 to 1.170




# SPECIAL SECTION

SP- 210 Special Section

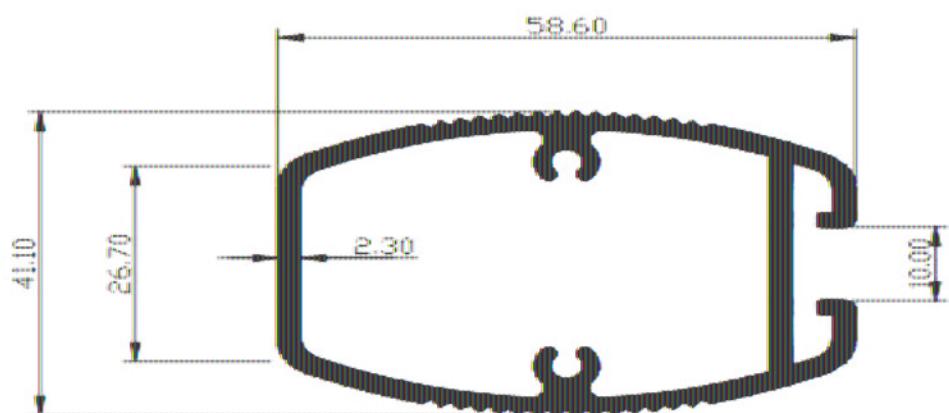


SP- 211 Special Section

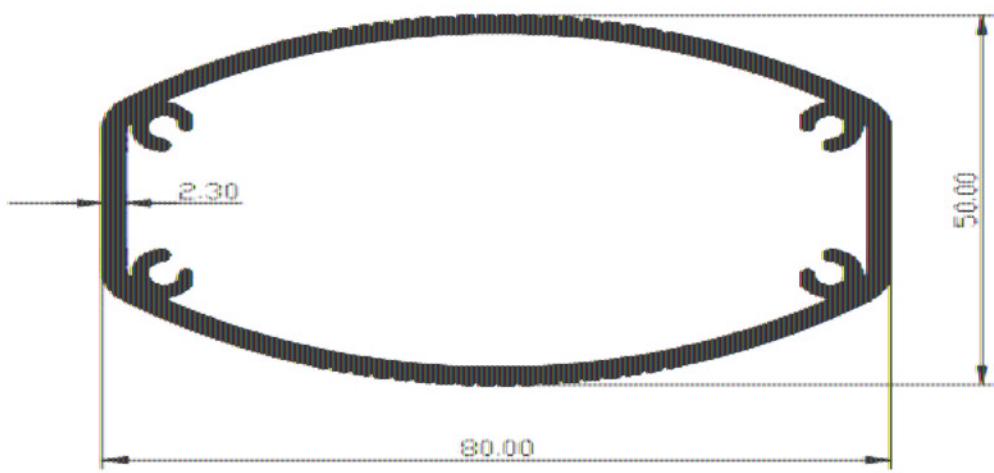



# SPECIAL SECTION

## SP- 212 Board Section

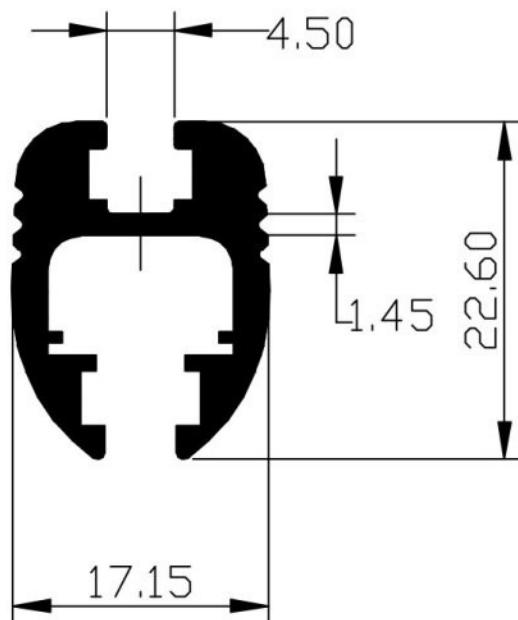


Wt Range Kg/12'  
1.600 to 1.800




# SPECIAL SECTION

## SP- 213 Special Section

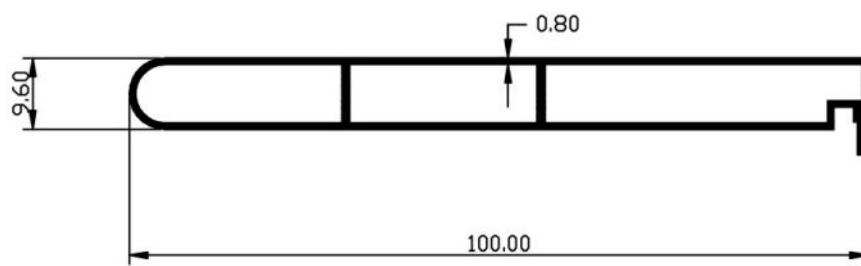

Wt Range Kg/12'  
1.800 to 2.000

## SP- 214 Special Section




Wt Range Kg/12'  
0.530 to 0.730




# SPECIAL SECTION

## SP- 201 Special Section

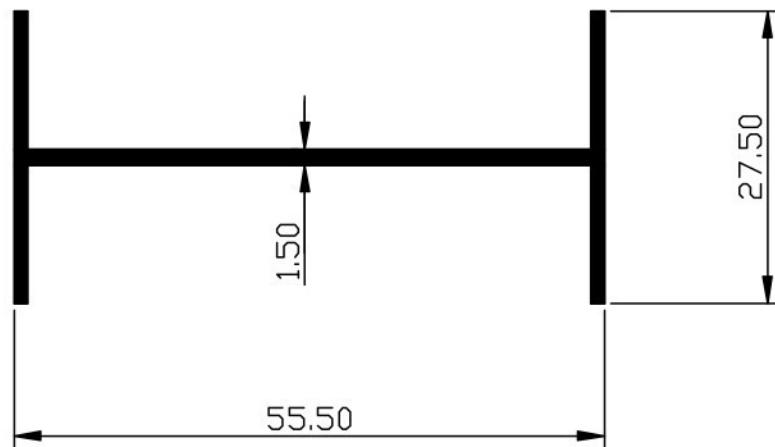

Wt Range Kg/12'  
6.500 to 6.700

## SP- 202 Special Section

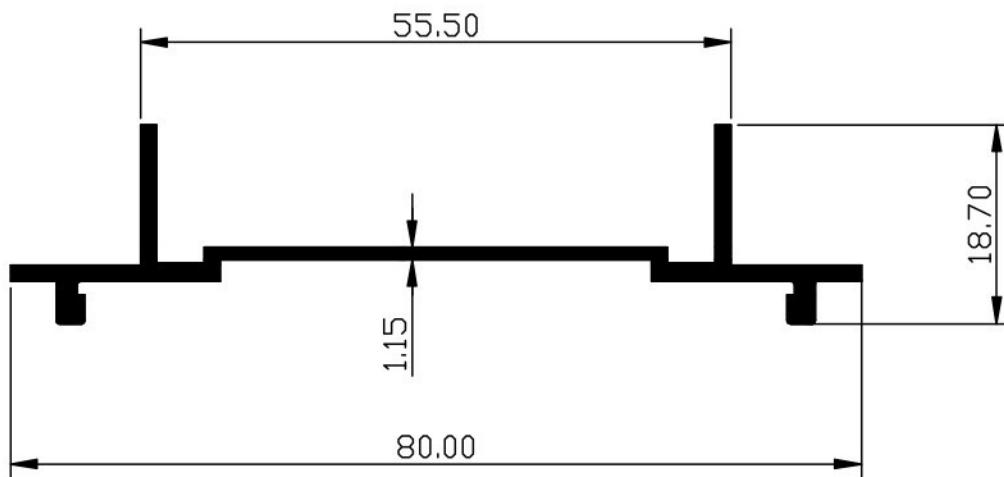


Wt Range Kg/12'  
5.500 to 5.700



# SPECIAL SECTION

SP- 215 Special Section

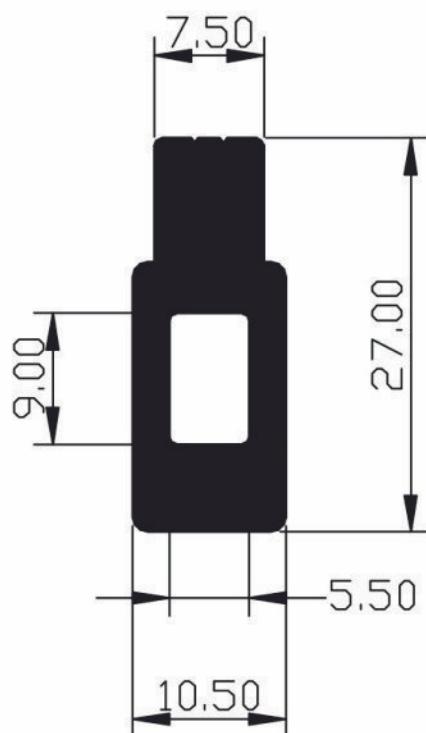


Wt Range Kg/12'  
2.070 to 2.270



# SPECIAL SECTION

SP- 1123 G-Channel

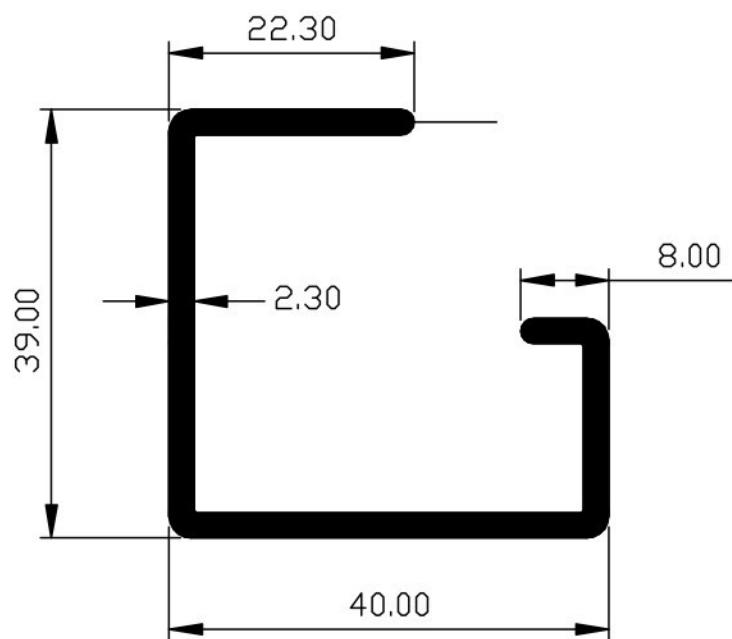


Wt Range Kg/12'  
2.700 to




## SPECIAL SECTION

### SP- 201 Special Section

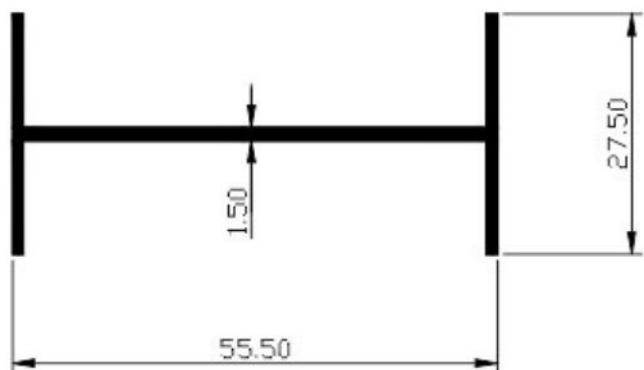

Wt Range Kg/12'  
1.475 to 1.675

### SP- 202 Special Section

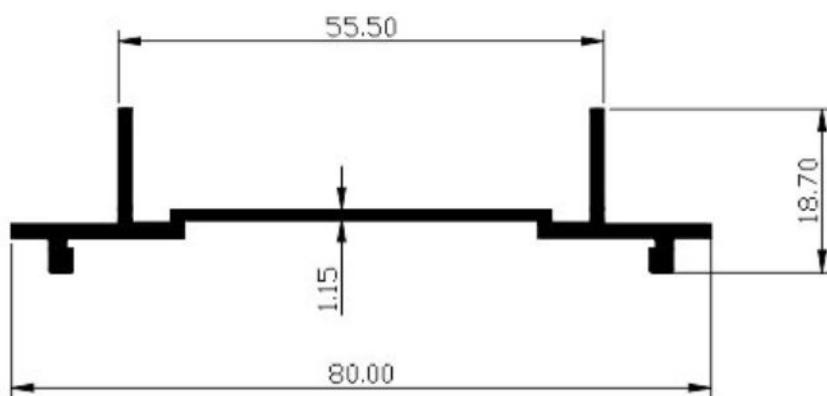


Wt Range Kg/12'  
1.725 to 1.925




# SPECIAL SECTION

## SP- 147 Groove Pipe

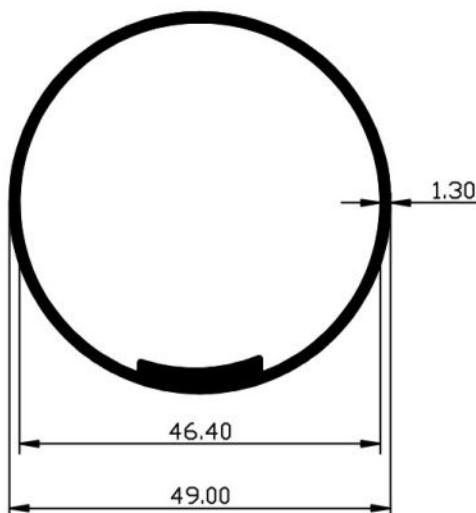

Wt Range Kg/12'  
2.200 to 2.400

## SP- 148 Channel Typ

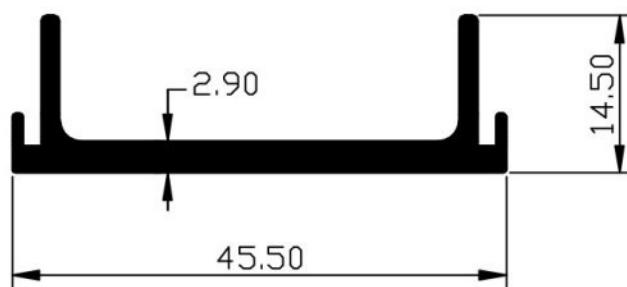


Wt Range Kg/12'  
1.750 to 1.950




# SPECIAL SECTION

## SP- 149 Special

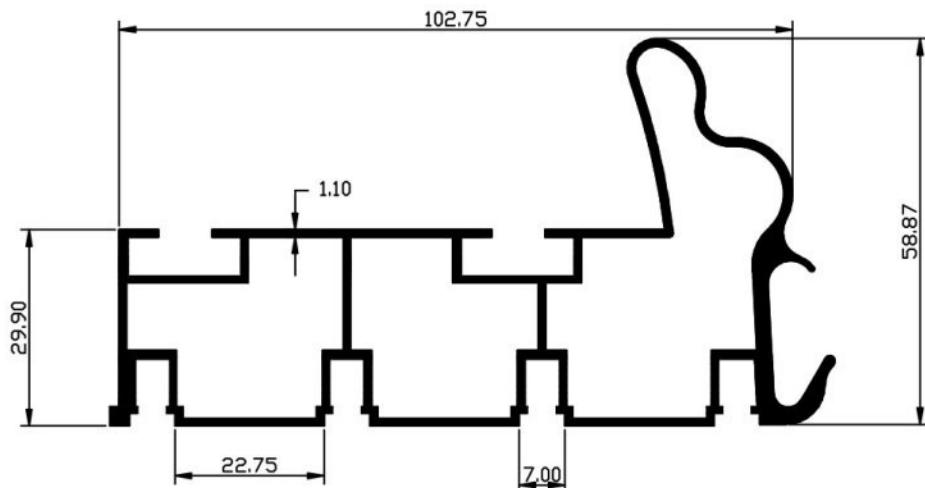

Wt Range Kg/12'  
5.950 to 6.150

## SP- 150 Double Hollow

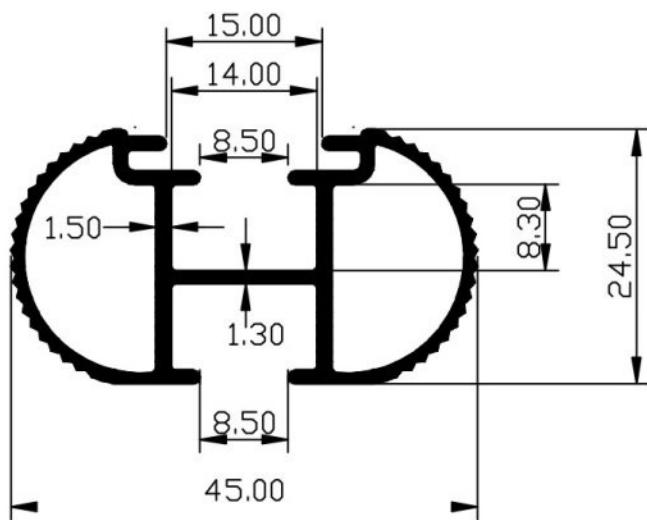


Wt Range Kg/12'  
1.950 to 2.150



# SPECIAL SECTION

SP- 151 Carrier Section

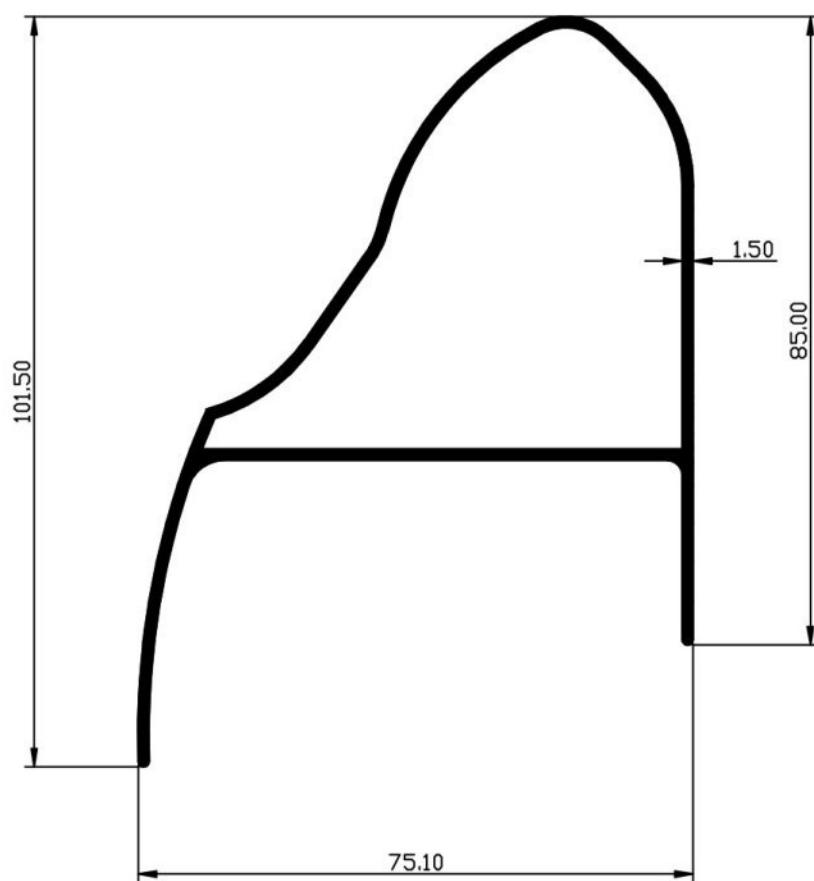

Wt Range Kg/12'  
4.250 to 4.450