




ARCHITECTURAL


3/4" SERIES

Top - Bottom

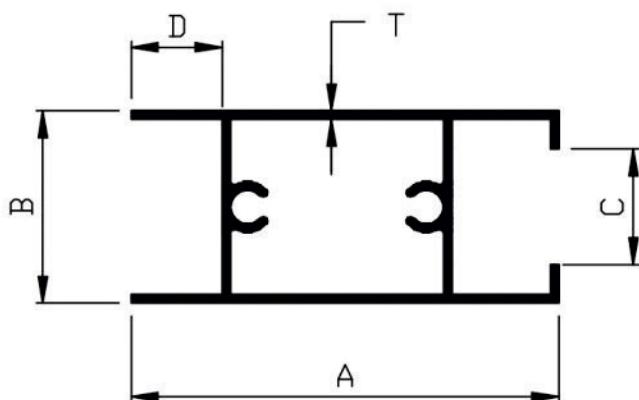

		Sectional Dimension						
Sr. No.	Die No.	A	B	C	D	T	Wt Range Kg/12'	
1	1033	40.00	18.00	10.50	8.50	0.75	1.000	1.200
2	1023	40.00	18.00	10.50	8.50	1.40	1.800	1.950

Inter Lock

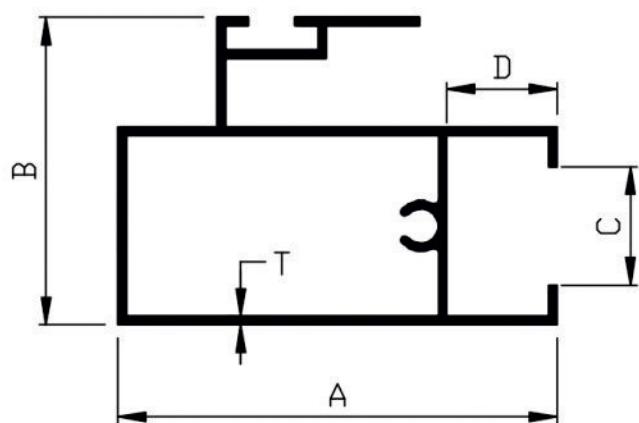


		Sectional Dimension						
Sr. No.	Die No.	A	B	C	D	T	Wt Range Kg/12'	
1	1034	40.00	28.00	10.50	10.00	0.85	1.300	1.500
2	1034	40.00	28.00	10.50	10.00	1.32	2.000	2.200



ARCHITECTURAL


3/4" SERIES

Handle

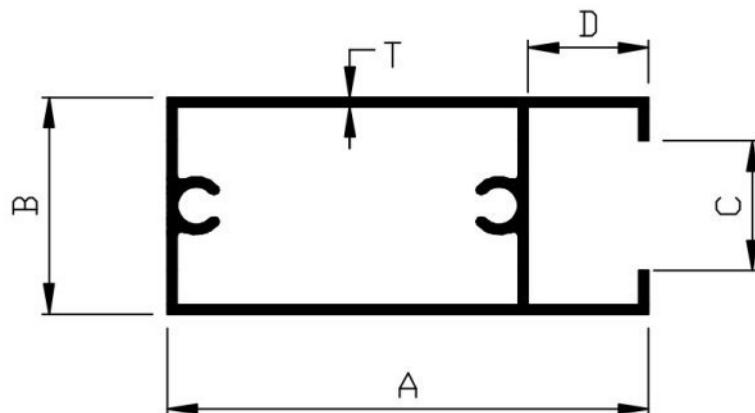

		Sectional Dimension						
Sr. No.	Die No.	A	B	C	D	T	Wt Range Kg/12'	
1	1035	40.00	18.00	10.50	10.00	0.75	1.000	1.200
2	1025	40.00	18.00	10.50	10.00	1.40	1.800	1.950

Top-Bottom Middle

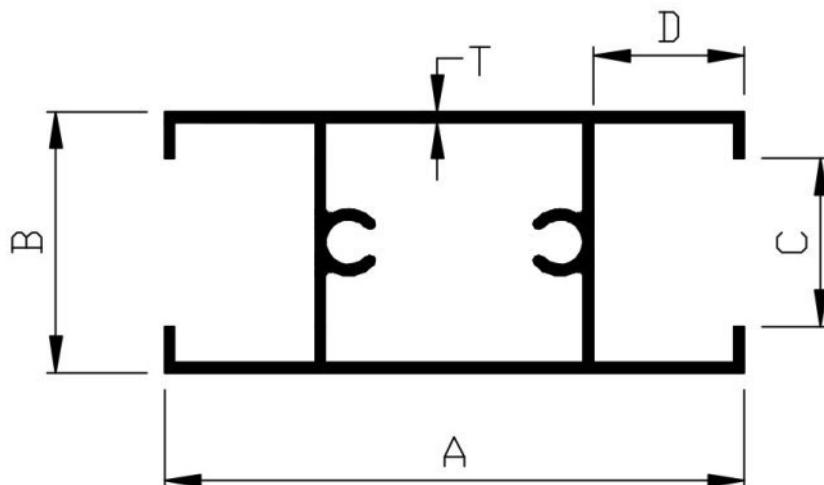


		Sectional Dimension						
Sr. No.	Die No.	A	B	C	D	T	Wt Range Kg/12'	
1	1080	40.00	18.00	10.50	10.40	0.70	1.000	1.200



ARCHITECTURAL

3/4" SERIES

Top - Bottom Bearing

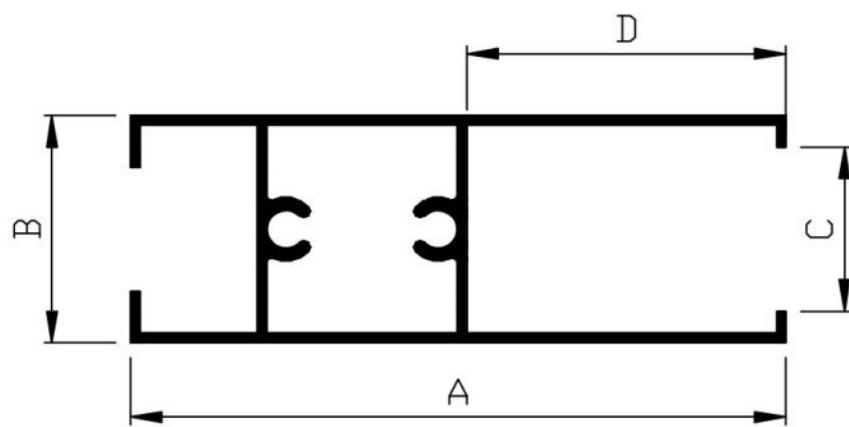


		Sectional Dimension						
Sr. No.	Die No.	A	B	C	D	T	Wt Range Kg/12'	
1	1012	52.00	18.00	13.00	25.30	0.72	1.200	1.400



ARCHITECTURAL


3/4" SERIES

Two Track Top

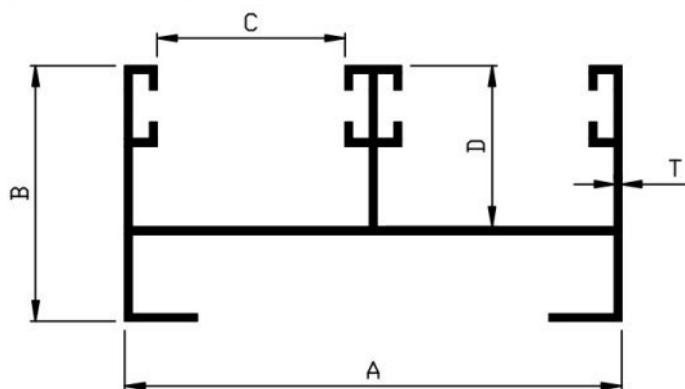

		Sectional Dimension					Wt Range Kg/12'	
Sr. No.	Die No.	A	B	C	D	T		
1	1057	61.85	31.75	23.43	20.00	0.77	1.600	1.800
2	1057/A	61.85	31.75	23.43	20.00	0.87	1.800	2.000
3	1027	61.85	31.75	23.43	20.00	1.45	2.700	2.900

Two Track Top Bottom

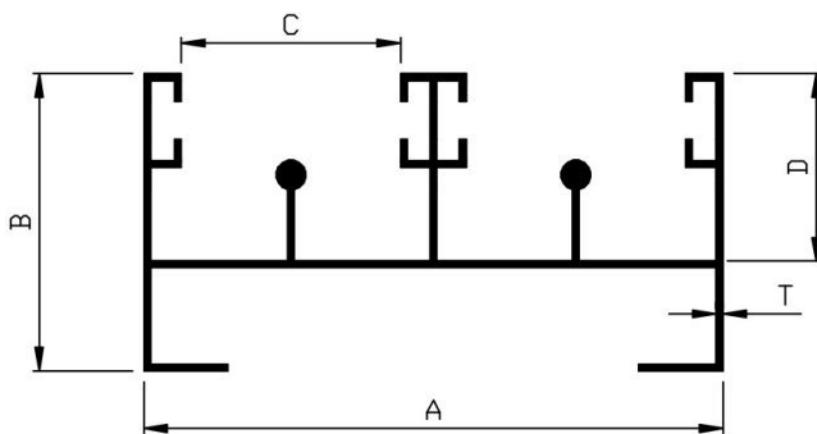


		Sectional Dimension					Wt Range Kg/12'	
Sr. No.	Die No.	A	B	C	D	T		
1	1058	61.85	31.75	23.43	20.00	0.71	1.700	1.900
2	1058/A	61.85	31.75	23.43	20.00	0.95	2.200	2.400
3	1058	61.85	31.75	23.43	20.00	1.45	3.100	3.400




ARCHITECTURAL

1047 Two Rack Top with Partition

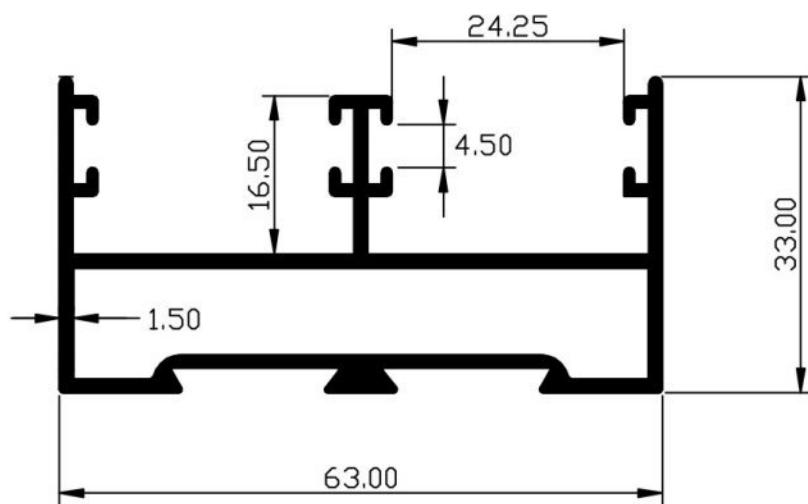


Wt Range Kg/12'
3.600 to 3.800

1048 Two Rack Bottom with Partition

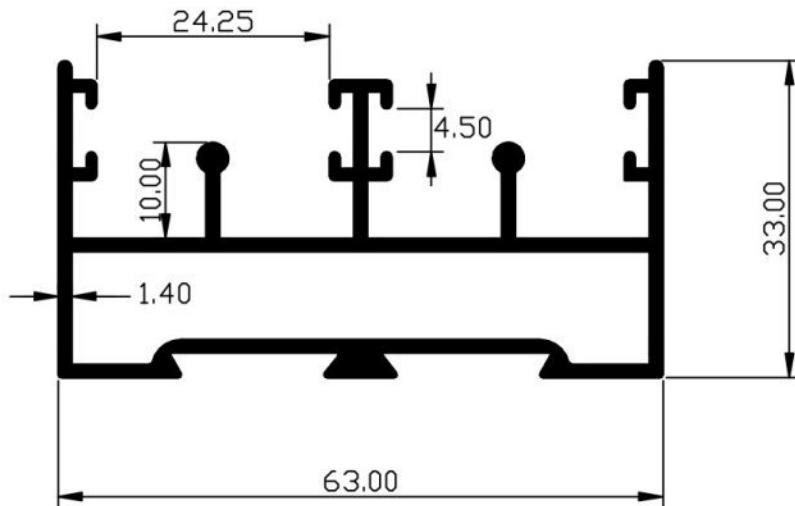


Wt Range Kg/12'
3.750 to 3.950



ARCHITECTURAL


3/4" SERIES

Three Track Top

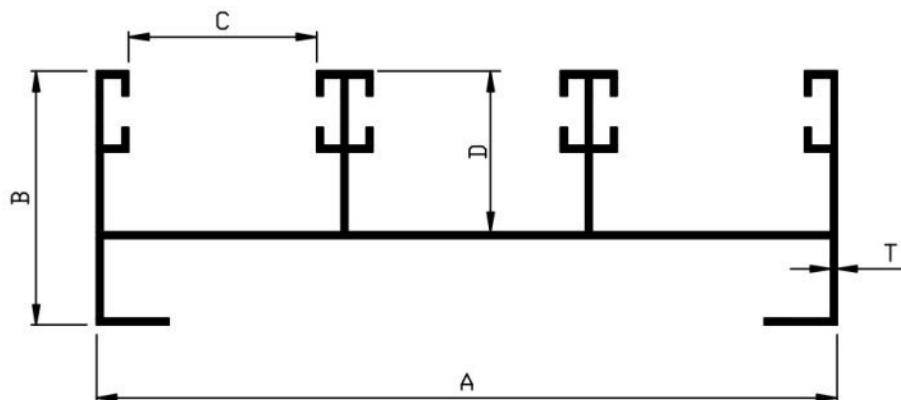

		Sectional Dimension						
Sr. No.	Die No.	A	B	C	D	T	Wt Range Kg/12'	
1	1031	92.00	31.50	23.33	20.00	0.72	2.000	2.200
2	1031/A	92.00	31.50	23.33	20.00	0.93	2.500	2.700
3	1031	92.00	31.50	23.33	20.00	1.50	3.700	3.900

Three Track Top Bottom

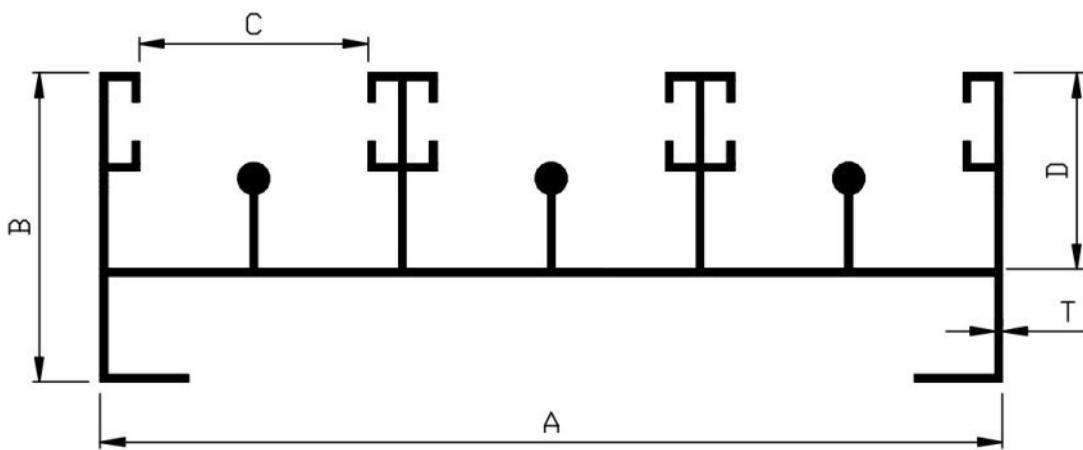


		Sectional Dimension						
Sr. No.	Die No.	A	B	C	D	T	Wt Range Kg/12'	
1	1032	92.00	31.50	23.43	20.00	0.73	2.700	2.900
2	1032/A	92.00	31.50	23.43	20.00	0.98	5.200	3.400
3	1022	92.00	31.50	23.43	20.00	1.60	4.500	4.700



ARCHITECTURAL


3/4" SERIES

Four Track Top

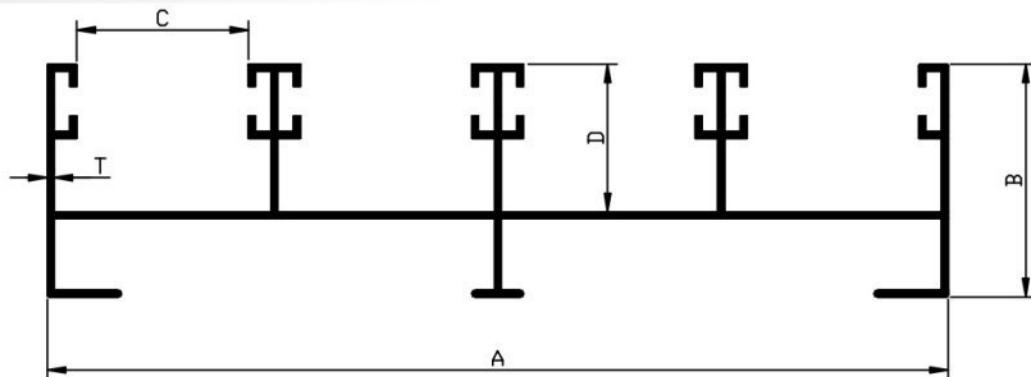


		Sectional Dimension						
Sr. No.	Die No.	A	B	C	D	T	Wt Range Kg/12'	
1	1071	122.00	31.50	23.25	20.00	0.90	3.300	3.600

Three Track Top Bottom

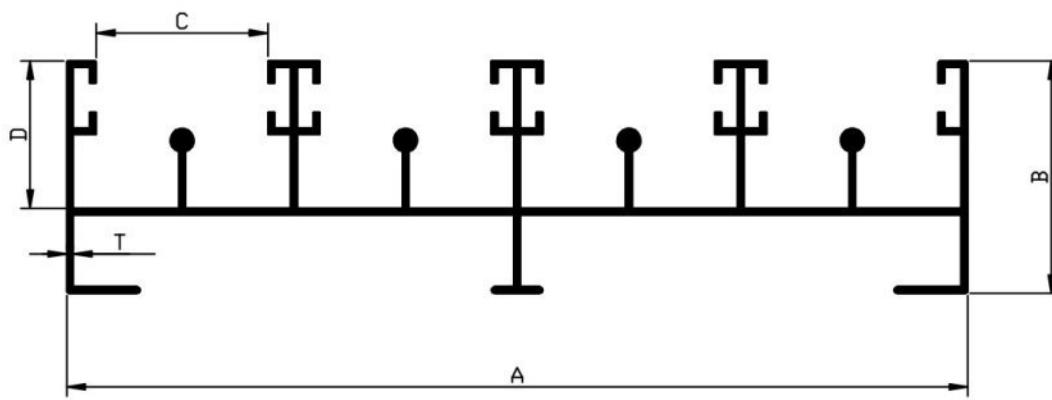


		Sectional Dimension						
Sr. No.	Die No.	A	B	C	D	T	Wt Range Kg/12'	
1	1072	122.00	31.50	23.25	20.00	0.90	3.850	4.200



ARCHITECTURAL

AS - 133


Top - Bottom

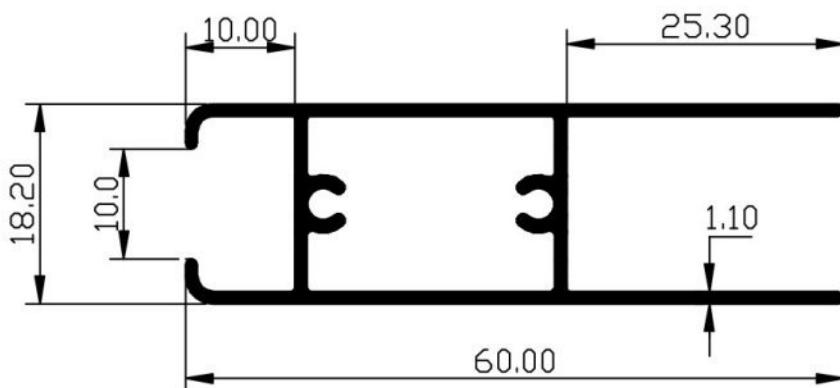

Wt Range Kg/12'
1.890 to

AS - 134

Inter Lock

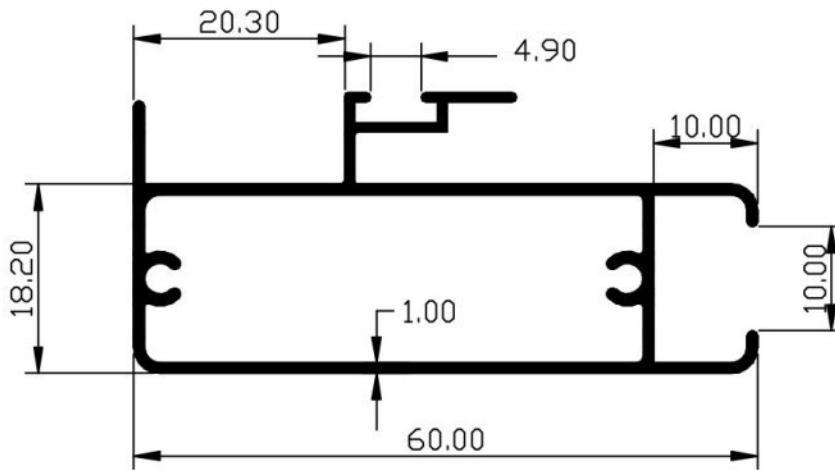


Wt Range Kg/12'
2.100 to



ARCHITECTURAL

AS - 135


Handle

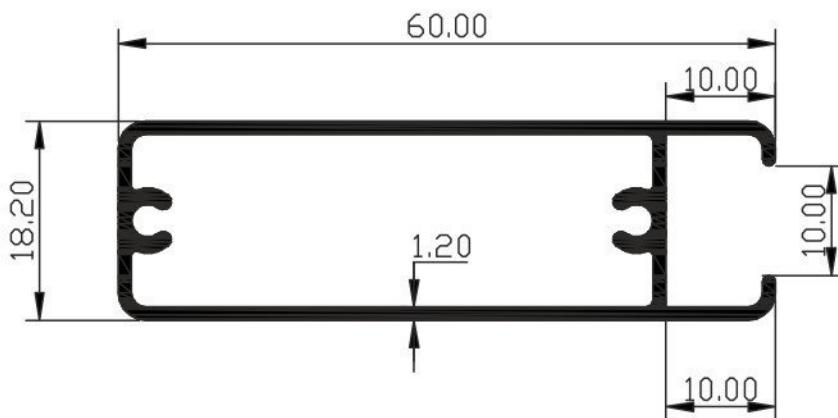

Wt Range Kg/12'
2.050 to

AS - 136

Moulding Handle

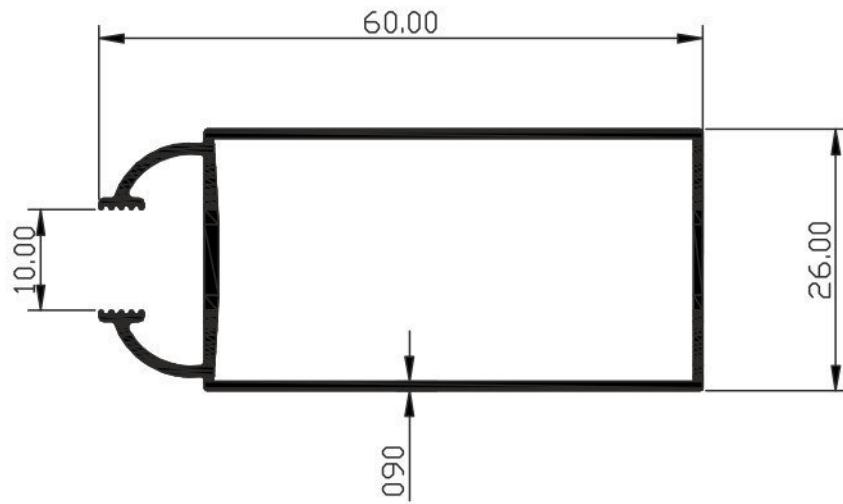


Wt Range Kg/12'
1.700 to



ARCHITECTURAL

AS-141

3/4" Single Led Top-Bottom

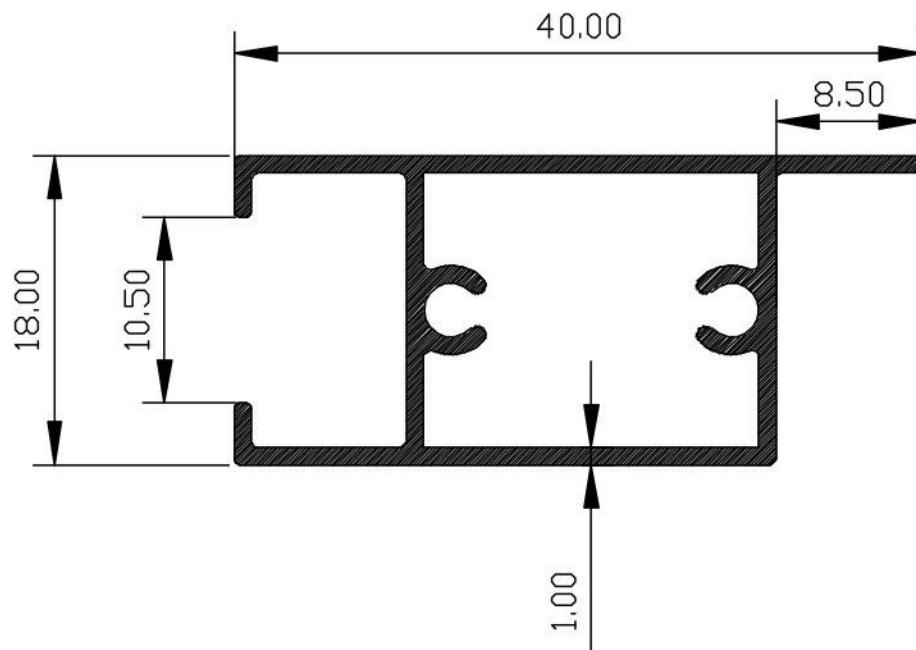


Wt Range Kg/12'
1.400 to



ARCHITECTURAL


1" SERIES

Handle

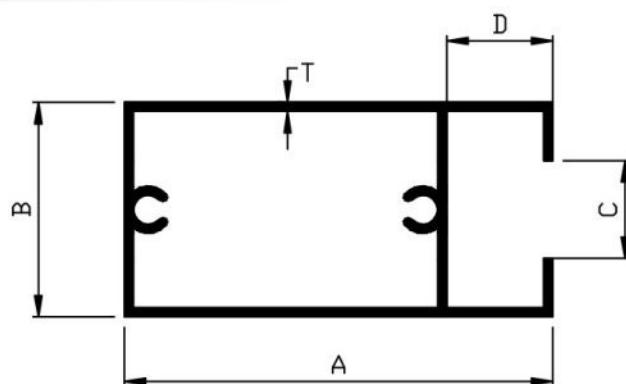

		Sectional Dimension						
Sr. No.	Die No.	A	B	C	D	T	Wt Range Kg/12'	
1	1010	50.00	25.00	10.50	12.40	0.93	1.600	1.800
2	1010/A	50.00	25.00	10.50	12.40	1.05	1.800	2.000

Top Bottom Middle

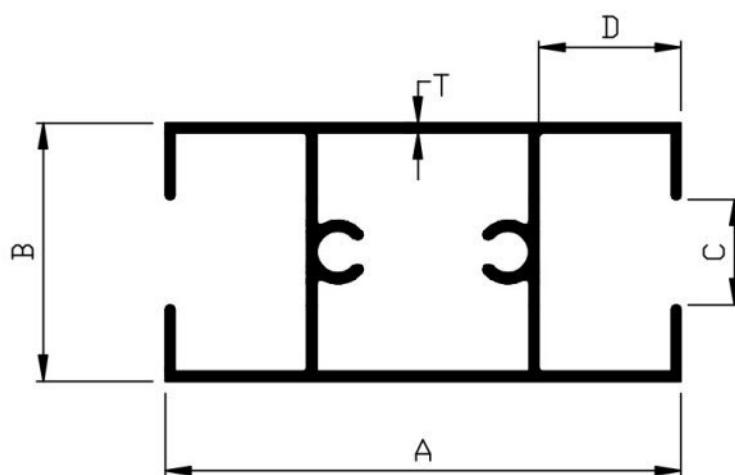


		Sectional Dimension						
Sr. No.	Die No.	A	B	C	D	T	Wt Range Kg/12'	
1	1011	50.00	25.00	10.50	13.75	0.94	1.600	1.800



ARCHITECTURAL

1" SERIES

Top - Bottom

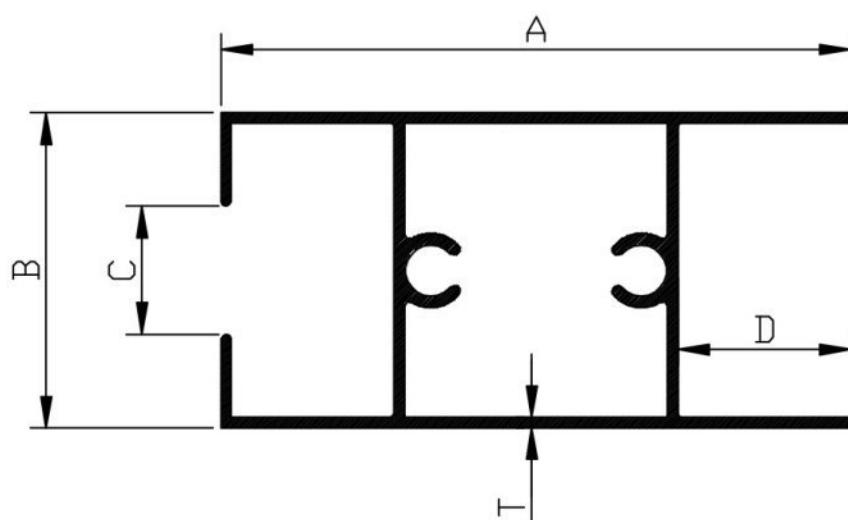


		Sectional Dimension							
Sr. No.	Die No.	A	B	C	D	T	Wt Range Kg/12'		
1	1013	50.00	25.00	10.50	13.75	0.80	1.600	1.800	



ARCHITECTURAL


1" SERIES

Inter Lock

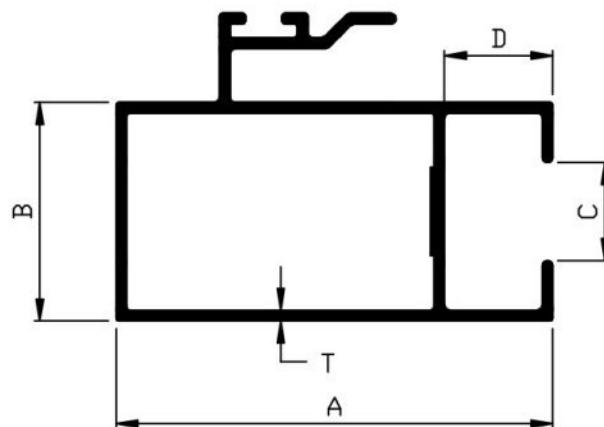


		Sectional Dimension						
Sr. No.	Die No.	A	B	C	D	T	Wt Range Kg/12'	
1	1014	50.00	25.00	10.50	12.40	1.20	2.300	2.400

Top - Bottom Bearing

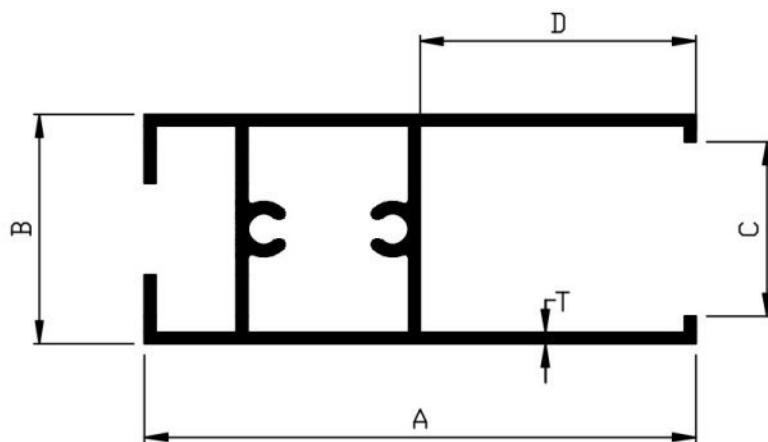


		Sectional Dimension						
Sr. No.	Die No.	A	B	C	D	T	Wt Range Kg/12'	
1	1018	60.00	25.00	19.00	30.00	1.24	2.400	2.600



ARCHITECTURAL

1" SERIES

Single Track Top

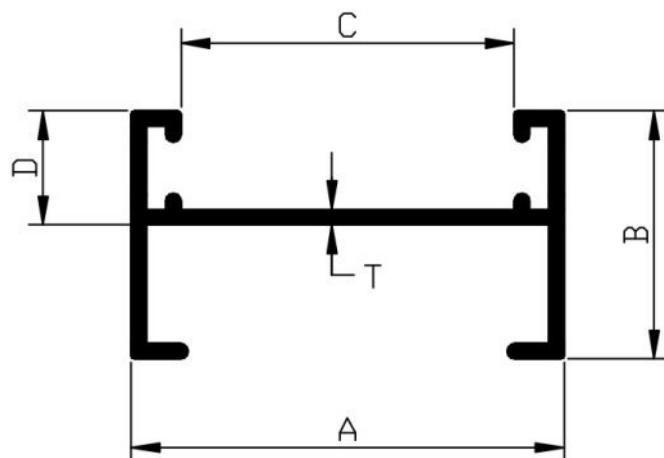


		Sectional Dimension						
Sr. No.	Die No.	A	B	C	D	T	Wt Range Kg/12'	
1	1007	32.00	21.75	29.20	10.00	1.35	1.280	1.480



ARCHITECTURAL


1" SERIES

Two Track Top

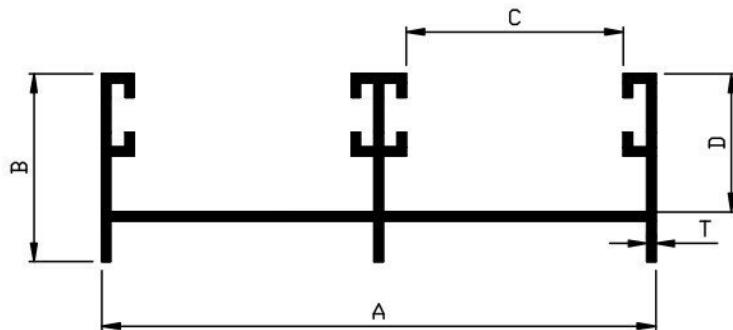

		Sectional Dimension						
Sr. No.	Die No.	A	B	C	D	T	Wt Range Kg/12'	
1	AS-630	75.00	25.40	29.40	18.70	1.20	2.100	2.300

Two Track Top Bottom

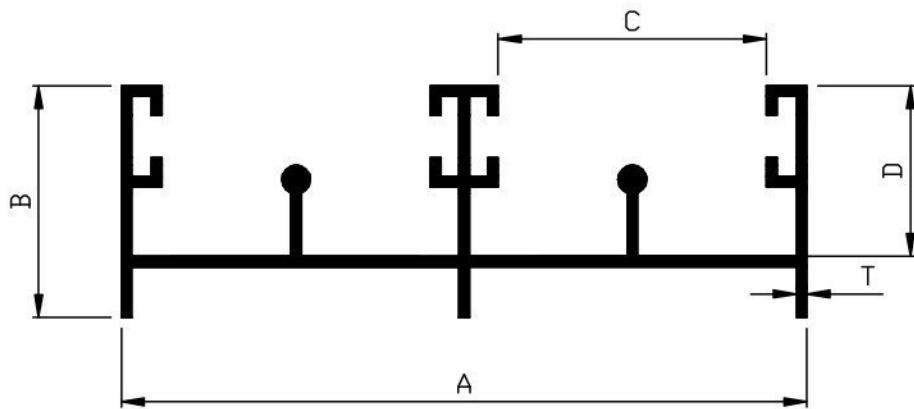


		Sectional Dimension						
Sr. No.	Die No.	A	B	C	D	T	Wt Range Kg/12'	
1	AS-631	75.00	25.40	29.40	18.70	1.13	2.400	2.600



ARCHITECTURAL


1" SERIES

Three Track Top

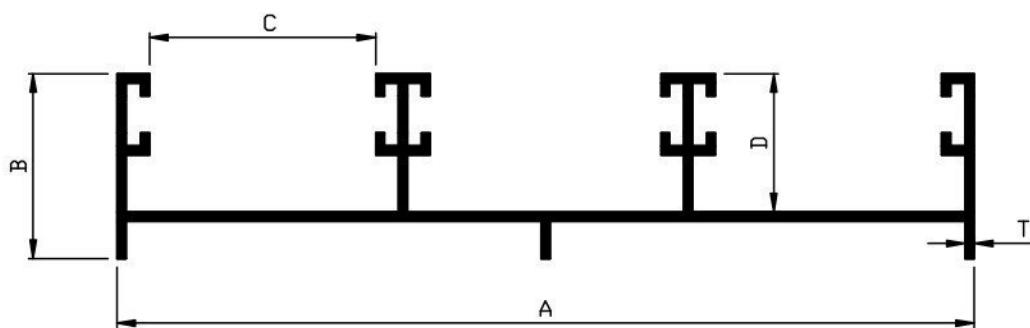

		Sectional Dimension						
Sr. No.	Die No.	A	B	C	D	T	Wt Range Kg/12'	
1	AS-381	116.00	25.00	30.60	18.70	1.20	3.150	3.500

Three Track Top Bottom

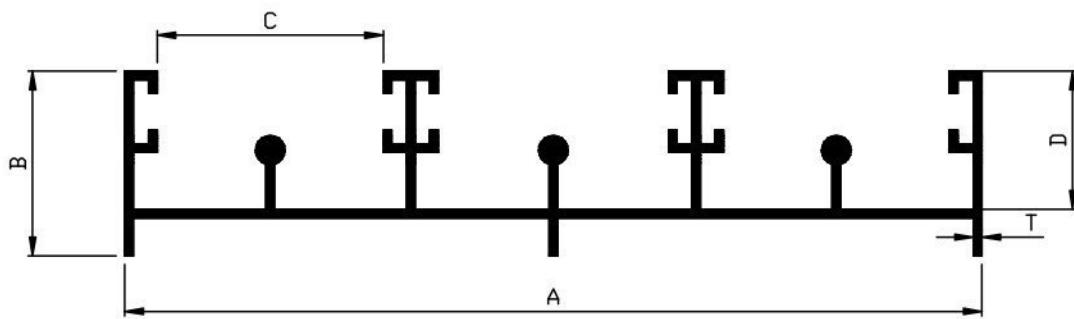


		Sectional Dimension						
Sr. No.	Die No.	A	B	C	D	T	Wt Range Kg/12'	
1	AS-382	116.00	25.00	30.60	18.70	1.12	3.500	3.800



ARCHITECTURAL

AS - 310


**Twin Without Leg
(Half Twin)**

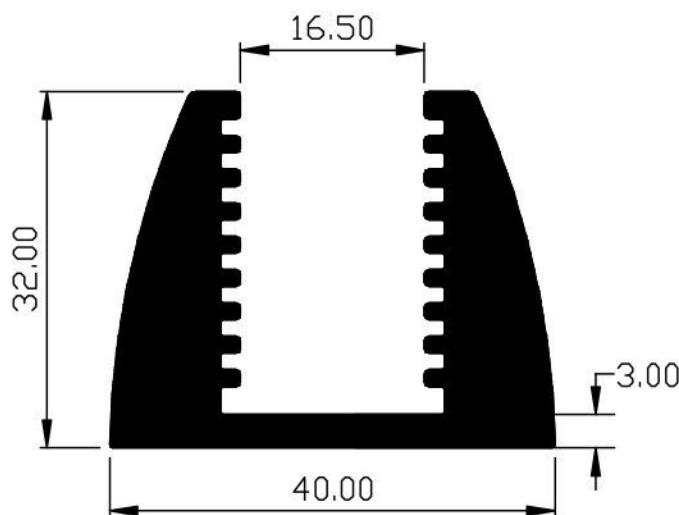

Wt Range Kg/12'
6.000 to 6.600

AS - 311

**Twin Section
(Full Twin)**

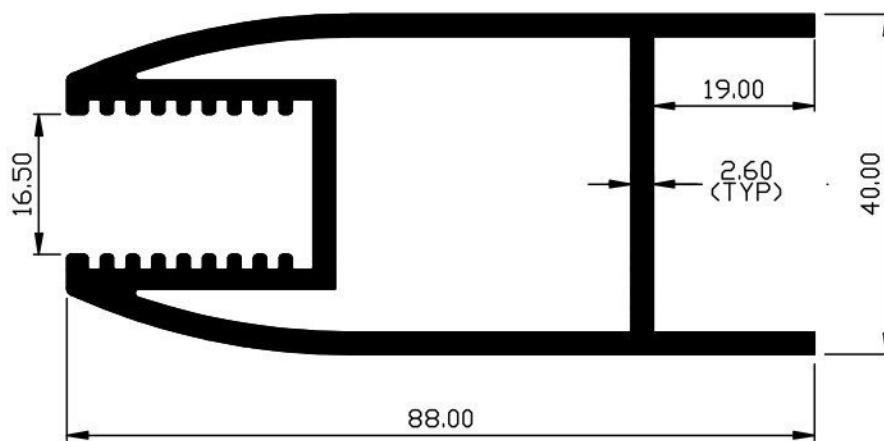


Wt Range Kg/12'
7.800 to 8.300



ARCHITECTURAL

AS-144

Frame

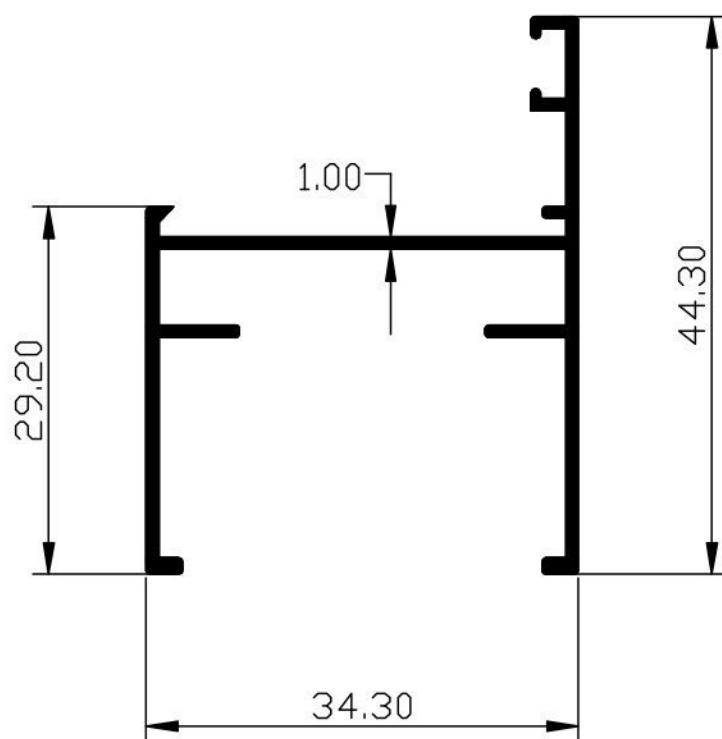


Wt Range Kg/12'
1.320 to 1.520



ARCHITECTURAL

AS-456


Loovers Patta

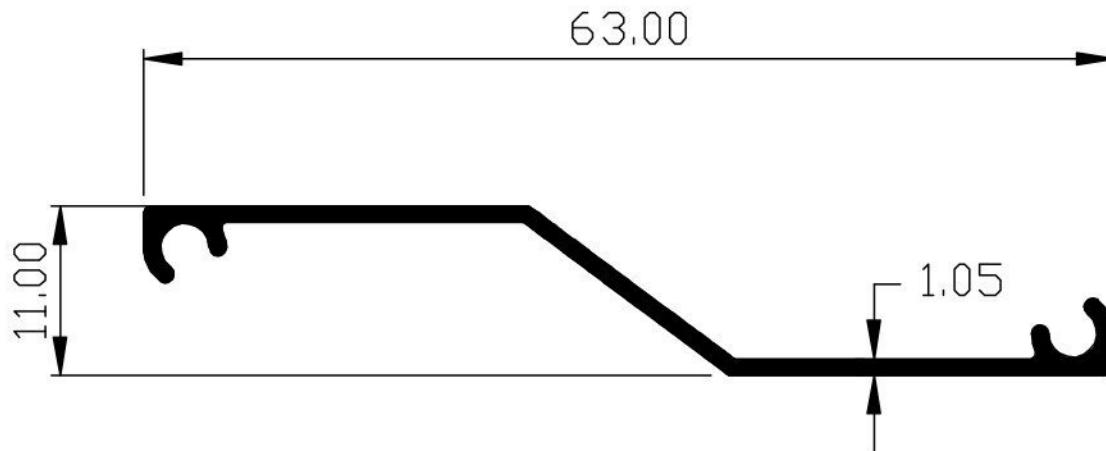

Wt Range Kg/12'
0.840 to

AS-4421

1/2" 2T Bulb

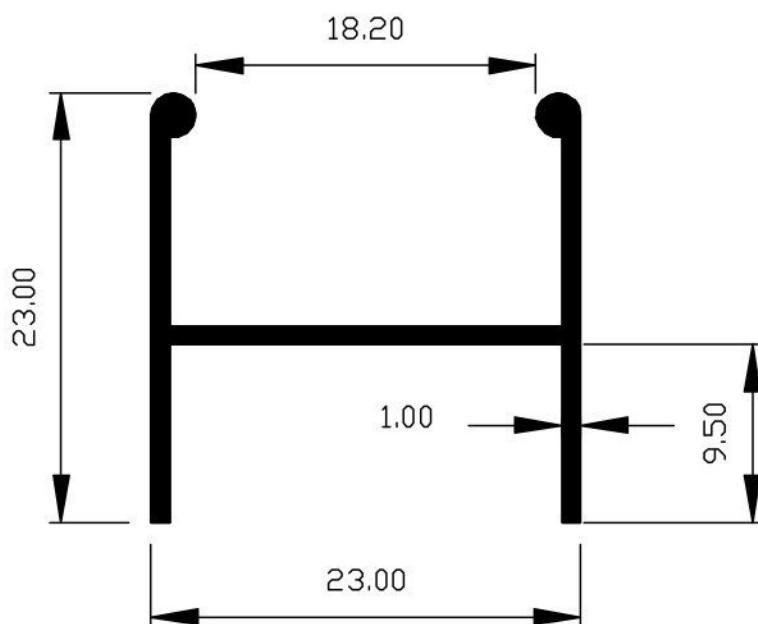


Wt Range Kg/12'
0.650 to



ARCHITECTURAL

AS-457 Loovers Patta

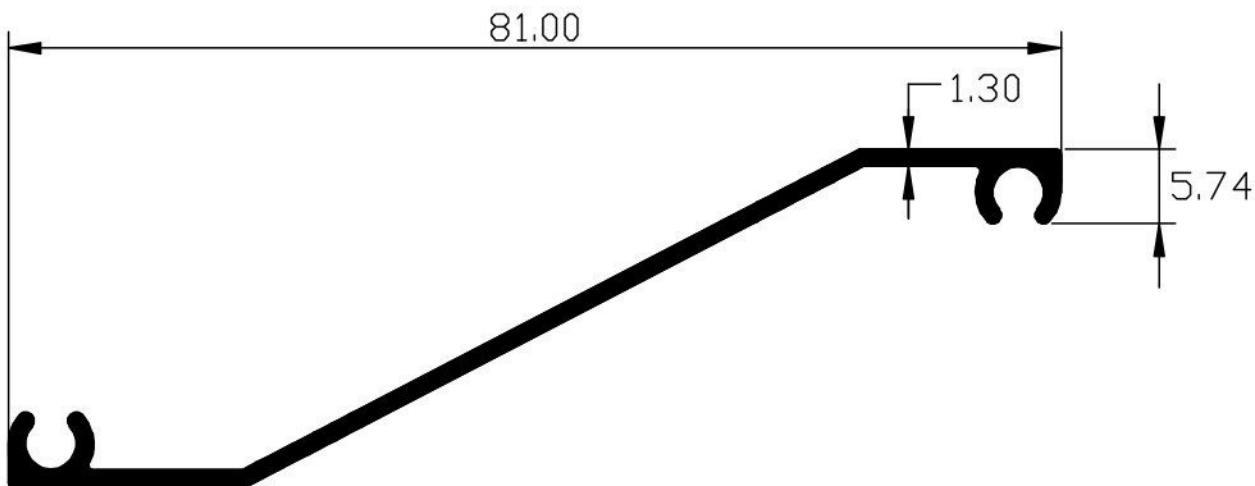


Wt Range Kg/12'
1.400 to 1.600




ARCHITECTURAL

Glazing Clip

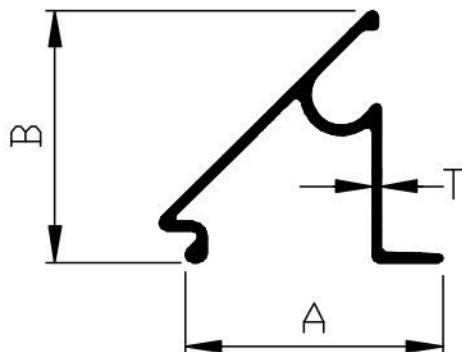

		Sectional Dimension				
Sr. No.	Die No.	A	B	T	Wt Range Kg/12'	
1	AS-10260	17.80	17.40	0.45	0.250	0.280
2	AS-1026	17.80	17.40	0.55	0.280	0.320
3	AS-1026	17.80	17.40	0.65	0.330	0.350
4	AS-1025	17.80	17.40	0.75	0.360	0.400

Glazing Patta

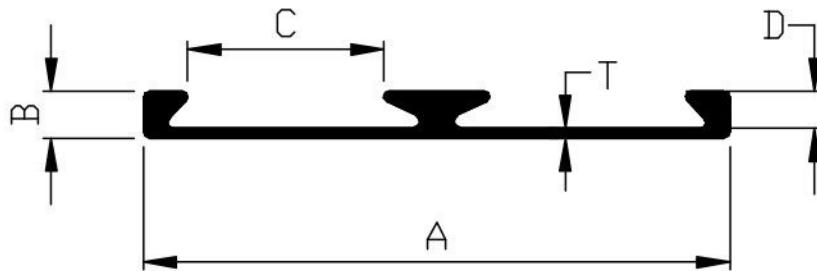


		Sectional Dimension						
Sr. No.	Die No.	A	B	C	D	T	Wt Range Kg/12'	
1	AS-1034	44.45	3.55	14.86	2.80	0.75	0.600	0.800



ARCHITECTURAL

AS-4342


Z-Clip

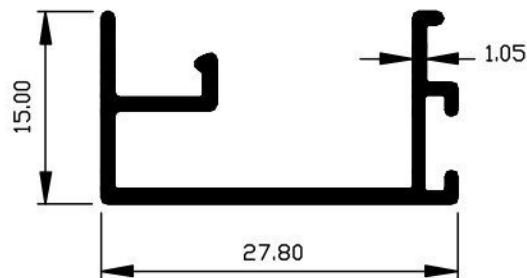

Wt Range Kg/12'
0.770 to 0.870

AS-536


Z-Frame

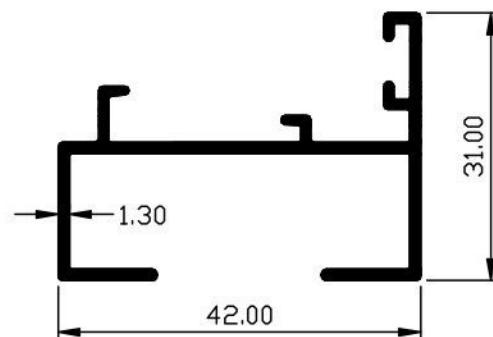

Wt Range Kg/12'
1.600 to 1.800

AS-537


Z-Shutter

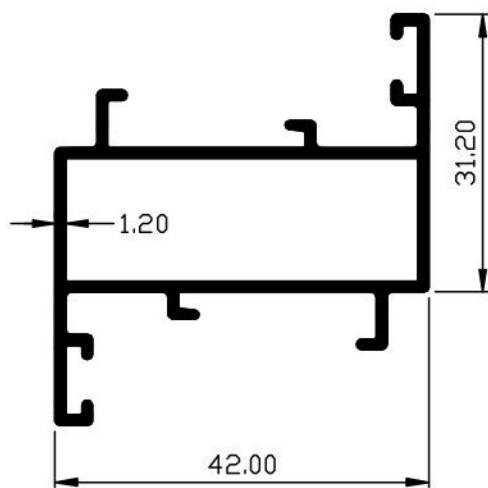

Wt Range Kg/12'
2.000 to 2.400

AS-538

Z-Mullion

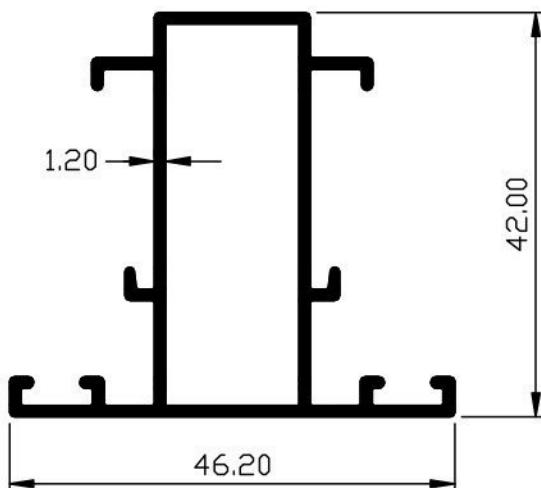


Wt Range Kg/12'
2.190 to 2.390



ARCHITECTURAL

AS - 150


Lip - Channel

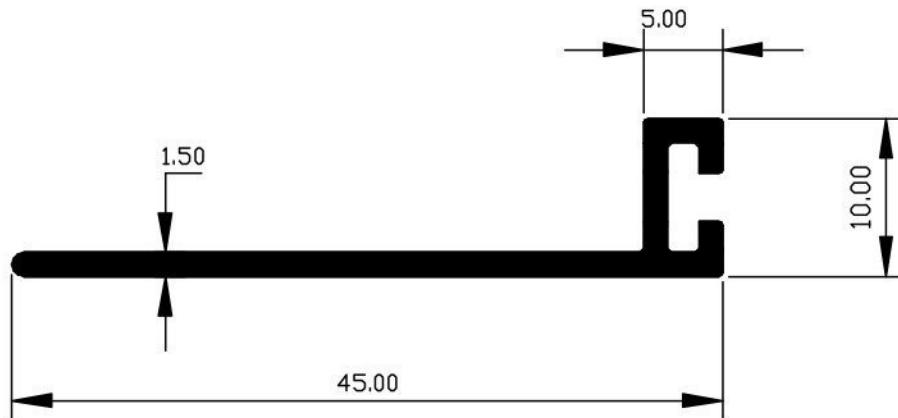


Wt Range Kg/12'
0.900 to 1.100

AS - 151

Lip - Channal

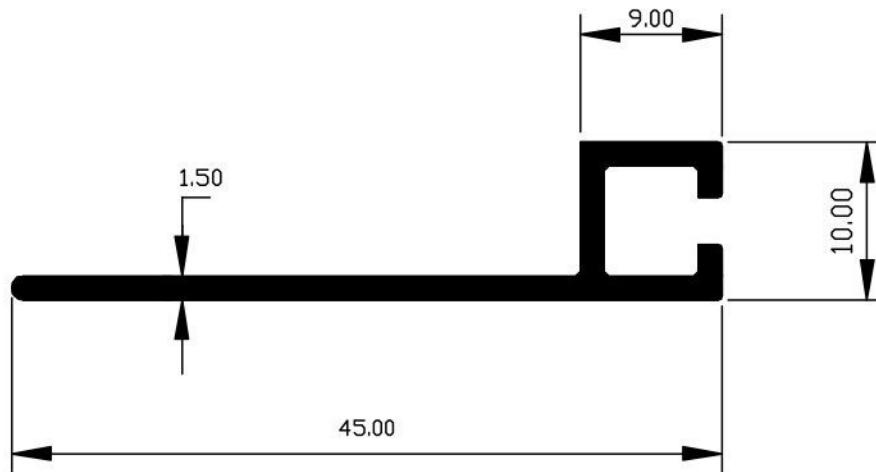


Wt Range Kg/12'
0.975 to 1.175



ARCHITECTURAL


AS-132 F-Channel

Scale : 1:1

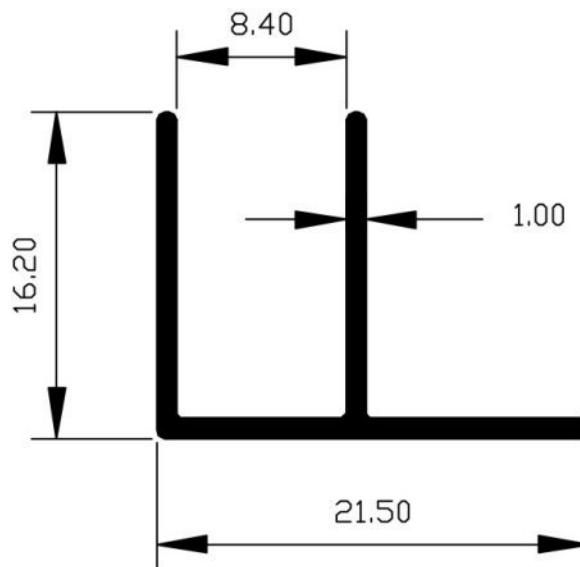

Wt Range Kg/12'
0.500 to 0.550

AS-927 Channel

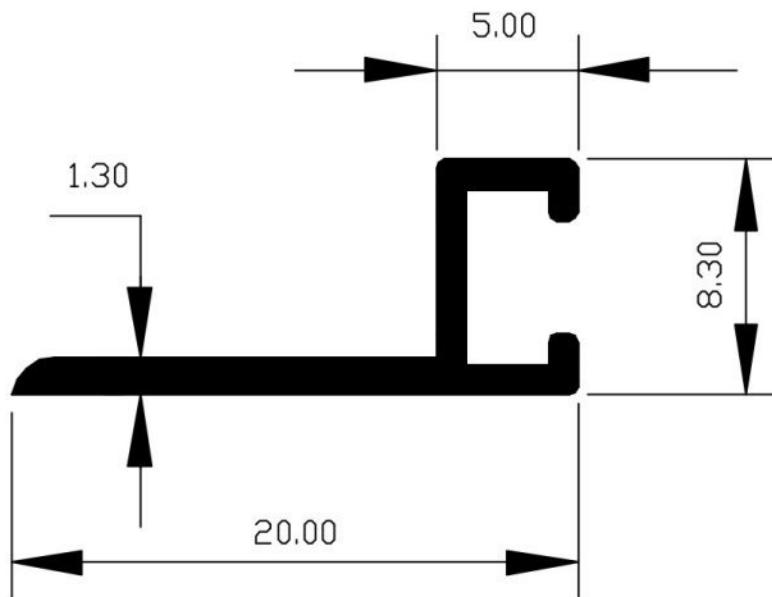


Wt Range Kg/12'
0.375 to




ARCHITECTURAL

Single Partition

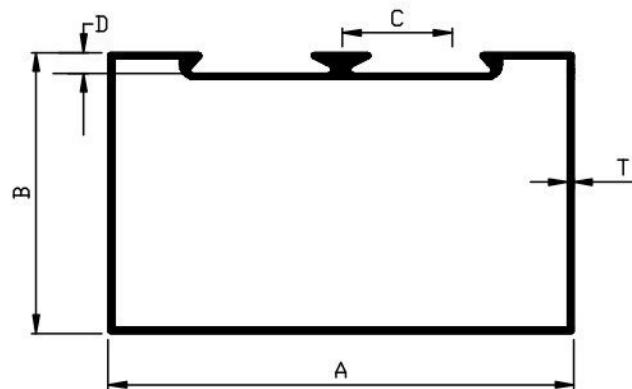

		Sectional Dimension						
Sr. No.	Die No.	A	B	C	D	T	Wt Range Kg/12'	
1	AS-2131	50.00	25.00	14.86	2.80	0.72	1.300	1.500
2	AS-2131	63.00	38.00	14.86	2.80	0.79	1.700	1.900
3	AS-2132	63.00	38.00	14.86	2.80	1.40	3.000	3.200
4	AS-611	101.60	44.45	14.86	2.80	1.27	3.800	4.000

Double Partition

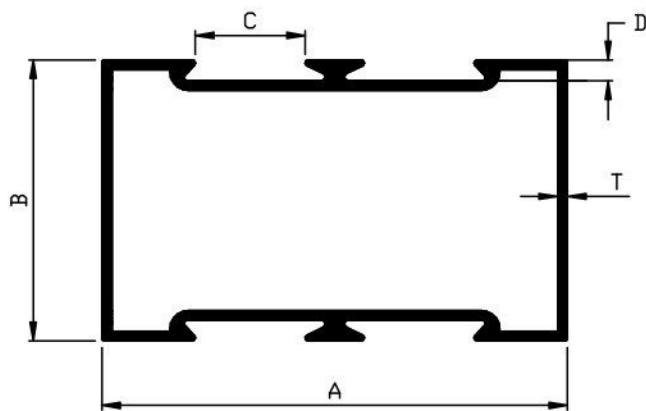


		Sectional Dimension						
Sr. No.	Die No.	A	B	C	D	T	Wt Range Kg/12'	
1	AS-2121	50.00	25.00	14.86	2.80	0.63	1.300	1.500
2	AS-2121	63.00	38.00	14.86	2.80	0.67	1.700	1.900
3	AS-2122	63.00	38.00	14.86	2.80	1.32	3.000	3.200
4	AS-612	101.60	44.45	14.86	2.80	1.20	3.800	4.000



ARCHITECTURAL

Corner Partition

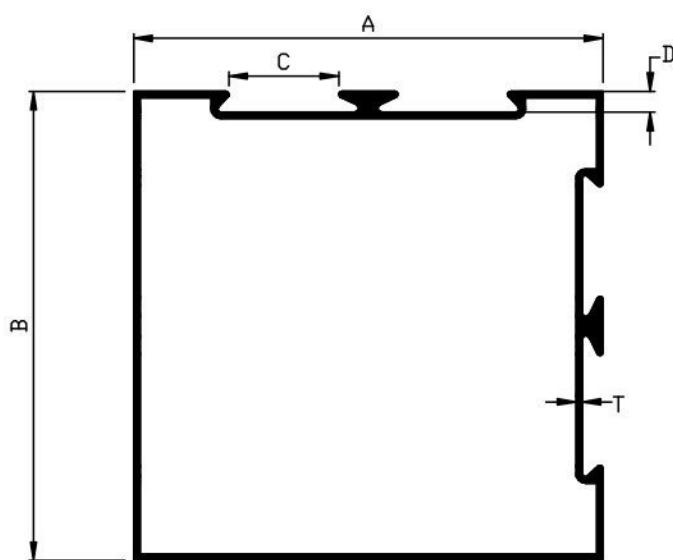


		Sectional Dimension						
Sr. No.	Die No.	A	B	C	D	T	Wt Range Kg/12'	
1	AS-2018	63.50	63.50	14.86	2.80	0.83	2.500	2.700




ARCHITECTURAL

Single Side door Middle

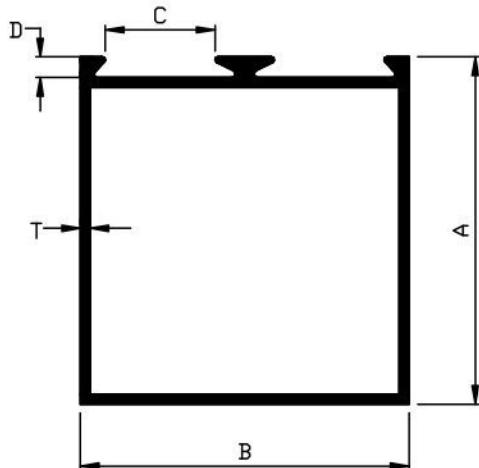

		Sectional Dimension						
Sr. No.	Die No.	A	B	C	D	T	Wt Range Kg/12'	
1	AS-599	47.00	44.45	14.86	2.80	1.32	2.500	2.800
2	AS-600	85.00	44.45	14.86	2.80	1.32	3.800	4.200

Door Vertical

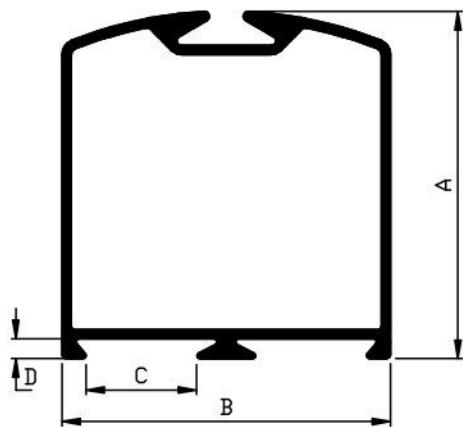


		Sectional Dimension						
Sr. No.	Die No.	A	B	C	D	T	Wt Range Kg/12'	
1	AS-621	47.00	44.45	15.00	2.70	1.22	2.600	2.800
2	AS-601	85.00	44.45	15.00	2.70	1.35	3.800	4.200




ARCHITECTURAL

11/2x1" P-Pipe

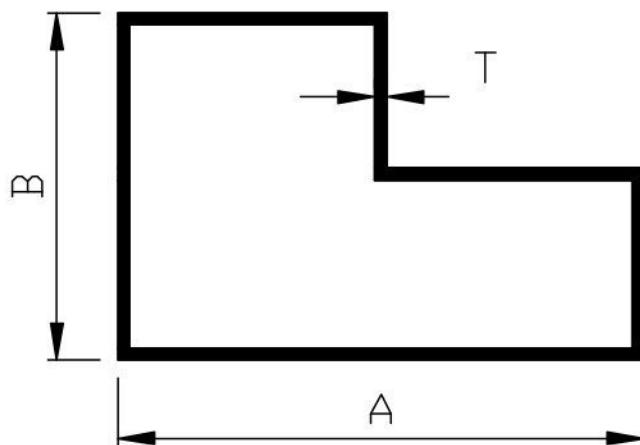

		Sectional Dimension				
Sr. No.	Die No.	A	B	T	Wt Range Kg/12'	
1	AS-515	38.00	25.00	0.80	0.900	1.000
2	AS-5151	38.00	25.00	1.25	1.500	1.700

2X1" P-Pipe

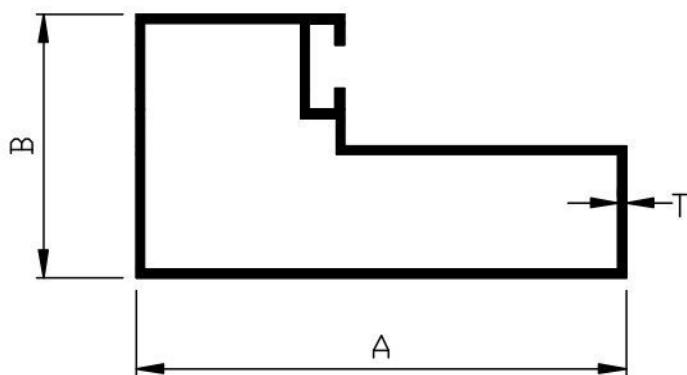


		Sectional Dimension				
Sr. No.	Die No.	A	B	T	Wt Range Kg/12'	
1	AS-579	44.70	24.00	0.75	1.000	1.200




ARCHITECTURAL

21/2x1" P-Pipe

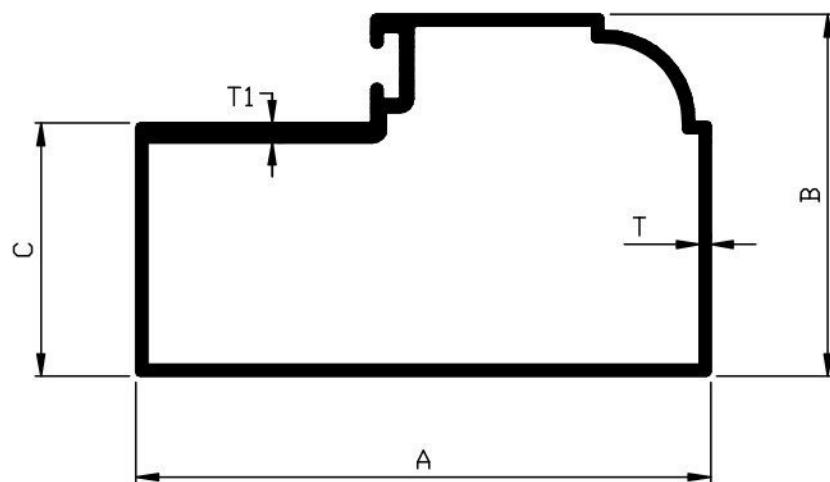

		Sectional Dimension						
Sr. No.	Die No.	A	B	C	T	T1	Wt Range Kg/12'	
1	AS-3211	64.30	40.35	28.35	1.30	2.20	2.900	3.200

Door Frame

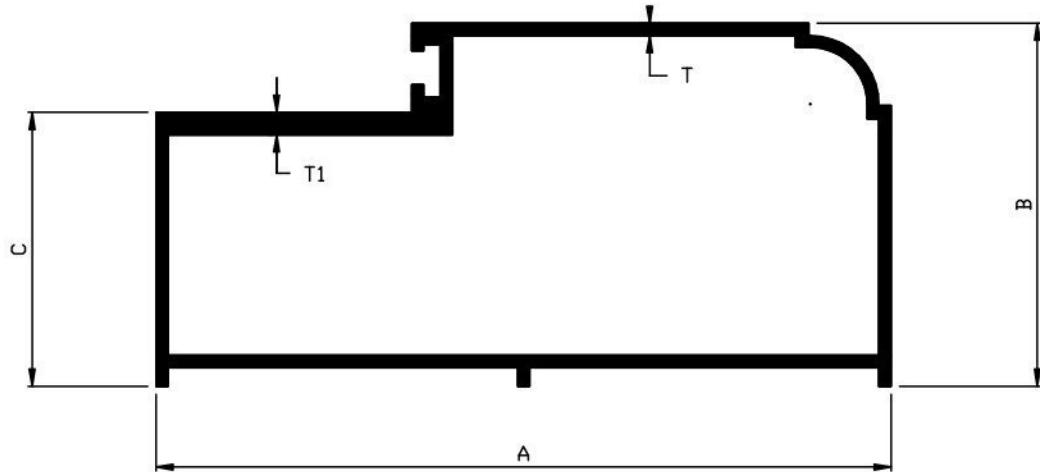


		Sectional Dimension						
Sr. No.	Die No.	A	B	C	T	T1	Wt Range Kg/12'	
1	SP-5	107.30	53.00	40.00	1.80	3.30	6.800	7.200



ARCHITECTURAL

AS - 152


Moulding Section

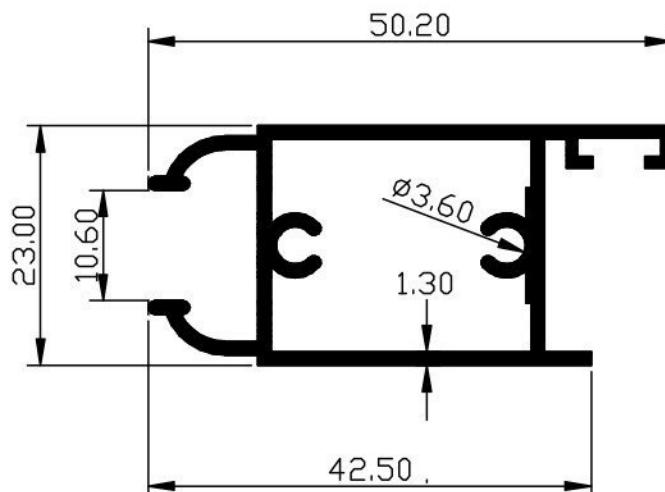

Wt Range Kg/12'
2.220 to 2.420

AS - 153

Door Frame Typ

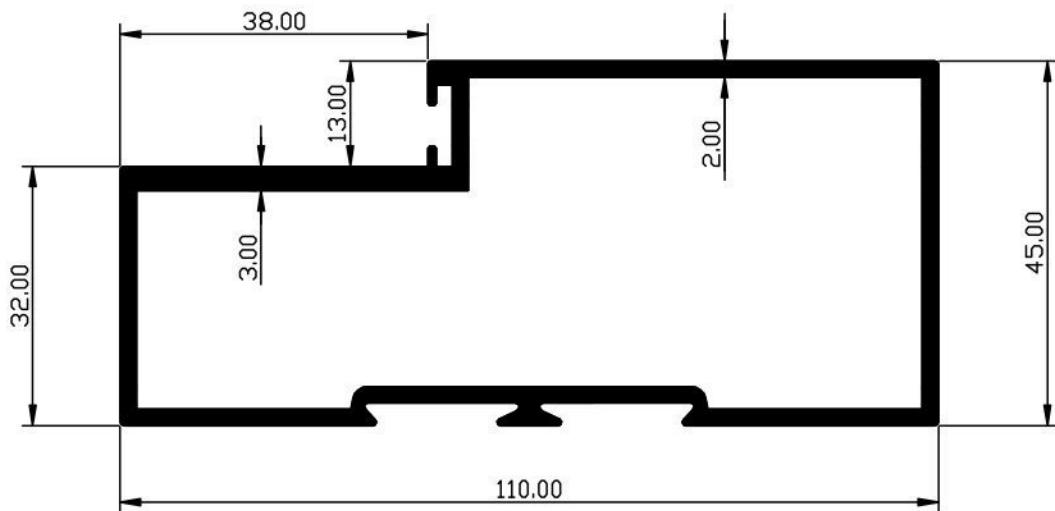


Wt Range Kg/12'
6.500 to 6.700




ARCHITECTURAL

Door Bottom

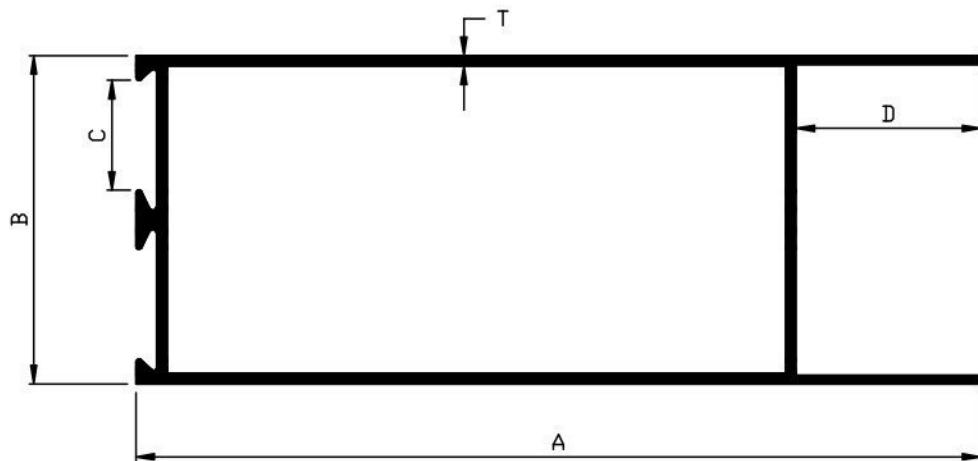

		Sectional Dimension						
Sr. No.	Die No.	A	B	C	D	T	Wt Range Kg/12'	
1	AS-688	114.30	44.45	14.86	25.00	1.40	4.400	4.800

Door Frame

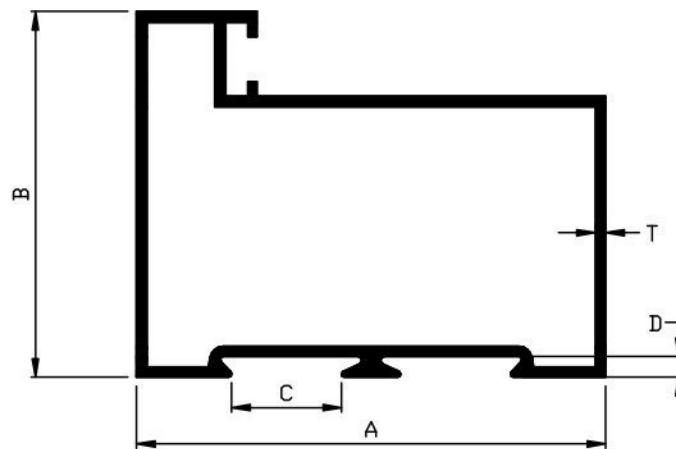


		Sectional Dimension						
Sr. No.	Die No.	A	B	C	D	T	Wt Range Kg/12'	
1	AS-676	63.50	49.50	14.86	2.80	1.40	3.400	3.750




ARCHITECTURAL

Samosa Section

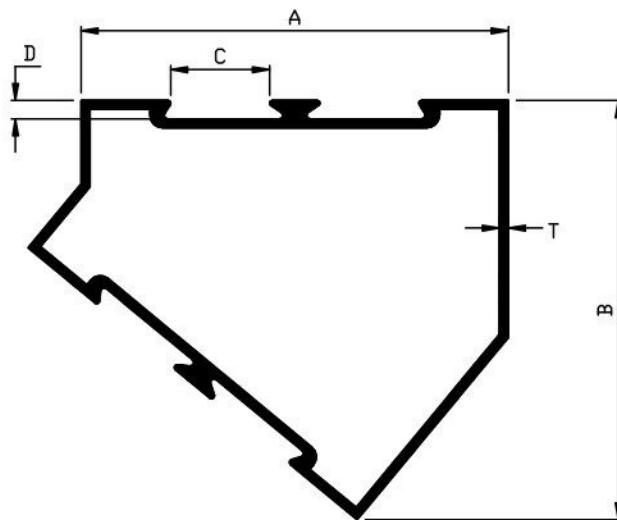

		Sectional Dimension						
Sr. No.	Die No.	A	B	C	D	T	Wt Range Kg/12'	
1	AS-788	62.85	61.75	14.54	2.70	1.30	3.300	3.500

Leg Vertical

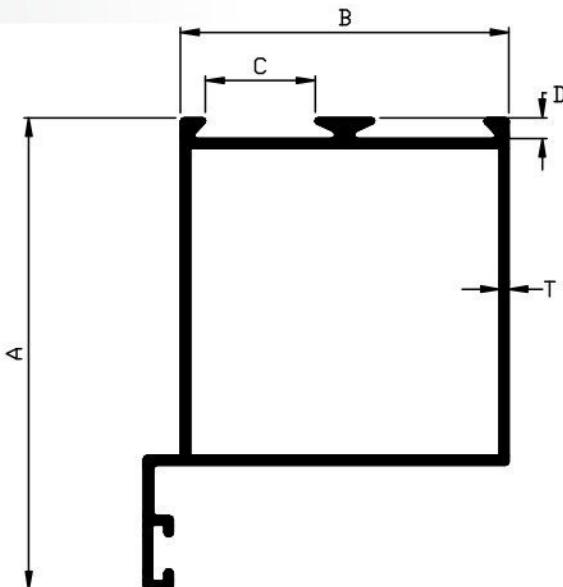


		Sectional Dimension						
Sr. No.	Die No.	A	B	C	D	T	Wt Range Kg/12'	
1	AS-1002	64.20	44.45	14.86	2.80	1.32	2.900	3.100



ARCHITECTURAL

Curtain Wall Section

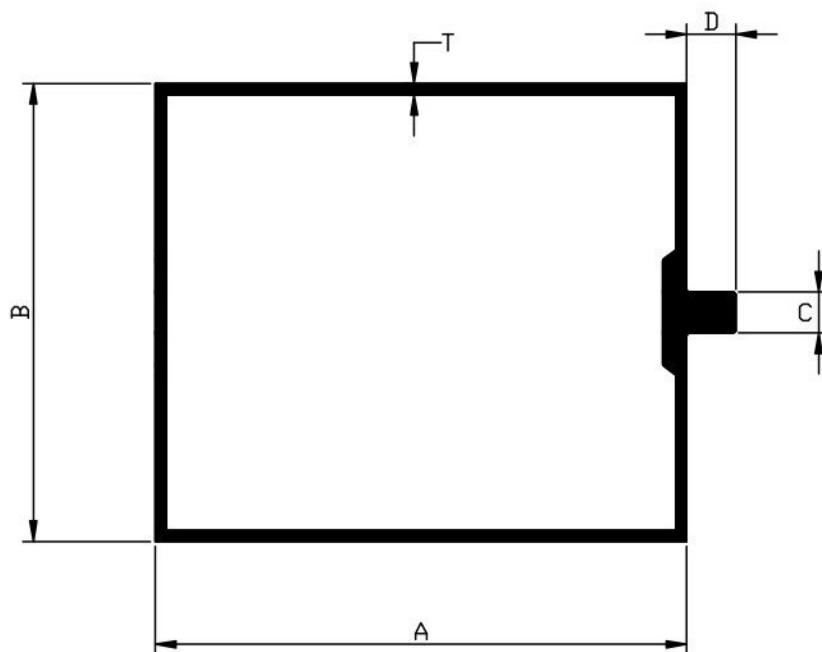


		Sectional Dimension						
Sr. No.	Die No.	A	B	C	D	T	Wt Range Kg/12'	
1	AS-137	50.00	50.00	5.00	6.00	1.20	2.800	3.00
2	AS-138	80.00	50.00	5.00	6.00	1.27	3.760	4.00
3	AS-139	80.00	50.00	5.00	6.00	1.95	5.450	5.700
4	AS-140	65.00	56.00	5.00	6.00	1.35	3.760	4.00
5	SP-63	64.00	58.00	5.00	6.00	2.00	5.150	5.350



ARCHITECTURAL

AS-900


Sadi Curtain Channel

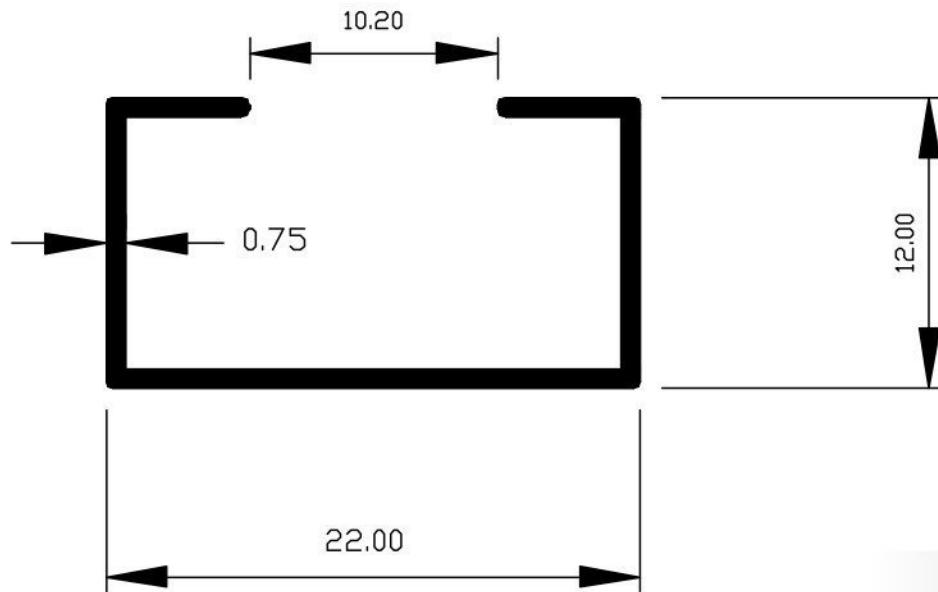

Wt Range Kg/12'
0.400 to 0.450

AS-925

LIP Curtain Channel

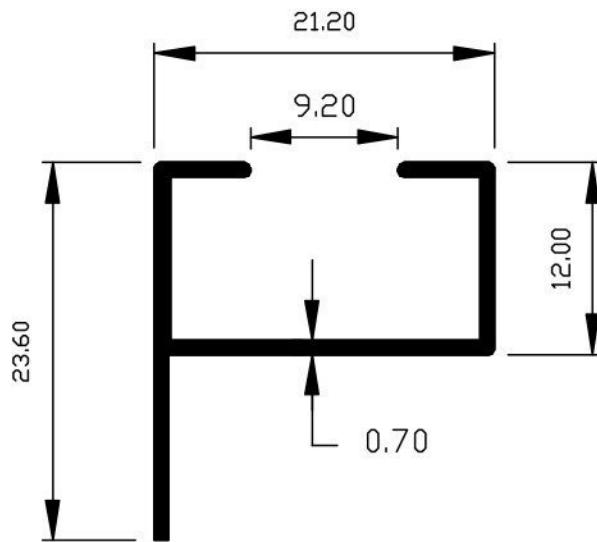


Wt Range Kg/12'
0.450 to 0.500



ARCHITECTURAL

AS-530


Door Gear Channel

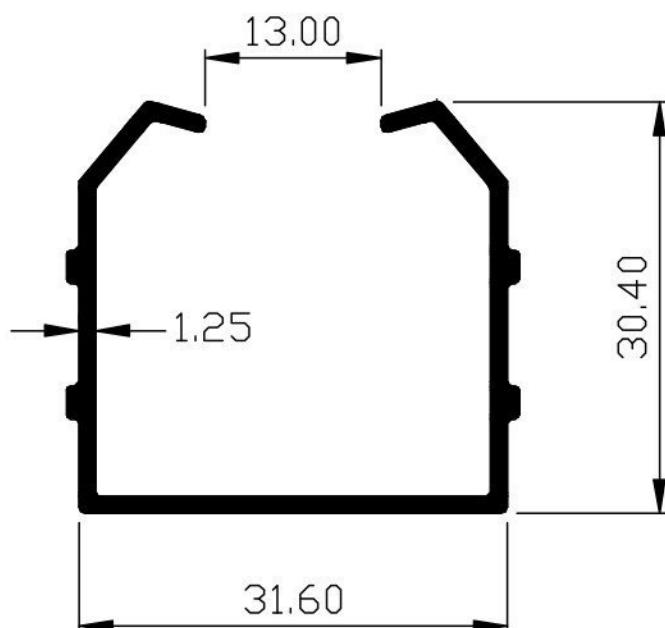

Wt Range Kg/12'
1.200 to

SP-1123

G-Channel

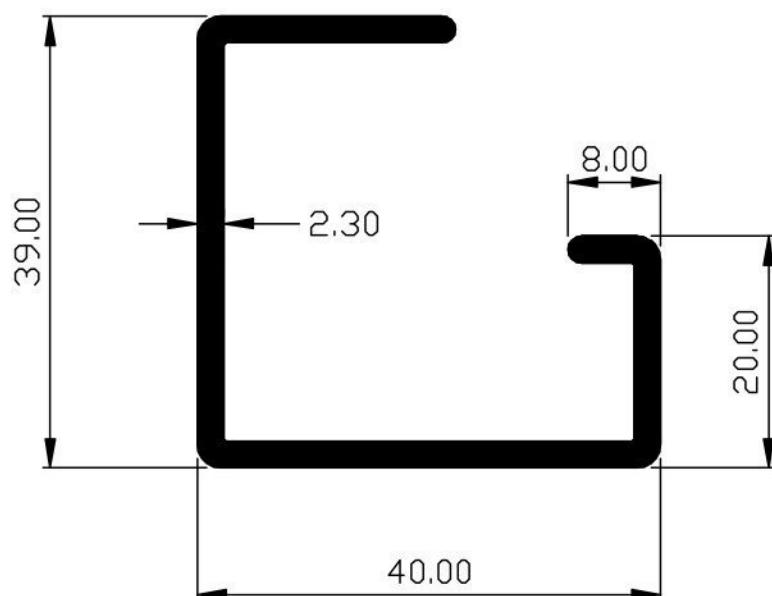


Wt Range Kg/12'
2.700 to



ARCHITECTURAL

AS - 154


Special

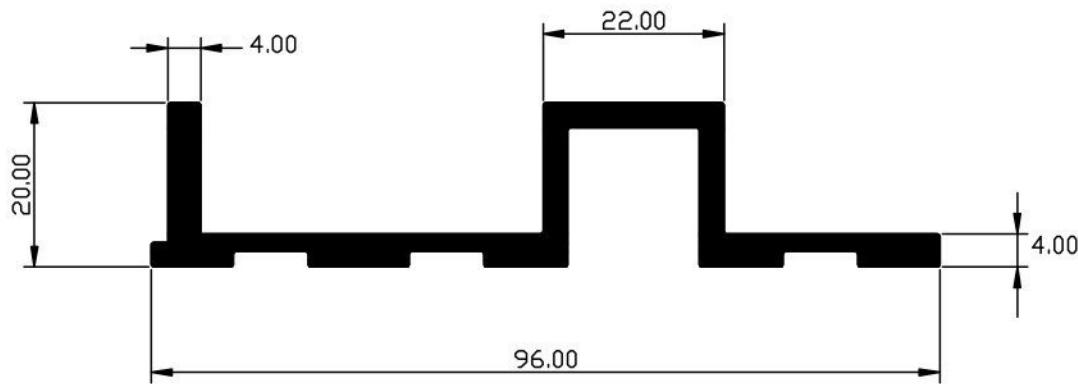

Wt Range Kg/12'
4.800 to 5.000

AS - 155

Special

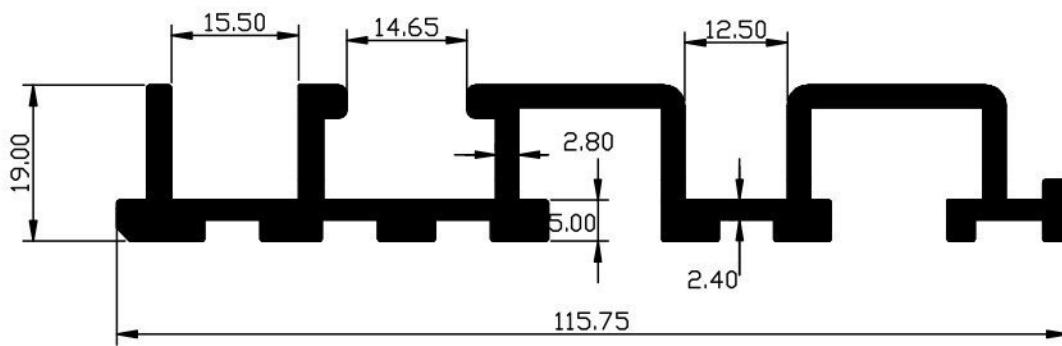


Wt Range Kg/12'
7.180 to 7.380



ARCHITECTURAL

AS-149

Special

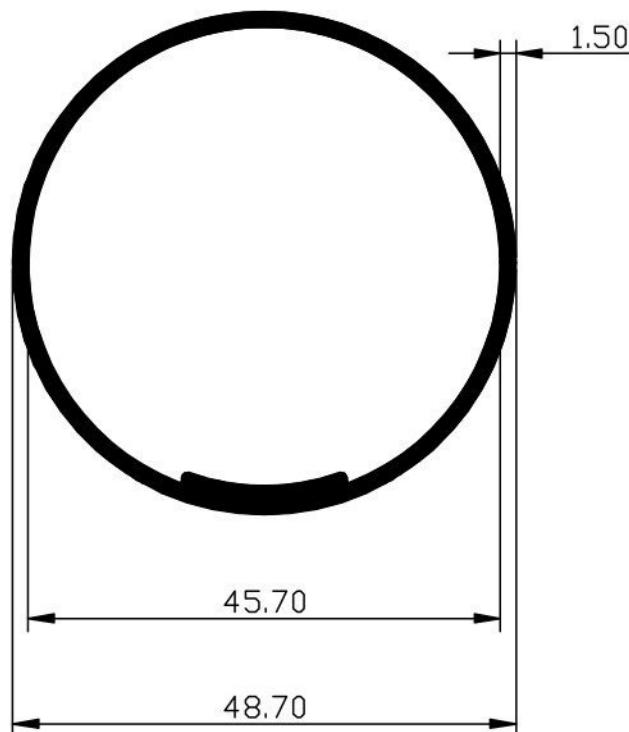


Wt Range Kg/12'
2.400 to 2.550



ARCHITECTURAL

AS- 146 RCT

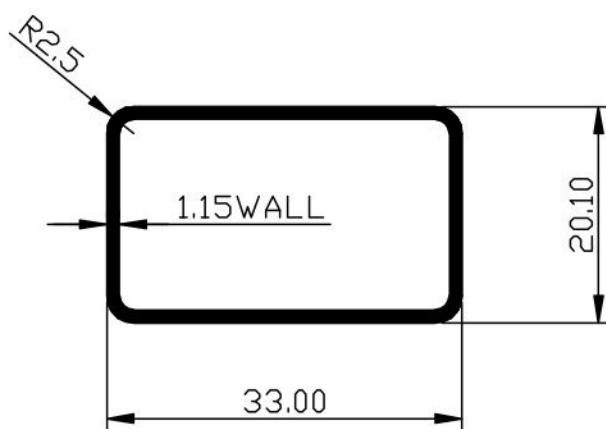


Wt Range Kg/12'
1.150 to 1.350



DOMAL SECTION

AS - 207


2. T. Hollow

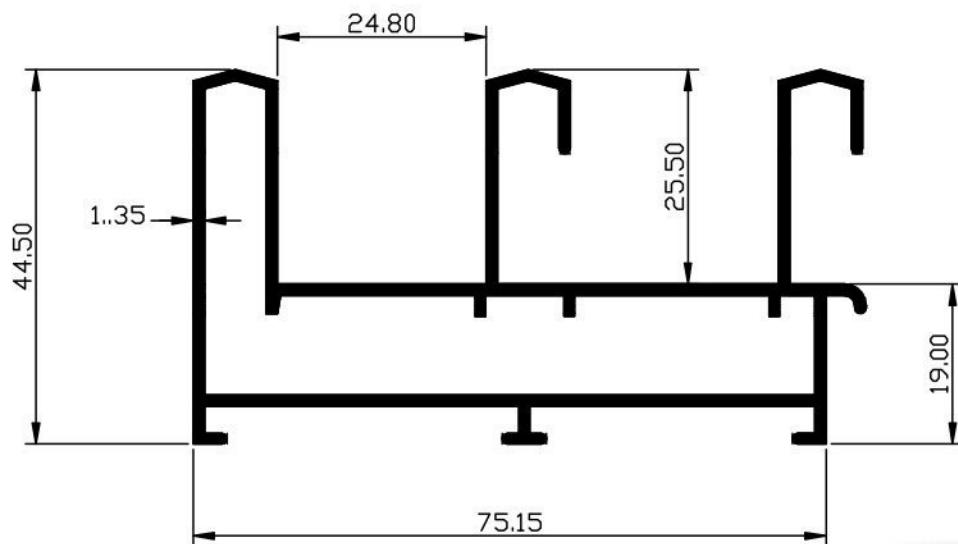

Wt Range Kg/12'
4.575 to 4.800

AS - 208

Shutter

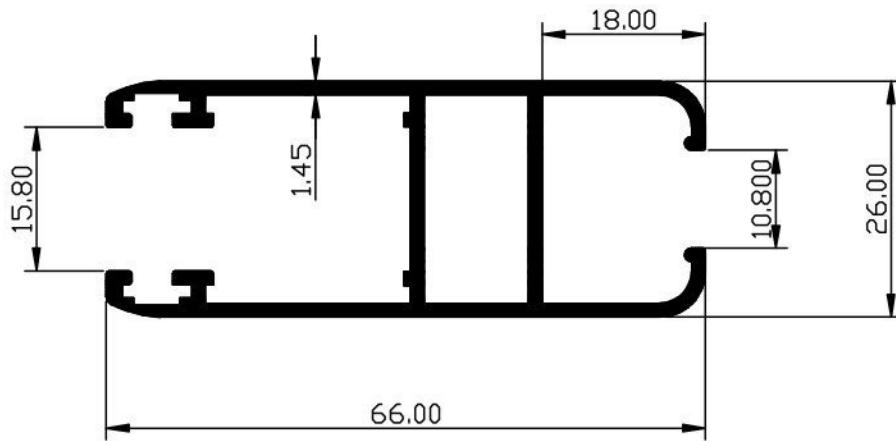


Wt Range Kg/12'
3.000 to 3.200



DOMAL SECTION

AS - 156


Single Track

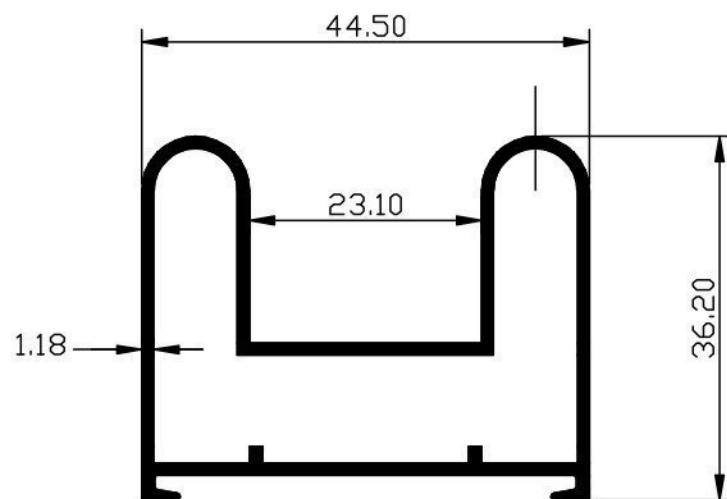

Wt Range Kg/12'
2.350 to 2.550

AS - 157



Double Track

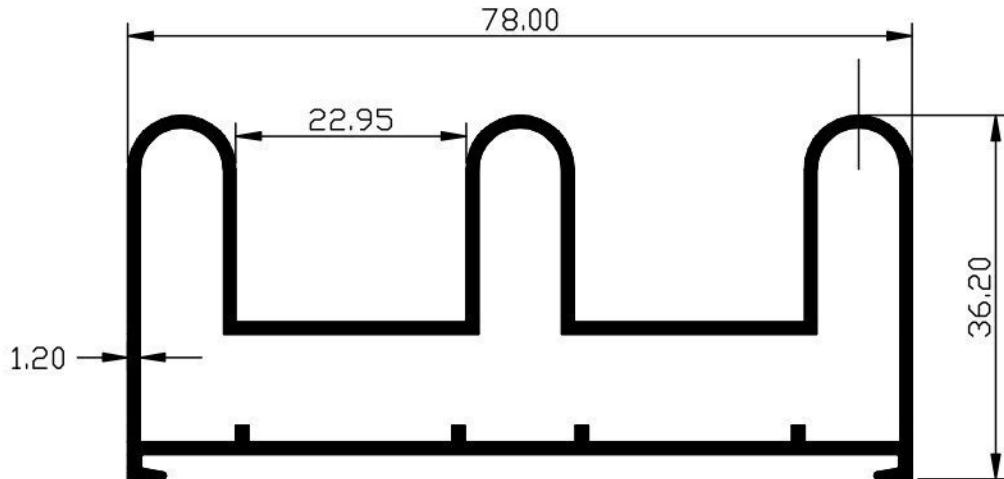


Wt Range Kg/12'
3.650 to 3.850



DOMAL SECTION

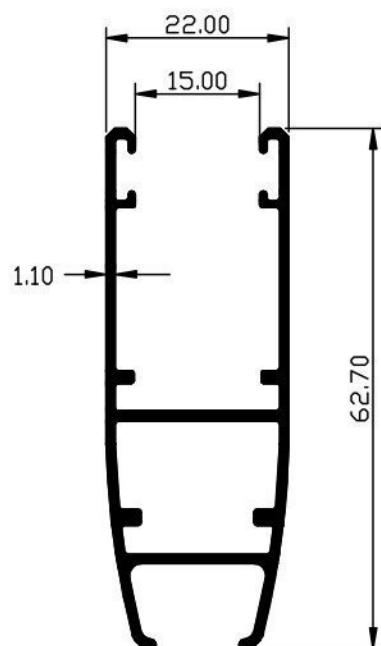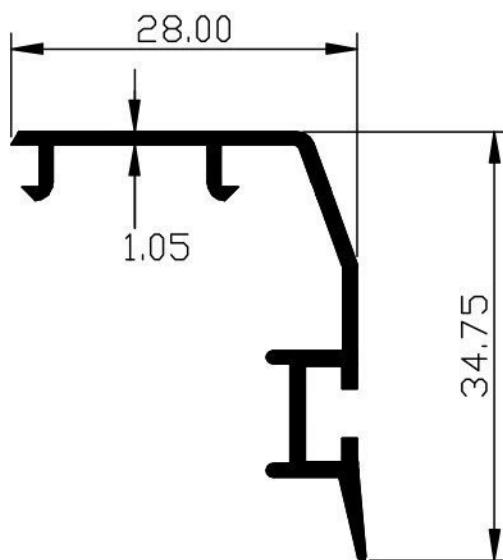
AS - 158**I / L****Wt Range Kg/12'**
2.150 to 2.350**AS - 159****Clip****Wt Range Kg/12'**
0.950 to 1.150



DOMAL SECTION

AS-201


Two Track

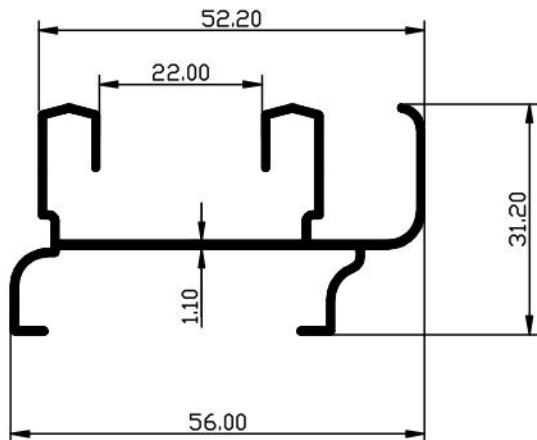


Wt Range Kg/12'
1.700 to 1.900

AS-202

Three Track

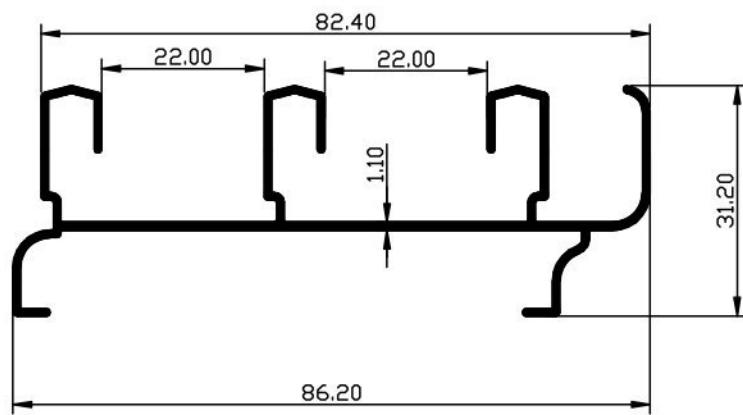


Wt Range Kg/12'
2.400 to 2.600




DOMAL SECTION

AS - 204 Shutter

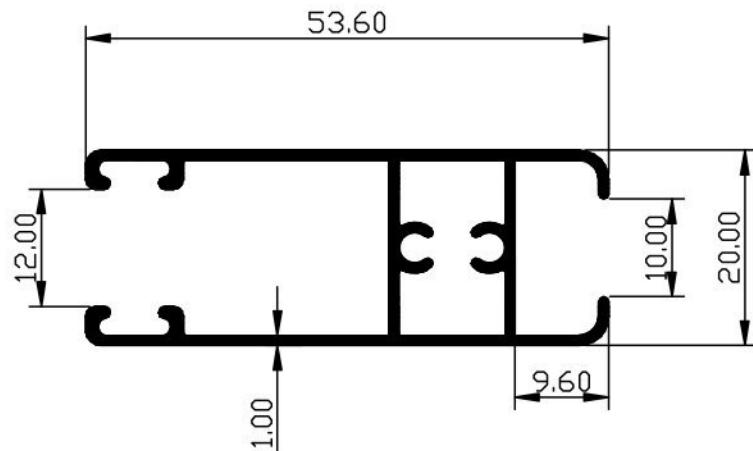

Wt Range Kg/12'
1.730 to 1.930

AS - 206 Clip

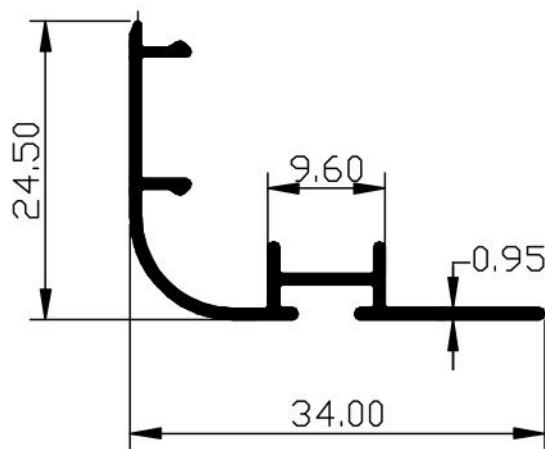

Wt Range Kg/12'
0.670 to 0.970