



**INNOVATION
AID SDN BHD**



Prepared By :
INNO AID

Method of Statement
TORCH ON MEMBRANE



www.innoaid.co



018-6611182



info@innoaid.co

COMPANY INTRODUCTION















APPLICATOR's CERTIFICATES & REGISTRATION



SURUHANJAYA SYARIKAT MALAYSIA
COMPANIES COMMISSION OF MALAYSIA
(Agensi di bawah KPDNHEP)



COMPANIES ACT 2016
(ACT 777)

**CERTIFICATE OF INCORPORATION
OF PRIVATE COMPANY**

This is to certify that

INNOVATION AID SDN. BHD.
202201032439 (1478136-P)

is, on and from the 01st day of September 2022, incorporated under the
Companies Act 2016, and that the company is a company limited by shares and
that the company is a private company.

Dated at **KUALA LUMPUR** this 01st day of September 2022.



DATUK NOR AZIMAH ABDUL AZIZ
REGISTRAR OF COMPANIES
MALAYSIA



CERTIFICATES & REGISTRATION

Activate Windows



PERAKUAN PENDAFTARAN

Adalah dengan ini diperakui bahawa kontraktor yang dinyatakan di bawah ini telah berdaftar dengan Lembaga mengikut Bahagian VI Akta Lembaga Pembangunan Industri Pembinaan Malaysia 1994. Pendaftaran ini adalah tertakluk kepada syarat-syarat yang telah ditetapkan bersama perakuan ini.

No. Pendaftaran : 0120241113-SL146229
Nama Kontraktor : INNOVATION AID SDN. BHD.
Alamat Berdaftar : B-5-09, CAPITAL 2, OASIS SQUARE NO. 2, JALAN PJU 1A/7A, OASIS DAMANSARA 47301 PETALING JAYA
Daerah : PETALING
Tarikh Mula Berdaftar : 13/11/2024

<u>GRED</u>	<u>KATEGORI</u>	<u>PENGKHUSUSAN</u>
G5	B	B04
G5	CE	CE21
G5	ME	M15

Tarikh Mula Berkuatkuasa : 13/11/2024
Tarikh Habis Tempoh Perakuan : 12/11/2026
STATUS: BARU

Ketua Eksekutif
Lembaga Pembangunan Industri Pembinaan Malaysia
Tarikh: 13/11/2024



CERTIFICATES & REGISTRATION



Activate Windows

Our Ref: L/AQ/IA/01062025/0001

Innovation AID Sdn Bhd
L2-03, Lavile 5, Lorong Peel,
Maluri, 55100 Kuala Lumpur

01 June 2025

Dear Sir/Madam

ARDEX QUICSEAL APPLICATOR

We acknowledge Innovation AID Sdn Bhd is qualified applicator to handle ARDEX QUICSEAL products. This certification is valid till 31 May 2026 and renewable on a bi-annual basis based on the quality of work.

Please do not hesitate to contact us should you require more information.

Thank you.

Yours sincerely,

A handwritten signature in black ink, appearing to read 'Kan'.

Kan Chee Kin

Senior Business Development Manager

016-3199622

ARDEX QUICSEAL MALAYSIA SDN. BHD 200101003157 (638913-T)
(Formerly known as Quic-Seal Construction Chemicals Sdn. Bhd.)
Office: No. 72-2 Jalan Puteri 2/2 Bandar Puteri, 47100 Puchong, Selangor Darul Ehsan. Tel+03 8051 0311
Plant: No 15 Jalan Desa Tropika 2/2, Taman Perindustrian Tropika, 81800 Ulu Tiram, Johor. Tel +07 8620833, +07 8620633 Fax +07 8620793
Website www.ardex-quicseal.com



CERTIFICATES & REGISTRATION



CLP CONSTRUCTION SYSTEMS SDN. BHD. (383025-K)

Date : 10 July 2025

TO WHOM IT MAY CONCERN

RE : LETTER OF APPOINTMENT

We understand that Innovation AID Sdn Bhd of L2-03 Lavile 5, Lorong Peel, 55100 Maluri Kuala Lumpur, Wilayah Persekutuan is engaged in waterproofing works and has committed itself to a high standard of quality work, product understanding and application.

Innovation AID Sdn Bhd has further committed to a complete and thorough understanding of the full range of CLP Construction Systems Sdn Bhd's construction chemical products and its application methods in accordance with the recommendation, manuals and other instructions issued by CLP Construction Systems Sdn Bhd.

Accordingly, Innovation AID Sdn Bhd is hereby appointed as Authorised Applicator of CLP Construction Systems Sdn Bhd and to whom CLP Construction Systems Sdn Bhd shall furnish her product warranties in accordance with its specifications as well as extend any reasonable technical and supply support as may required for Innovation AID Sdn Bhd to fulfill her obligations to any projects Innovation AID Sdn Bhd so chooses to enter into.

Notwithstanding the above, Innovation AID Sdn Bhd shall determine the suitability of the selected CLP manufactured construction chemicals product for the required application and shall assume the responsibility of quality work and site management.

Yours faithfully,

Stella Ngoc
Executive Director.



□ Port Kelang Office : Lot 9, Jalan Sultan Mohamed 4, Sebat Kelang Utara, 42000 Selangor. Tel : 03-3176 5099 (Hunting Line) Fax : 03-3176 2797
□ Pasir Gudang Office : Plo 467, Jalan Ketuli, Kawasan Perindustrian Pasir Gudang, 81700 Johor. Tel : 07-252 5385 Fax : 07-252 5391
□ Merlimau Office : Lot 3G, Kawasan Perindustrian Merlimau, 77300 Merlimau, Melaka. Tel : 06-263 1677 Fax : 06-263 1215
□ Kulim Office : No. 537, Jalan Waja 4, Taman Industri Waja, 09000 Kulim, Kedah, Malaysia. Tel : 04-489 3066 Fax : 04-489 1677
□ Ipoh Office : No.1, 3 & 5, Klebang Bistari 5, Kawasan Perindustrian Klebang Bistari, 31200 Chemor Perak. Tel : 05-292 6986, 05-292 6976 Fax : 05-292 6936



PRODUCTS SPECIFICATION





ARDEX WPM 185

Compliant to AS4654.1

High puncture resistance

APP Bitumen Modified Membrane

Excellent resistance to UV exposure

Available in Grey & White mineral finishes

Excellent resistance to atmospheric agents

ARDEX Australia Pty Ltd
2 Buda Way
Kemps Creek NSW 2178
Phone: 1300 788 780
Email: technicalservices@ardexaustralia.com
www.ardexaustralia.com

ARDEX New Zealand Ltd
15 Alfred Street, Onehunga Auckland,
New Zealand 1061
Phone: 0800 227 339
Email: info@ardexnz.com
www.ardex.co.nz

ARDEX WPM 185

Mineral Coated APP Bitumen Membrane

PRODUCT DESCRIPTION

ARDEX WPM 185 is an A.P.P. (Atactic Polypropylene) Plastomeric type modified bitumen membrane, consisting of a specially formulated bituminous compound of distilled asphalt modified with selected high grade visco-elastic polymers and reinforced with a combined reinforcement (Polyester and Fibreglass).

ARDEX WPM 185 is coated with a slate mineral granule topping, while the bottom surface is embossed and protected by a heat sensitive polythene film.

- To act as a temperature gauge during application. When the film melts it shows that the compound is at the correct temperature.
- The embossing is to allow the gases to rapidly escape when heated to its correct installation temperature avoiding possible problems of bubbling and blistering.

FEATURES

- Compliant to AS4654.1
- Cold flexibility -5 °C
- Good elongation
- High puncture resistance
- Excellent resistance to UV exposure
- Excellent resistance to atmospheric agents

USES

ARDEX WPM 185 is used as a capping layer in UV exposed membrane systems for environments such as rooftops, decks, terraces, and tanking environments. The mineral finish allows for light maintenance foot traffic. ARDEX WPM 185 is available in both slate grey mineral and white mineral finishes.

SUBSTRATE PREPARATION

By way of mechanical methods and vacuum cleaning as necessary, remove all dirt, dust, curing compounds, oils, grease, surface sealers, and any other contaminants prior to application. Prepare surface to leave sound, clean, free from sharp edges, loose or other materials which may damage the membrane.

Damaged concrete between 2mm-30mm can be treated with ARDEX A46. Spalling concrete must be treated accordingly with the ARDEX Concrete Repair range such as ARDEX BR 345, please review the respective product data sheets on treating spalling concrete.

SUBSTRATE PRIMING

Prior to the application of ARDEX WPM 185 all prepared concrete surfaces should be primed with ARDEX WPM 240 at a rate of 5m²–6m² per litre and allowed to dry. Coverage rate will depend on the porosity of the substrate being treated.

Note: ARDEX WPM 185 can be used as a single layer UV exposed waterproofing membrane, however it is generally installed within a multi-layer waterproofing membrane system. When used as a capping layer over a base sheet, ARDEX WPM 240 is not required. Ensure the previous base layer is clean, sound, dry, and free from sharp edges, loose, or other materials which may damage the ARDEX WPM 185 membrane.

INSTALLATION

To ensure the correct shedding of water, the membrane must be installed from the lowest point of the area and work towards the highest point, in the direction of the slope. A layer of ARDEX WPM 185 should be completely unrolled and aligned. Using a suitable pressure roller and suitable LPG gas torch equipment, the membrane is to be applied using appropriate application techniques.

Using an LPG gas torch, fuse the laps of the ARDEX WPM 185 to form a continuous membrane layer, with minimum side laps of 100mm and minimum end laps of 150mm.

MEMBRANE TERMINATION

Membrane termination detail to be in accordance with AS4654 or ARDEX recommendation - please consult ARDEX Technical Department for further information (technicalservices@ardexaustralia.com).

Vertical Termination Finishing

ARDEX WPM 185 shall be terminated with one of the suggested options.

Option 1:

The termination with an ARDEX Pressure Seal Strip shall be attached onto the wall using appropriate mechanical fixings at maximum 150mm centres. An approved ARDEX sealant shall be used along the top edge of the ARDEX Pressure Seal Strip to the waterproof wall. Membrane termination height to be in accordance with AS4654 Appendix A.

Option 2:

The termination of an Over-Flashing shall be sealed into the waterproof wall via a minimum 30mm x 30mm reglet. The Over-Flashing must be fixed in place with either ARDEX RA 88 PLUS or ARDEX CA 20 P. Membrane termination height to be in accordance with AS4654 Appendix A.

Option 3:

Terminate the membrane directly into a minimum 30mm x 30mm reglet. Once the membrane has been appropriately installed, the termination (reglet) shall be filled with ARDEX RA 88 PLUS. Membrane termination height to be in accordance with AS4654 Appendix A.

Horizontal Termination Finishing

The termination of the membrane shall be terminated into the concrete substrate via a minimum 30mm x 30mm reglet. Once the membrane has been appropriately installed, the

ARDEX WPM 185

Mineral Coated APP Bitumen Membrane

termination (reglet) shall be filled with an ARDEX approved product such as ARDEX RA 88 PLUS, ARDEX RA 56, ARDEX WA 100, or ARDEX EG 800 F.

Dependent on reglet size and length ARDEX suggest both products ARDEX RA 56 and ARDEX EG 800F to be bulk filled with ARDEX Aggregate.

All remaining termination details such as vertical downward, parapet capping, cavity flashing, external door opening etc refer to AS4654.

TECHNICAL DATA

CHARACTERISTIC	TEST METHOD	NOMINAL VALUES
Length	EN 1848-1	8m
Width	EN 1848-1	1m
Thickness	EN 1849-1	4mm
Aeric Mass	EN 1849-1	4.5kg/m ²
Watertightness (A)	EN 1928	60kPa
Tensile Strength Longitudinal Transversal	EN 12311-1	700 N/50mm 550 N/50mm
Elongation at Break Longitudinal Transversal	EN 12311-1	40% 45%
Resistance to Tearing (nail shank)	EN 12310-1	150 / 150N
Dimensional Stability Longitudinal Transverse	EN 1107-1 met. A	± 0.3%
Flexibility at Low Temperature	EN 1109	-5°C
Flow Resistance at Elevated Temperature	EN 1110	120°C
Surface Finishes	Lower ¹ Top ²	Polymeric Film PE/PP Mineral Granules
WHITE MINERAL FINISH ONLY		
Solar Reflectance	ASTM E-903	70
Infrared Emittance	ASTM E-903	%
Solar Reflect Index (SRI)	ASTM E-1980	90

Note 1) Lower surface; the surface which is applied to the structure being waterproofed.

Note 2) Top surface; exposed to underside of covering membrane.

PACKAGING

Roll size: 1m x 8m

Rolls per pallet: 25

STORAGE

All rolls of ARDEX WPM 185 should be stored in a covered area protected against sunlight and UV radiation. Rolls should be stored in a vertical position on a smooth floor so as not to damage the edges.

LIMITATIONS

ARDEX WPM 185 is not designed as a heavy trafficable membrane, but can be used for light maintenance foot traffic only.

Before any substrate preparation, installation or finishing methods relating to ARDEX product are undertaken, please be aware of any potential risks and use appropriate PPE (personal protective equipment). This may involve contacting substrate manufacturers for Safety Data Sheets.

SAFETY DATA

Avoid contact with skin and eyes. In case of contact with the eyes rinse with running water until advised to stop by the Poisons Information Centre or a doctor, or for at least 15 minutes. Wear protective gloves, clothing, face and eye protection. Suspected of causing cancer. This product is combustible. On combustion, may emit toxic fumes of carbon monoxide (CO). Avoid inhaling dust/ fume/ gas/ mist/ vapours/ spray. If fumes or combustion products are inhaled remove from contaminated area. Ensure adequate ventilation during application. Check with your local Council regarding the disposal of contents. Call the Poisons Information Centre on 131 126 (AUS) and 0800 764 766 (NZ) or call a doctor if you feel unwell. At times updates can occur to data. To ensure you have the most current technical and safety information please consult the latest data sheets found on the product page at www.ardexaustralia.com

GUARANTEE

ARDEX Australia Pty Ltd (“we” or “us”) guarantees this product (“our goods”) is free from manufacturing defects and will perform to any applicable specification published by us for 10 years from the date of purchase. Our liability under this guarantee is limited at our option to replacement of the product, repair of any damage to the immediate surface or area of application of the product, or compensation, in each case if we are satisfied loss or damage was due to a breach of this guarantee. This guarantee does not apply if damage or loss is due to failure to follow published instructions or any act or circumstance beyond our control, including shade variations and efflorescence. If you wish to make a claim under this guarantee you must notify us (ARDEX Australia Pty Ltd, 2 Buda Way Kemps Creek NSW 2178; Toll Free: 1800 224 070; Email: technicalservices@ardexaustralia.com) and provide evidence of your purchase of the product within 30 days of any alleged loss or damage occurring. We reserve the right to ask you for satisfactory evidence of any alleged loss or damage. Any claim under this guarantee is at your cost. This guarantee is in addition to any rights or remedies you may have as a “consumer” under the Australian Consumer Law and to that extent you need to be aware that: “Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for

ARDEX WPM 185

Mineral CoatedAPP Bitumen Membrane

compensation for any other reasonably foreseeable loss of damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure”.

DISCLAIMER

The technical details, recommendations and other information contained in this data sheet are given in good faith and represent the best of our knowledge and experience at the time of printing. It is your responsibility to ensure that our products are used and handled correctly and in accordance with any applicable Australian Standards. Our instructions and recommendations are only for the uses they are intended. Users are advised to confirm that this product is suitable for their application and conforms with the specifications of the system. We also reserve the right to update information without prior notice to you to reflect our ongoing research and development program. Country specific recommendations, depending on local standards, codes of practice, building regulations or industry guidelines, may affect specific installation recommendations. The supply of our products and services is also subject to certain terms, warranties and exclusions, which may have already been disclosed to you in prior dealings or are otherwise available to you on request. You should make yourself familiar with them.

© ARDEX Australia Pty Ltd 2025.

All aforementioned products are the trade marks of ARDEX Australia Pty Ltd, its licensors and affiliates.

This data sheet was issued in January 2025 and is valid for 3 years, in some instances a newer version may be published. Always refer to www.ardexaustralia.com for the latest technical data from ARDEX Australia Pty Ltd.

TEST REPORT

CLIENT NAME : ARDEX SINGAPORE PTE LTD
ADDRESS : NO. 26 TUAS AVENUE 4
SINGAPORE 639376
ATTENTION TO : MR PATRICK LEE
TEL NO. : 6862 3381
FAX NO. : 6862 3381
ACCOUNT CHARGEABLE TO : ARDEX SINGAPORE PTE LTD

PROJECT CODE : C0116
PROJECT TITLE : GENERAL TESTING

SUBJECTS : 1) DIMENSIONAL STABILITY
2) TENSILE STRENGTH & ELONGATION
3) TENSILE SHEAR AT JOINTS
4) RESISTANCE TO LEAKAGE AT JOINT

TEST STANDARD : SS374 : 1994

JOB REF. : ADM/13/0119
CLIENT REFERENCE : WPM 185


DATE RECEIVED : 11-Jan-2013
DATE OF REPORT : 08-Mar-2013
TOTAL PAGES : 4 (including cover page)



The results reported herein have been performed in accordance with the laboratory's terms of accreditation under the Singapore Accreditation Council - Singapore Laboratory Accreditation Scheme

Terms & conditions:

1. The Report is prepared based on the tests requested and on the specific items submitted to Admaterials for testing. Admaterials assumes no responsibility for variations in quality or other characteristics of items submitted under conditions over which Admaterials has no control. This Report does not constitute a recommendation for, or endorsement of, the item or material tested.
2. Admaterials agrees to use a reasonable degree of diligence in the manner of performing the tests, inspections or services but no warranties are given and none may be implied directly or indirectly relating to Admaterials' test results, services or facilities. Admaterials shall not be liable for any collateral, special or consequential damage.
3. The Report must not be used in advertisements without the written consent of Admaterials.
4. The Report shall not be reproduced except in full and unless approval in writing has been given by Admaterials.
5. No other third party can obtain the Report through Admaterials, unless specified in the Admaterials registration form or he has received written instruction from the applicant to authorise Admaterials to do so.

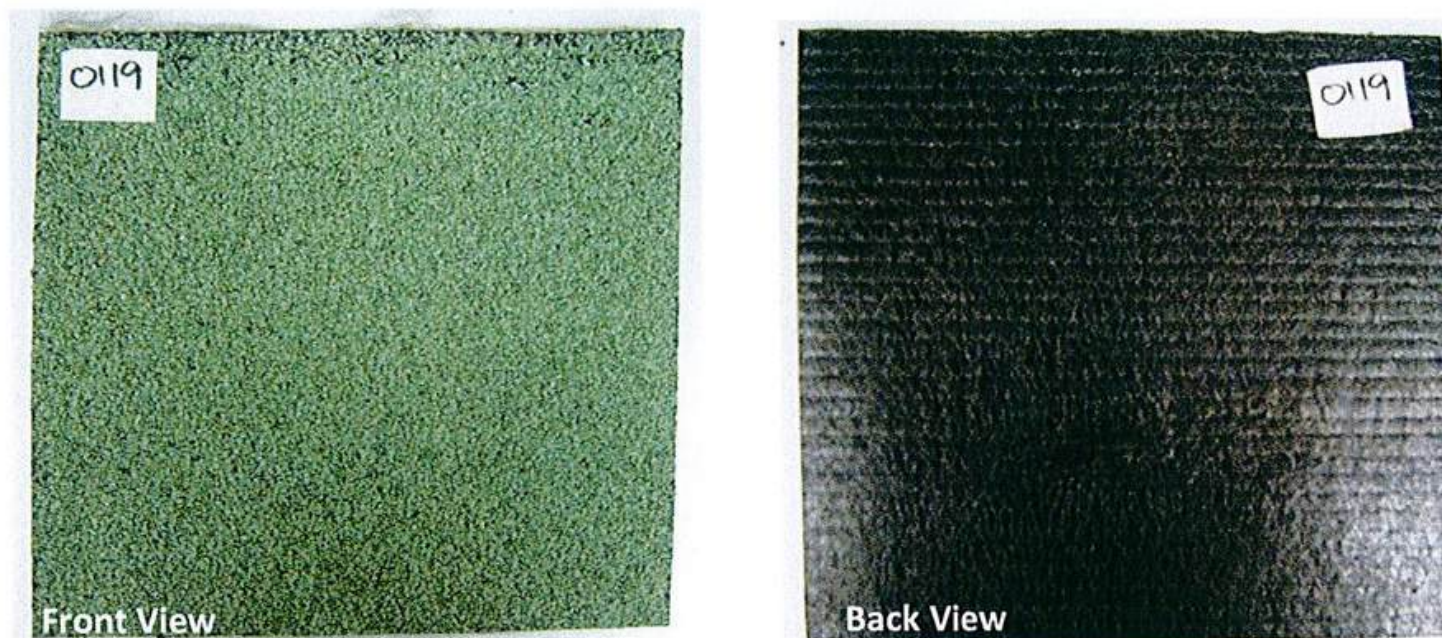TESTING OF BITUMINOUS PREFORMED WATERPROOFING MEMBRANE - WPM 185**Photograph 1. Sample as received.**

S/No	Description	Test Results	SS374:1994 Requirements
1	Dimensional Stability (%) - Longitudinal Direction - Transverse Direction	-0.21 -0.05	$\pm 0.5\%$ (both Longitudinal & Transverse Direction)
2	Maximum Tensile Strength (N/mm ²) - Longitudinal Direction - Transverse Direction	1.1 3.6	≥ 3.0 N/mm ² (both Longitudinal & Transverse Direction)
	Elongation at Break (%) - Longitudinal Direction - Transverse Direction	49 46	$\geq 45\%$ (both Longitudinal & Transverse Direction)
3	Tensile Shear at Joints, (N)	Failure occurs outside the Joint 368.2	Failure should occur outside the joint; if not the minimum breaking strength shall be ≥ 500 N
4	Resistance to leakage at joint	No leakage	No leakage shall be observed.

Table 1. Summary of Test Results

1) DIMENSIONAL STABILITY

Sample Reference	WPM 185			
Date of Test	14-Jan-13			
Cutting Direction	Transverse Edge		Centre	
Linear Change (%)	Longitudinal	Transverse	Longitudinal	Transverse
	-0.15	-0.07	-0.27	-0.02
Average Linear Change (%)	Longitudinal Direction		Transverse Direction	
	-0.21		-0.05	

Remarks : The sample was tested as per received (See Photograph 1.).

2) TENSILE STRENGTH & ELONGATION AT BREAK

Sample Reference	WPM 185			
Date of Test	7-Mar-13			
Direction	Longitudinal			
Shape of Specimen	Dumbell shape / Die C			
Test Specimen	1	2	3	Median
Tensile Strength, N/mm ²	1.1	1.1	1.5	1.1
Elongation, %	41	55	49	49

Sample Reference	WPM 185			
Date of Test	7-Mar-13			
Direction	Transverse			
Shape of Specimen	Dumbell shape / Die C			
Test Specimen	1	2	3	Median
Tensile Strength, N/mm ²	3.4	3.6	3.8	3.6
Elongation, %	46	40	54	46

Remarks : The sample was tested as per received. (See Photograph 1.)

3) TENSILE SHEAR AT JOINTS

Sample Reference	WPM 185				
Date of Test	21-Feb-13				
Overlapping Width	As per manufacturer's recommendation				
Test Specimen	1	2	3	4	5
Mode of Failure	Failure occurs outside the Joint	Failure occurs outside the Joint	Failure occurs outside the Joint	Failure occurs outside the Joint	Failure occurs outside the Joint
Maximum Load , N	358.62	370.55	347.67	409.57	354.37
Average Maximum Load, N	368.2				

Remarks : The sample was tested as per received. (See Photograph 1.)

4) RESISTANCE TO LEAKAGE AT JOINT

Sample Reference	WPM 185		
Date of Test	26-Feb-13		
Overlapping Width	As per manufacturer's recommendation		
Test Specimen	1	2	3
Observations	No leakage	No leakage	No leakage

Remarks : The sample was tested as per received. (See Photograph 1.)

PREPARED BY:

NURHIDAYAH B.A. MUNIN
Assistant Engineer

APPROVED BY:

JULIFIN
Assistant Manager

SIMILAR PROJECT REFERENCES
















PROJECT: KWSP ALOR SETAR

PROJECT VALUE : RM150,000.00

SIZE: 1,300 sqMETER, EXPOSED ROOF SLAB

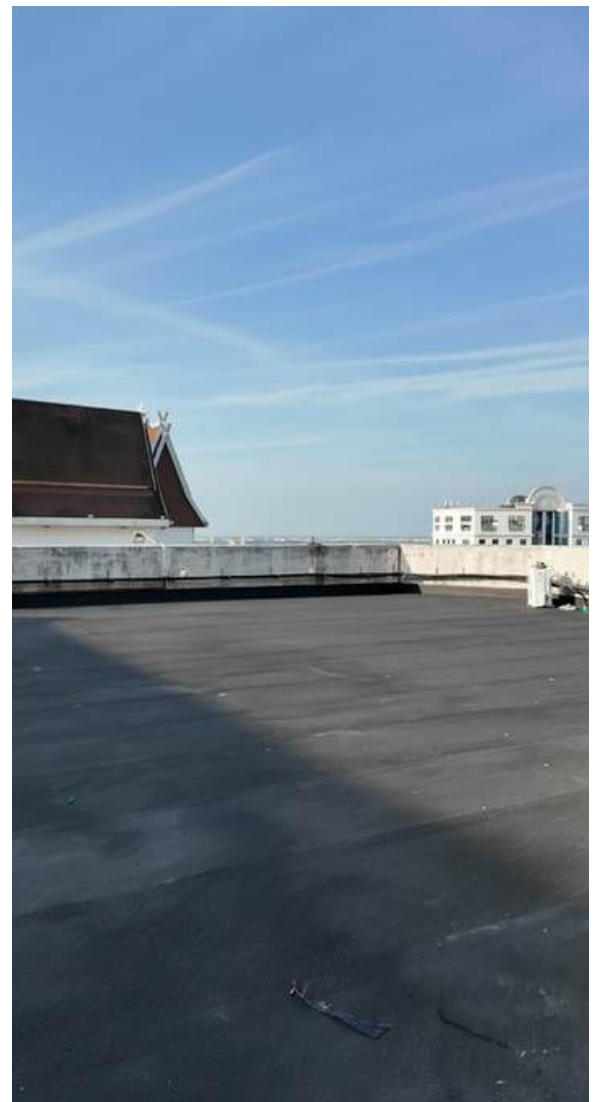

PROJECT: SHAH ALAM BUNGALOW


SIZE: 800 sqMETER, EXPOSED ROOF SLAB

Project Value: RM56,000.00



PROJECT: KOLEJ MARA, Cracks Repair & Membrane Installation, SIZE: 1000 sqMETER


Project Value : RM70,000.00

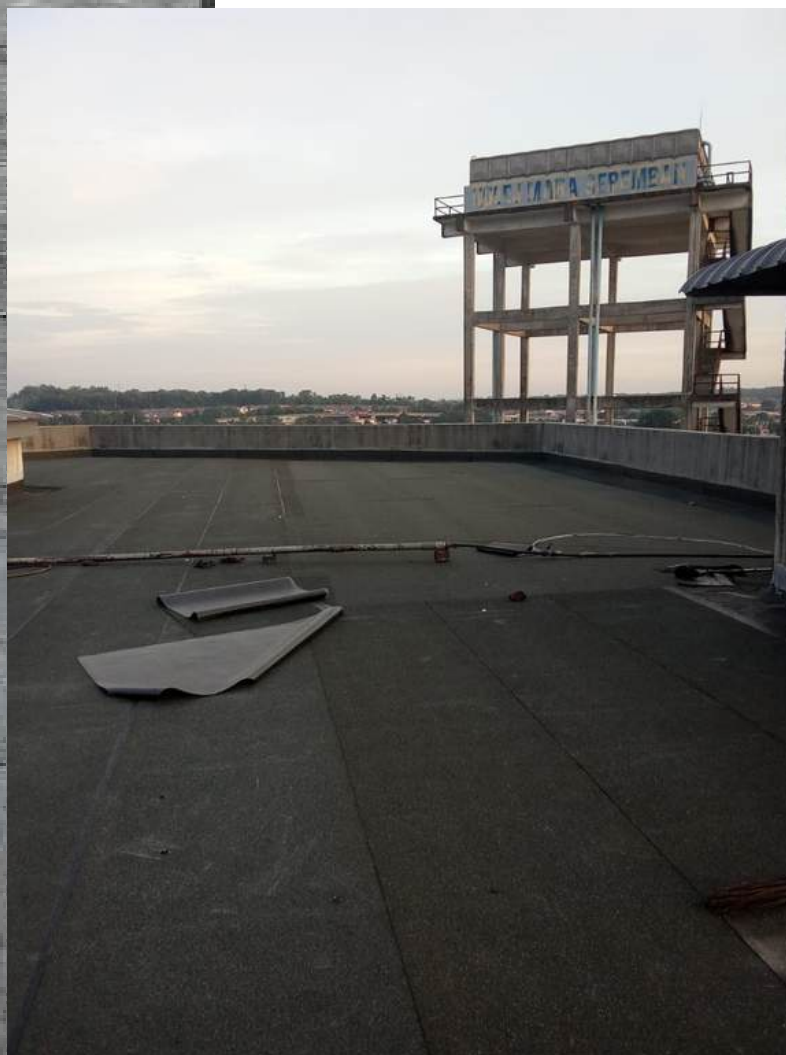

PROJECT: LOTUS AMPANG

SIZE: 1,000 sqMETER, EXPOSED ROOF SLAB

Project Value: RM80,000.00

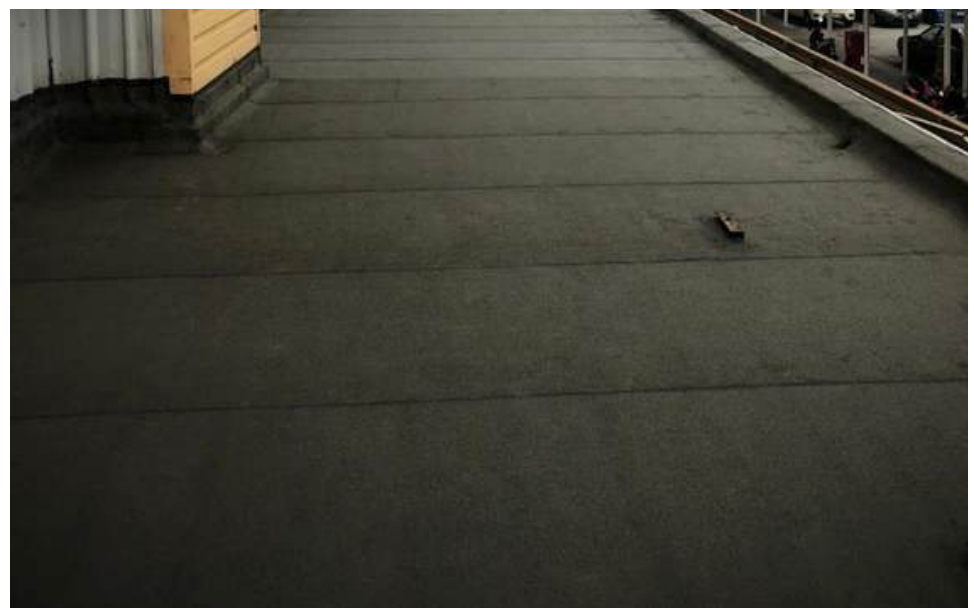

PROJECT: KWASA SALES GALLERY

SIZE: 600 sqMETER, EXPOSED ROOF SLAB

Project Value: RM48,000.00




PROJECT: St. Rosyam Mart @Jakel Mall

SIZE: 1000 sqMETER, Sanded Membrane

Value : RM85,000.00


(Ponding test 48Hrs)

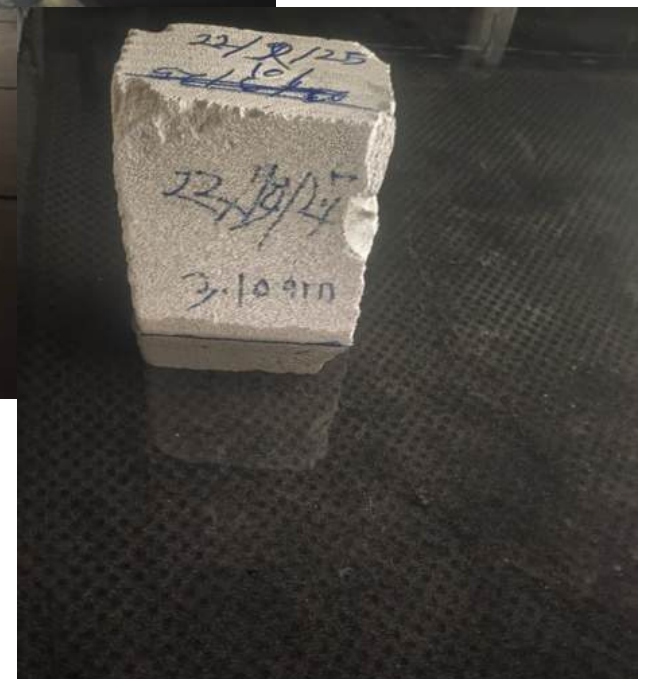

PROJECT: MICRON SEMI CONDUCTOR

SIZE: 800 sqMETER, 4 Washrooms 4 Surau

Project Value: RM250,000.00

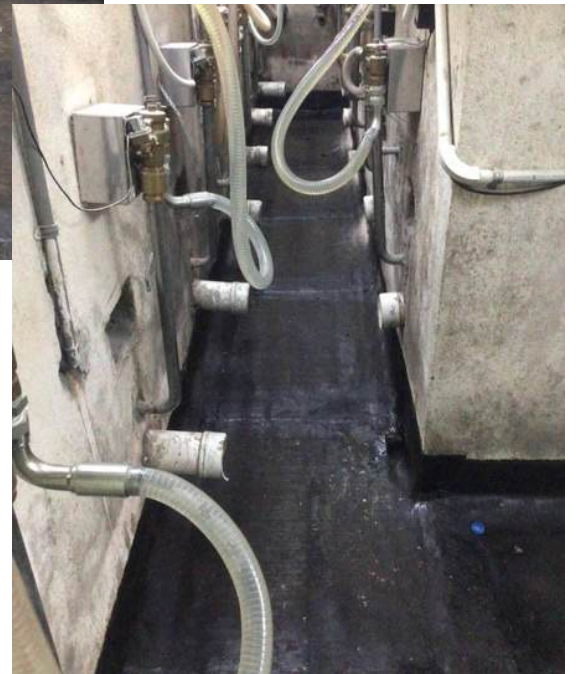

METHOD OF STATEMENT















METHOD OF STATEMENT- TORCH ON MEMBRANE

A. Photos	B. Description
 	1. SURFACE PREPARATION • CLEANING: BEGIN BY THOROUGHLY CLEANING THE SUBSTRATE TO REMOVE ALL DUST, DIRT, DEBRIS, OR CONTAMINANTS THAT COULD INTERFERE WITH ADHESION. USE A STIFF BRUSH OR COMPRESSED AIR TO ENSURE A CLEAN SURFACE. • CRACK SEALING: INSPECT THE SURFACE FOR CRACKS. SEAL ALL IDENTIFIED CRACKS USING PYE 921. APPLY THE SEALANT EVENLY WITH A SUITABLE TOOL (E.G., A TROWEL OR CAULKING GUN) AND ALLOW IT TO CURE FULLY AS PER THE MANUFACTURER'S INSTRUCTIONS BEFORE PROCEEDING.

METHOD OF STATEMENT- TORCH ON MEMBRANE

A. Photos	B. Description
 	2. ANGLE FILLET INSTALLATION • PREPARATION: ENSURE THAT AREAS DESIGNATED FOR ANGLE FILLETS (JUNCTIONS, CORNERS, AND TRANSITIONS) ARE CLEAN, DRY, AND FREE OF LOOSE MATERIAL. • APPLICATION: USE PYE 921 TO FORM ANGLE FILLETS AT ALL SPECIFIED LOCATIONS. APPLY THE GROUT TO CREATE SMOOTH, UNIFORM FILLETS THAT PROVIDE A STABLE BASE FOR THE MEMBRANE. ALLOW THE GROUT TO SET AS PER THE MANUFACTURER’S GUIDELINES.

METHOD OF STATEMENT- TORCH ON MEMBRANE

A. Photos	B. Description
 	3. PRIMING • MIXING: PREPARE BITUMEN PRIMER ACCORDING TO THE MANUFACTURER’S INSTRUCTIONS, ENSURING PROPER CONSISTENCY. • APPLICATION: APPLY THE PRIMER EVENLY ACROSS THE ENTIRE SURFACE USING A BRUSH OR ROLLER. FOCUS ON ACHIEVING FULL COVERAGE, PARTICULARLY OVER SEALED CRACKS AND IRREGULAR AREAS. • DRYING: ALLOW THE PRIMER TO DRY COMPLETELY BEFORE MOVING TO THE NEXT STEP. DRYING TIME WILL DEPEND ON AMBIENT TEMPERATURE, HUMIDITY, AND VENTILATION.

METHOD OF STATEMENT- TORCH ON MEMBRANE

A. Photos	B. Description
 	4. TORCH-ON MEMBRANE APPLICATION • MATERIAL PREPARATION: UNROLL THE TORCH ON MEMBRANE AND CUT IT INTO MANAGEABLE LENGTHS, ACCOUNTING FOR OVERLAPS (TYPICALLY 100MM FOR SIDE LAPS AND 150MM FOR END LAPS). • POSITIONING: LAY OUT THE MEMBRANE SHEETS ON THE PRIMED SURFACE, ENSURING CORRECT ALIGNMENT AND SUFFICIENT OVERLAP AT SEAMS. • TORCHED APPLICATION: USE A PROPANE TORCH TO HEAT THE UNDERSIDE OF THE MEMBRANE UNTIL THE BITUMEN SOFTENS AND BECOMES MOLTEN. PRESS THE HEATED MEMBRANE FIRMLY ONTO THE SURFACE TO ENSURE FULL ADHESION, SMOOTHING IT OUT TO REMOVE AIR POCKETS OR WRINKLES. • SEALING OVERLAPS: HEAT AND PRESS THE OVERLAPS CAREFULLY TO CREATE A WATERTIGHT SEAL, ENSURING NO GAPS REMAIN.

METHOD OF STATEMENT- TORCH ON MEMBRANE

A. Photos	B. Description
	5. DETAILING • CORNER AND EDGE TREATMENT: APPLY PU SEALANT TO ALL CORNERS, EDGES, AND TERMINATION POINTS OF THE MEMBRANE. SPREAD THE SEALANT SMOOTHLY TO FULLY COVER THE MEMBRANE EDGES AND PREVENT WATER INGRESS. • INSPECTION: CONDUCT A THOROUGH INSPECTION OF THE INSTALLED MEMBRANE TO CONFIRM THERE ARE NO BLISTERS, UNSEALED SEAMS, OR EXPOSED EDGES.

METHOD OF STATEMENT- TORCH ON MEMBRANE

A. Photos	B. Description
 	6. QUALITY CONTROL • ADHESION TEST: PERFORM RANDOM CHECKS TO VERIFY THAT THE MEMBRANE IS SECURELY BONDED TO THE SUBSTRATE. • VISUAL INSPECTION: EXAMINE THE ENTIRE APPLICATION FOR DEFECTS SUCH AS TEARS, WRINKLES, OR INCOMPLETE SEALS. • DOCUMENTATION: RECORD KEY DETAILS OF THE INSTALLATION PROCESS, INCLUDING MATERIAL BATCH NUMBERS, WEATHER CONDITIONS, AND ANY DEVIATIONS FROM THIS METHOD.



OUR SERVICES



Torch-On-Membrane System



Epoxy Painting System



Penetration Waterproofing System



PU (Polyurethane) Grouting Injection System



PU (Polyurethane) Sealant



Cementitious Waterproofing System

