


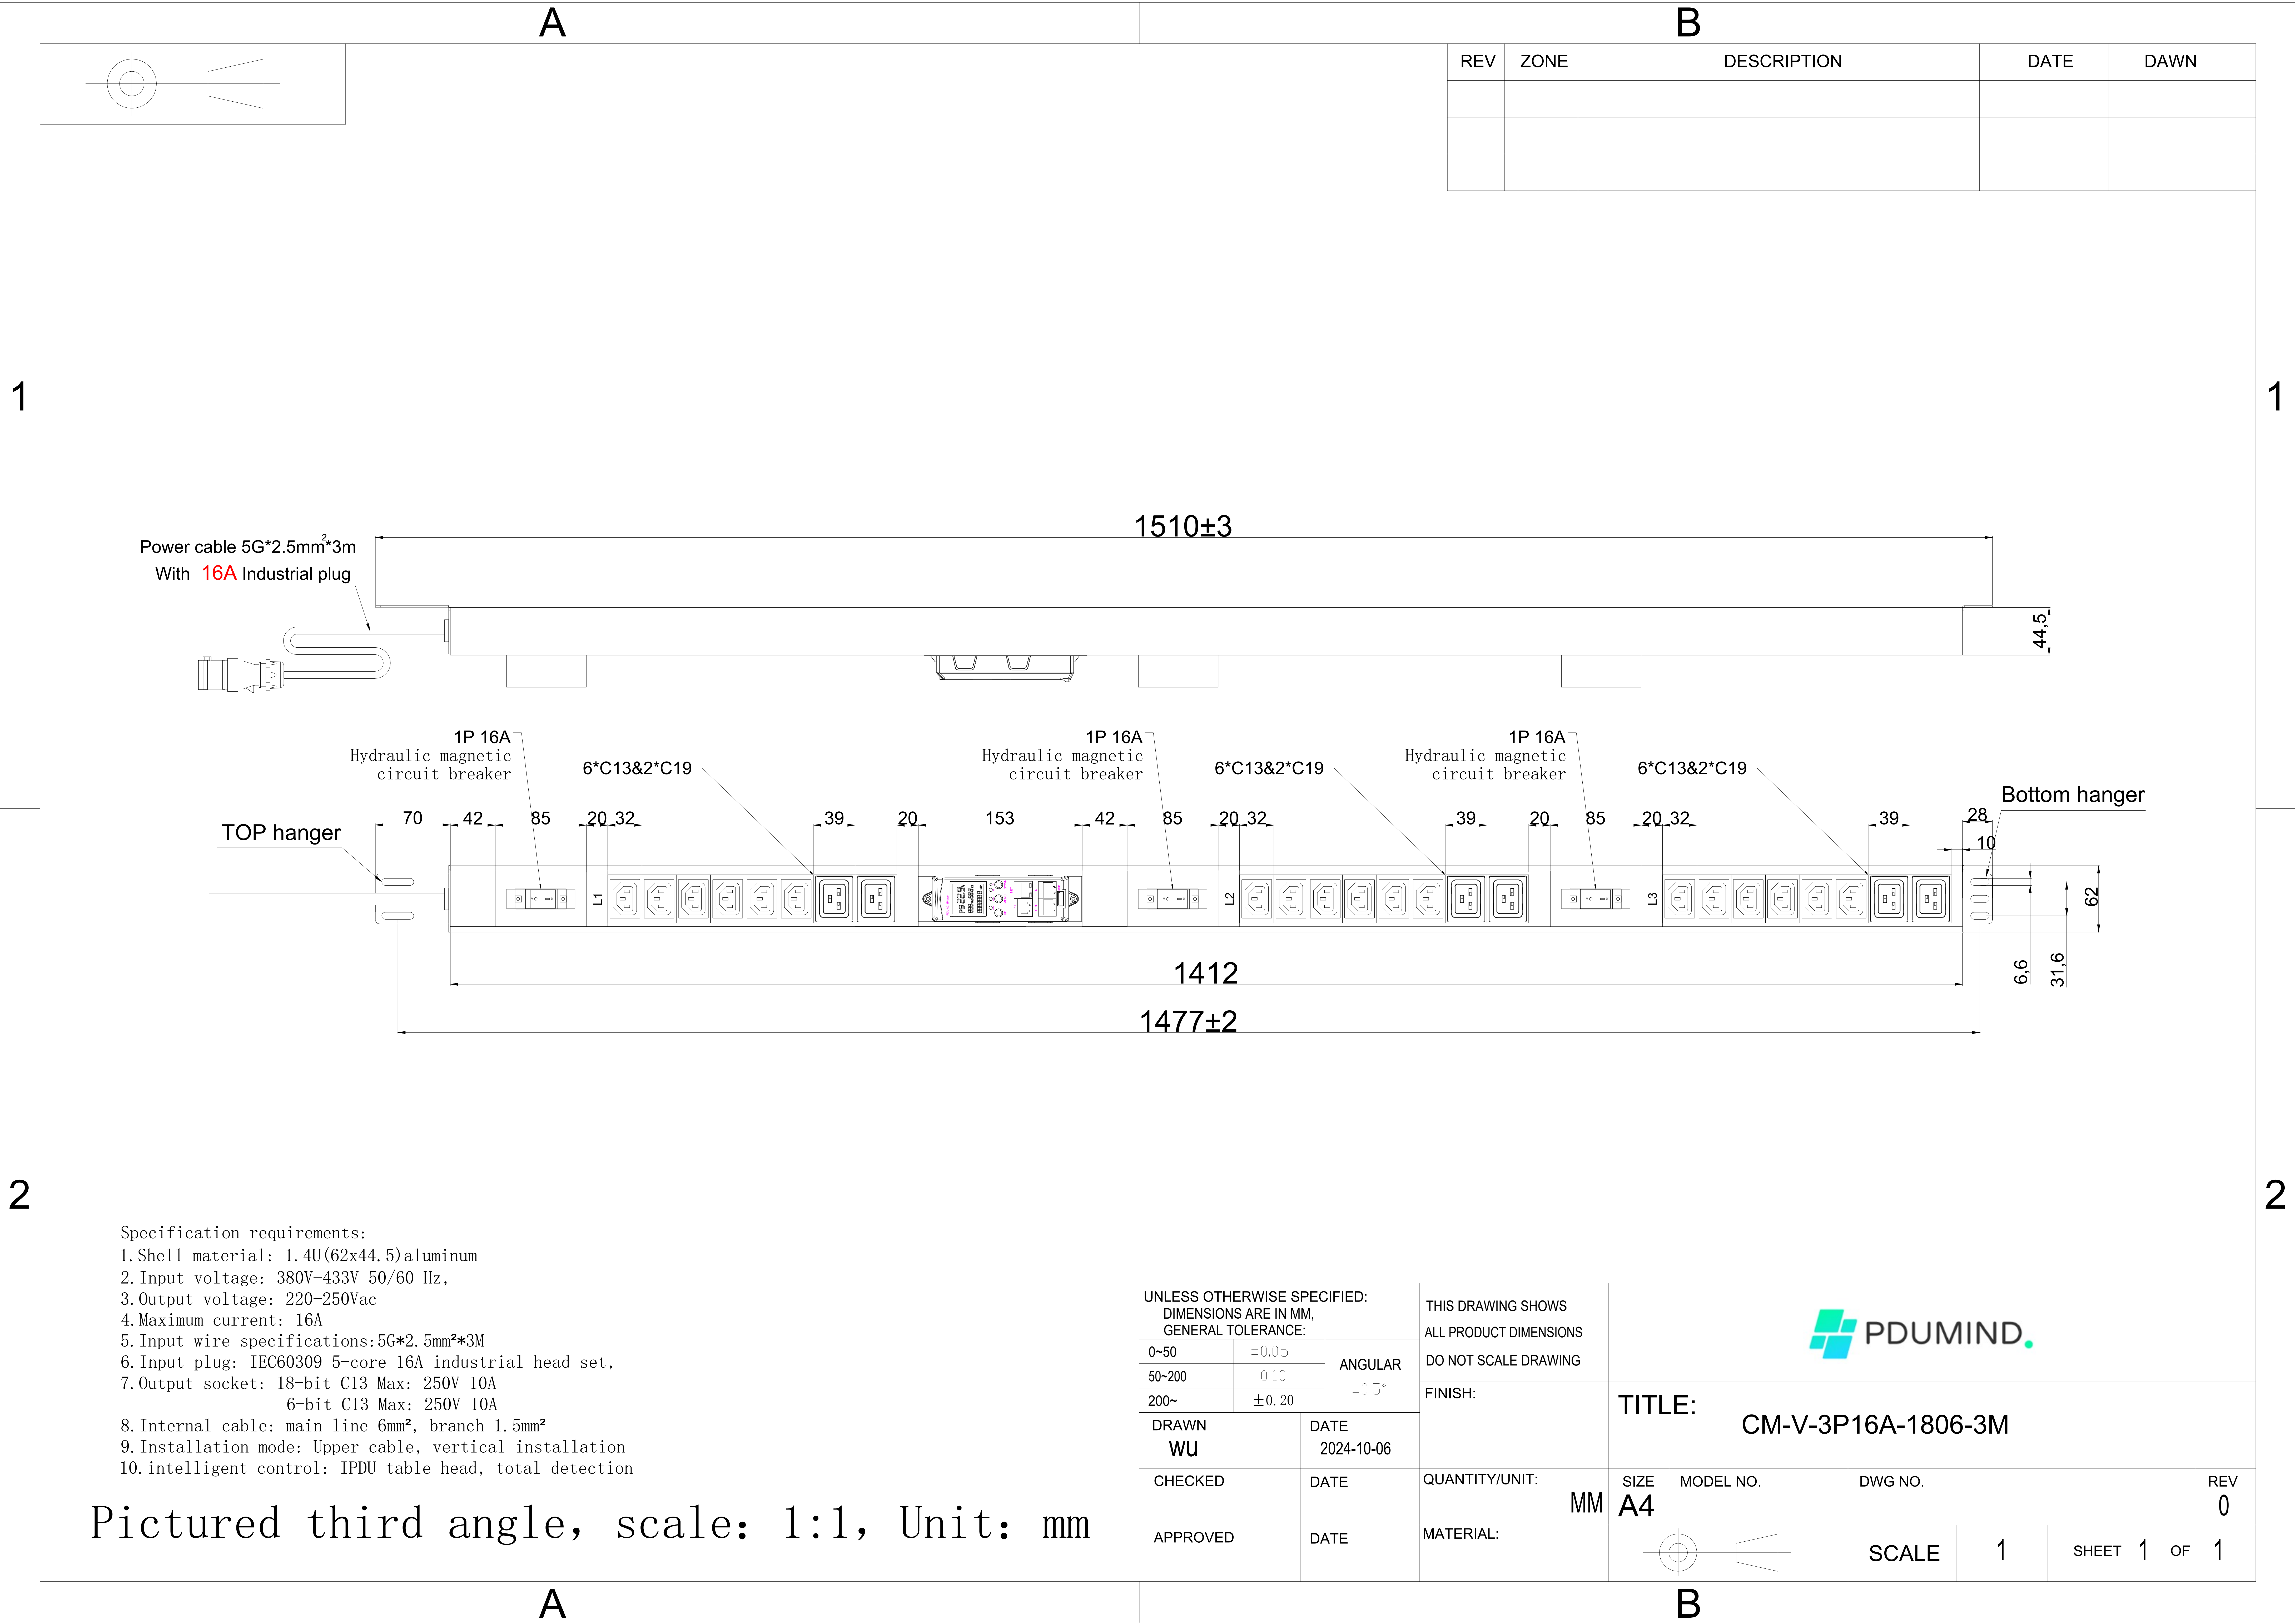

Specification requirements:

- 1.Shell material: 1.4U(62x44.5)aluminum
- 2.Input voltage: 380V-433V 50/60 Hz,
- 3.Output voltage: 220-250Vac
- 4.Maximum current: 16A
- 5.Input wire specifications:5G*2.5mm²*3M
- 6.Input plug: IEC60309 5-core 16A industrial head set,
- 7.Output socket: 18-bit C13 Max: 250V 10A
6-bit C13 Max: 250V 10A
- 8.Internal cable: main line 6mm², branch 1.5mm²
- 9.Installation mode: Upper cable, vertical installation
- 10.intelligent control: IPDU table head, total detection

Pictured third angle, scale: 1:1, Unit: mm