
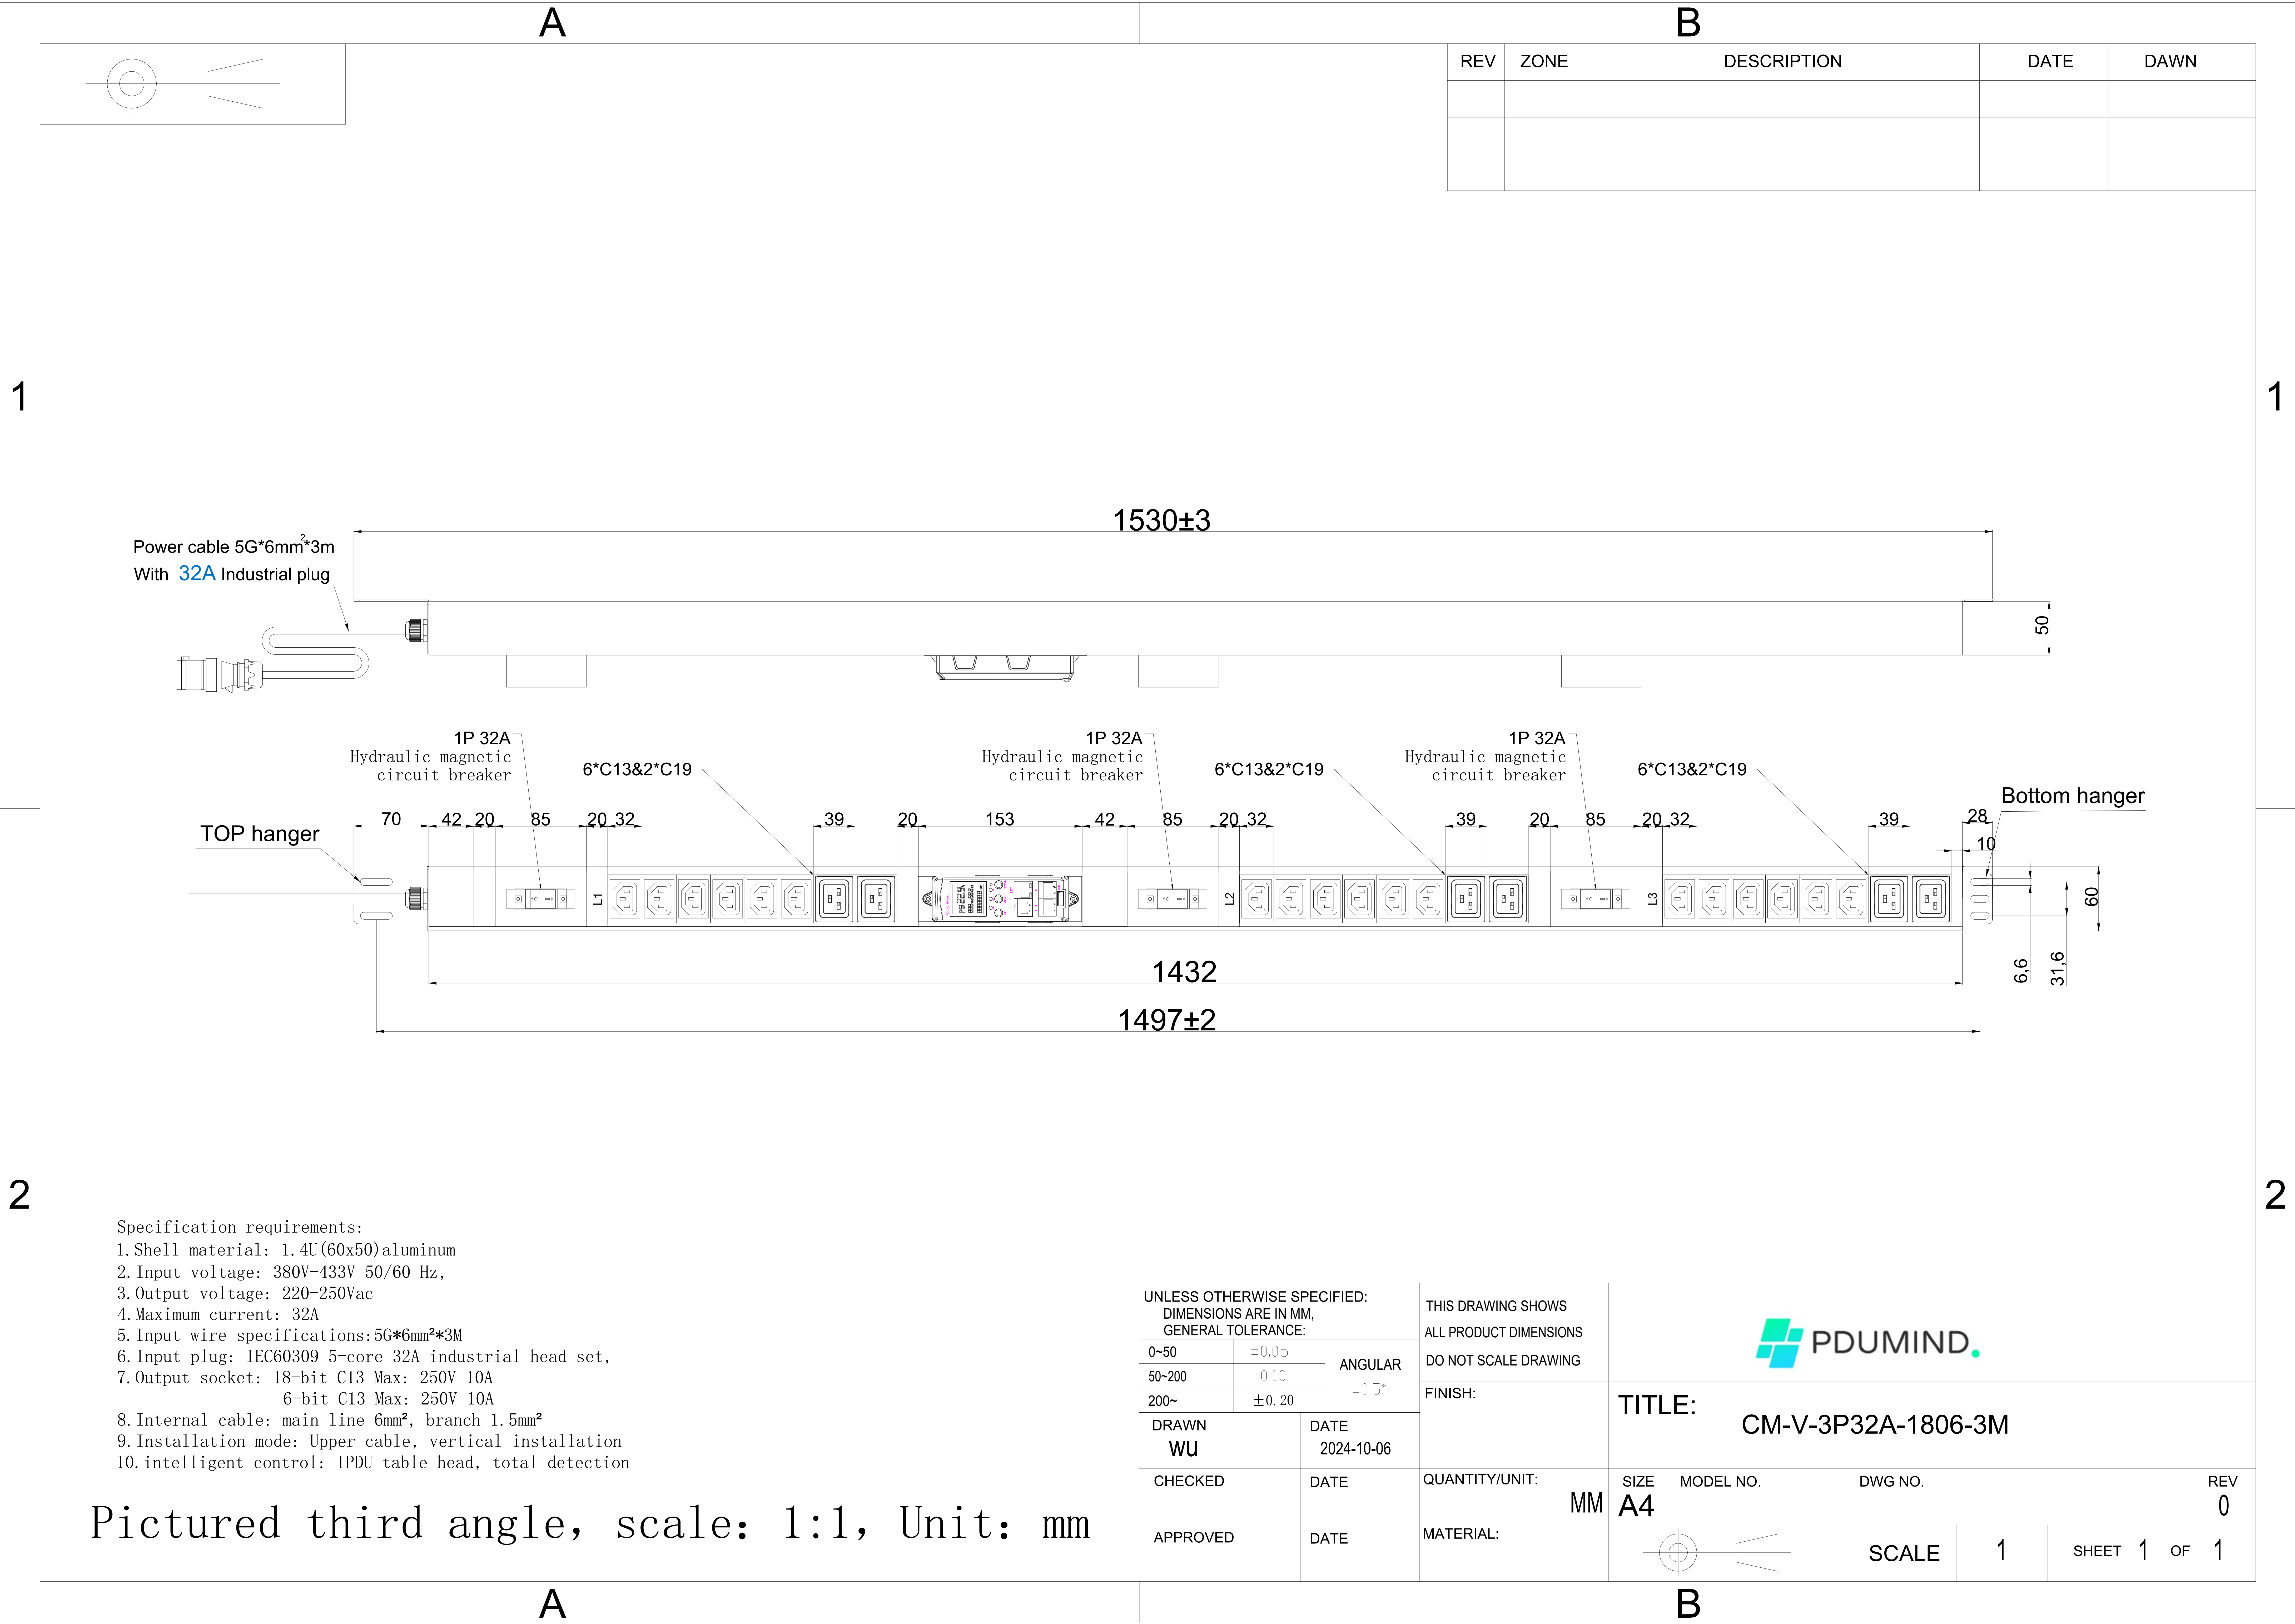


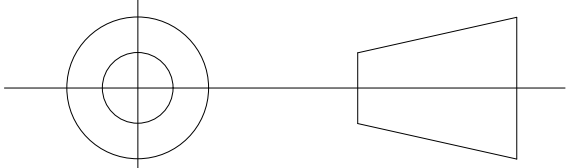

Specification requirements:

- 1.Shell material: 1.4U(60x50)aluminum
- 2.Input voltage: 380V-433V 50/60 Hz,
- 3.Output voltage: 220-250Vac
- 4.Maximum current: 32A
- 5.Input wire specifications:5G*6mm²*3M
- 6.Input plug: IEC60309 5-core 32A industrial head set,
- 7.Output socket: 18-bit C13 Max: 250V 10A
6-bit C13 Max: 250V 10A
- 8.Internal cable: main line 6mm², branch 1.5mm²
- 9.Installation mode: Upper cable, vertical installation
- 10.intelligent control: IPDU table head, total detection

Pictured third angle, scale: 1:1, Unit: mm

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MM, GENERAL TOLERANCE:			THIS DRAWING SHOWS ALL PRODUCT DIMENSIONS DO NOT SCALE DRAWING					
0~50	±0.05	ANGULAR ±0.5°	FINISH:	TITLE: CM-V-3P32A-1806-3M				
50~200	±0.10							
200~	±0.20							
DRAWN WU		DATE 2024-10-06						
CHECKED	DATE	QUANTITY/UNIT: MM						SIZE A4
APPROVED	DATE	MATERIAL:			SCALE	1	SHEET 1 OF 1	