



Smart power

Distribution Union



PRODUCT OVERVIEW

Single-phase and three-phase IPDU smart meter products are based on the **innovative SUM** (sustainable, upgradable and maintainable) design concept technology.

Active metering is available for energy optimization and circuit protection.

User-programmable alarm thresholds reduce risk with real-time local and remote alarms that warn of potential circuit overloads.

Metered rack PDUs provide power usage data to enable data center managers to make informed decisions about load balancing and right IT sizing, significantly reducing total cost of ownership.

Users can configure the metered cabinet PDU through Ethernet access or RS485.

This series of products can be widely used in IDC, bank, securities, government, enterprise and other data center computer rooms.



FEATURES

Functional items	Specifications	
Electrical parameters	Input voltage	176-264VAC, 1PH OR 3P
	Input Current	Max. 63A/80A
	Frequency	50/60 Hz
	Input voltage	176-264VAC
	Output digits	Optional, max 48 bits
	Circuit breaker protection (please specify the brand and quantity)	Optional
Structure size	Installation method (vertical or horizontal)	Vertical
	Width (applicable PDU width series)	1U & 1.5U and above
	Height of protruding socket face	22mm
	Shell material	Plastic PC
Working environment	Operating temperature	-10° to +50°C
	Working humidity	5-95%RH
	Altitude	0 -3000 m
Safety regulations and certificates	Certificates and Statements	CE
User Interface	Display screen	TFT color screen
	Operation button	Up button, down button, reset button
	Communication Interface	Communication Interface Ethernet one, RS485 two, USB one
	Temperature and Humidity Interface	YES
	Indicator light	Operation, electrical energy, communication
Electrical parameter measurement and control functions	PDU total measurement	Voltage, current, power, electrical energy
	Measurements per phase	NO
	Each output can be controlled remotely on/off	NO
	Users can customize the power-on/power-off timing and interval time of each output	NO
	Output units can be controlled in groups	NO
	Administrator permissions can be defined hierarchically	YES
	Custom alarm signal thresholds	Current, voltage can be set
	Cascade function	YES, RS485

MODEL SELECTION

CPDU- 0 1 0 063 -X X X X

1 2 3 4 5 6 7 8 9

1	2	3	4	5
Series	0 = Vertical 1 = Horizontal	1 = Single phase 2 = 2 phase four wire 3 = 3 phase three wire 4 = 4 phase three wire	0 = Branch is not monitored or controlled 1 = Branch control 2 = Branch monitoring 3 = Branch is monitored and controlled	Specification current
6	7	8	9	
Temperature and humidity	Several switching devices	0 = No USB 1 = With USB	0 = No 485 1 = With 485	

The standard product does not have the “customer requirements” part, and the standard product is unified with a network, a USB, a temperature and humidity, and two 485 ports

TECHNICAL PARAMETERS AND INSTALLATION


Product Structure	Serial num.	Project	Parameters	
	1	LCD	Display method	TFT color screen
	2		Display content	Instrument information
	3		Display content	1 horizontal
	4		Refresh time	300 ms
	5	Uppage button	Running light	
	6	Menu button	Energy light	
	7	Page down button	Traffic light	
	8	Temperature and humidity	Short press to turn down the page Short press to cancel the beep	
	9	Network port	Set meter parameter values	
	3 4	RS485 Port	Short press to turn down the page Short press to cancel the beep	
	10 11	RS485	Temperature and humidity sensor detection	
	12	USB	IP address, MAC, DHCP, MASK, Gateway SNMP (V1/V2c/V3) HTTPS/HTTP SNTP Internet users	
	13	Reset button	Cascade configuration, modbus, baud rate	
	14	Error indication	RS485 Cascade input and output	

TERMINAL DEFINITION

RS485 Interface Terminal


RS485 interface, Pin4 (Blue) 485 B terminal, Pin5 (blue and white) 485 A terminal.

Note: The wiring color of RJ45 may be wrong, according to the picture, the end with is the No. 1 terminal.

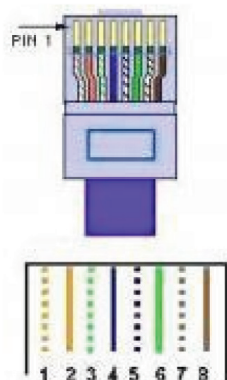


Color	Function Description
1 orange white	NC
2 orange	NC
3 green and white	NC
4 blue	RS485 -B
5 blue and white	RS485 -A
6 green	NC
7 brown and white	NC
8 brown	NC

- Two interfaces are provided to facilitate cascading ; **RS-485** communication cascading is recommended to connect at most 4 instruments to ensure the real-time validity of data through the host and computer connection
- The communication cable can use ordinary shielded twisted pair. When the RS485 communication cable is routed outdoors, attention should be paid to the grounding of the cable shielding layer
- The total length of communication cables should not exceed 1200 meters. RS-485 positive and negative polarity of port 485 must be connected correctly. If the shielded twisted pair is long, it is recommended to connect a 120 Ω at the end and reduce the transmission rate to improve the reliability of communication

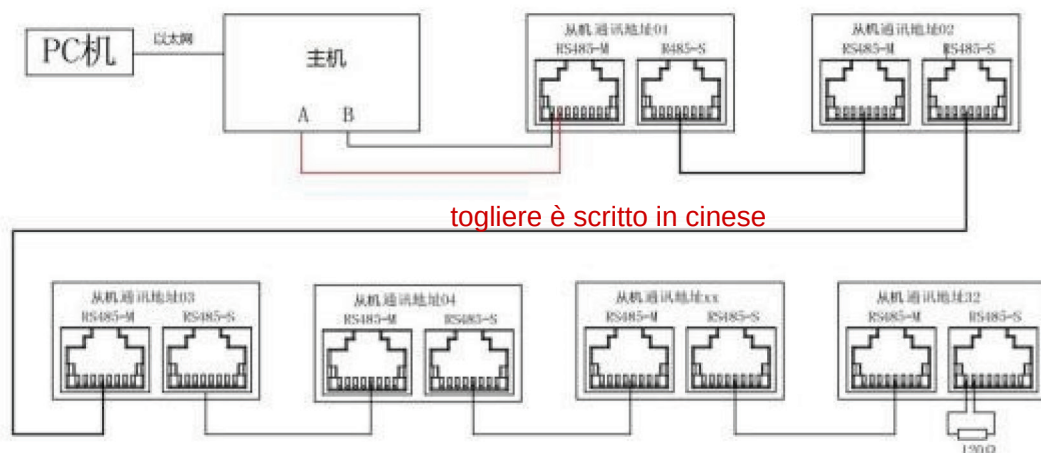

INSTALLATION INSTRUCTIONS AND MAINTENANCE

Meter size, 153*44.5*22mm

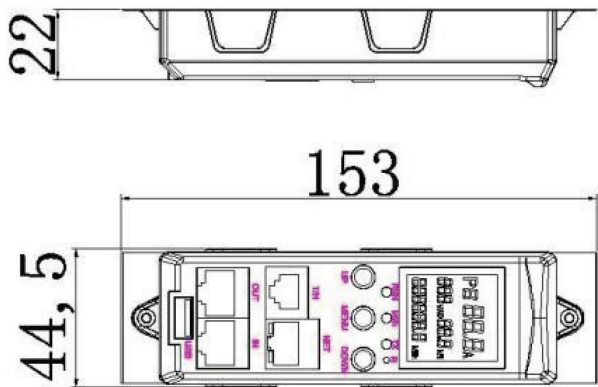

- 1** The rack-mounted power socket unit is installed in a 19" industrial cabinet, installed at the front end of the protected equipment (or system)
- 2** When the socket is connected to the power system, it can be the back equipment is powered on
- 3** The load current of the protected equipment should be $\leq 16A$, do not overload
- 4** It is strictly forbidden to disassemble this product without authorization, otherwise, the all consequences arising from this are at your own risk
- 5** Please use the fixing bracket when installing
- 6** Please connect the wires correctly and pay attention to the safety of electricity