Balanço New Biu

ref. 0281.0



ASSEMBLY INSTRUCTIONS

Assembly video on YouTube:
youtu.be/iEBvSKUwmxU

Product size: **0.44 × 0.53 × 0.95 m**
Frog-shaped baby swing with a high back and a seat belt
Maximum weight: 23 kg
Age: 19 to 36 months
Installed by an adult, no tools needed; the support is not included.
4 steps · keep this manual for future reference.

BEFORE YOU START

Read carefully

Caution

Give this toy to the child only after it has been **assembled by an adult**, and always use it under **adult supervision**.

Assembly rules

- An adult must install the swing and is responsible for checking the knots and testing the swing with their own weight.
- The **hooks** go on the top loop of each rope, held by the knot shown in step 1.
- Hang it on a sturdy support, with the suspension points **45 to 65 cm** apart and the seat **35 to 60 cm** above the ground.
- Always use the **seat belt**, buckled and adjusted to the child.

Tools

- No tools needed: the hook knots are tied by hand

This swing has no screws. The support (beam or frame) is not included.

PARTS LIST

Balanço New Biu parts



SEAT (WITH THE EYES, ROPES AND FEET ALREADY FITTED) 1×

No. 1 · ref. 281002



ROPE 2×

No. 2 · ref. 2090274



FOOT 2×

No. 3 · ref. 935406



HOOK 2×


No. 4 · ref. 287605

PRODUCT ASSEMBLY

Step by step


In each step, the arrows show where the part goes, the **black numbers** give the order and the **yellow letters** point to the details explained under the picture.

1 STEP 1 OF 4
Hooks on the ropes

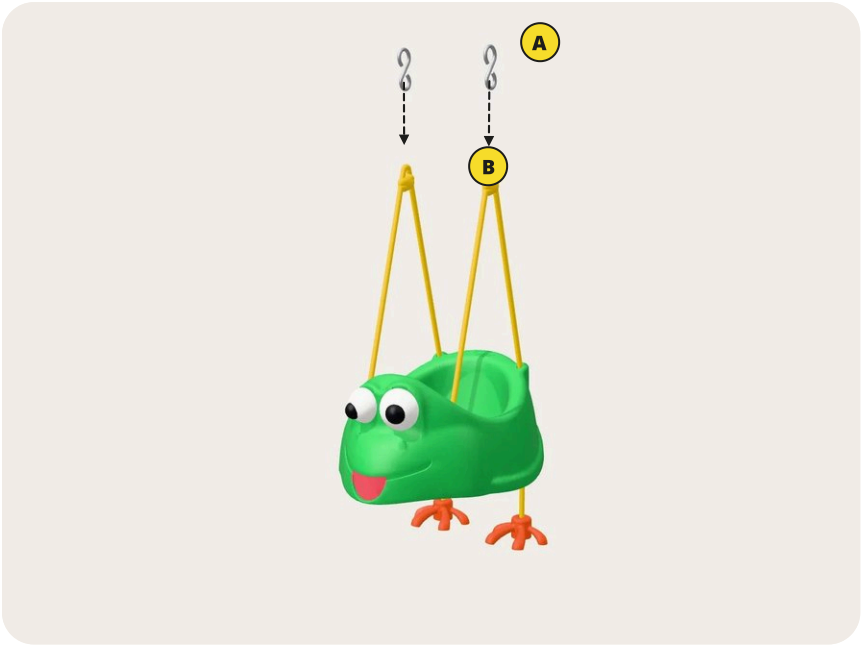

A Hook

B Rope loop

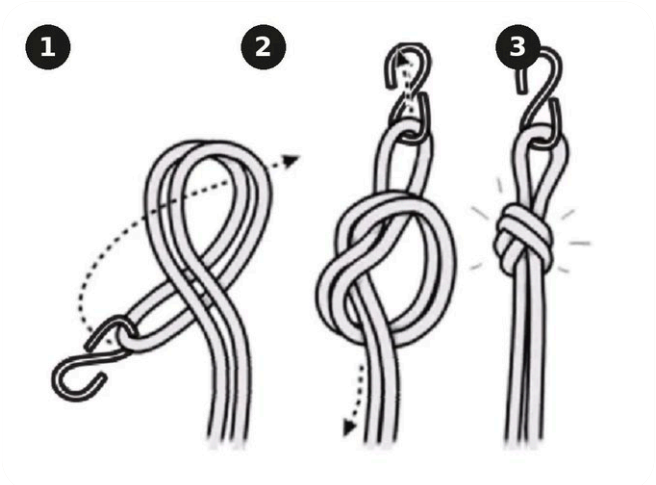

The hook knot, step by step

Each rope has a **loop** at the top. Fasten a **hook** to each loop, as in the picture:

1. Put the rope loop through the eye of the hook and fold the rope, making a figure-eight turn.

2. Pass the end with the hook through the turn and pull it down.

3. Pull the knot tight, leaving the hook held at the end of the rope.

CAUTION
Tie both knots the same way, so the two ropes end up the same length.

PARTS FOR THIS STEP

1× Seat ref. 281002	**2×** Hook ref. 287605



How it looks at the end of step 1

2 STEP 2 OF 4
Hang it on the support



A Hooks on the support (not included)

Hook both **hooks** onto a suitable, sturdy support (a swing beam, a beam or a proper frame). The support is **not included**.

The two suspension points must be **45 cm to 65 cm** apart.

The seat must be **35 cm to 60 cm above the ground**.

CAUTION
Do not hang it on tree branches, clothes lines or wires. Keep the swing at least 2 m from any structure or obstacle.



How it looks at the end of step 2

3 STEP 3 OF 4
Level the seat



C Lower knot (under the seat)

D Seat tilt

Look at the swing from the side. Line up the ropes and check the tilt of the seat relative to the ground: it should look like the picture.

If needed, move the **lower knots** of the ropes, under the seat, up or down until the tilt is right.

This makes sure the swing's center of gravity is set correctly.



How it looks at the end of step 3

STEP 4 OF 4

4 Check before use




A Hook knots

C Lower knots

The adult who installed the swing must check the **upper knots** (hooks) and the **lower knots** and put their own weight on the seat, to make sure everything is in perfect condition.

Also check the safety lock and the **seat belt**: it must always be buckled and adjusted to the child during use.

CAUTION
Never leave the child on the swing without the seat belt or without adult supervision.

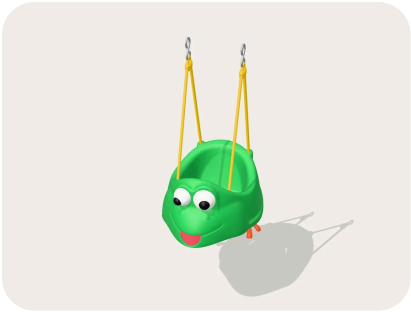

How it looks at the end of step 4




Assembly complete

Check the product visually, making sure every part is fitted and firmly fastened. **Only then let children use it.**

Maximum weight 23 kg. Check the upper and lower knots and the seat height (35 to 60 cm above the ground), and always use the seat belt.

INSTALLATION DETAILS

Location and safety area

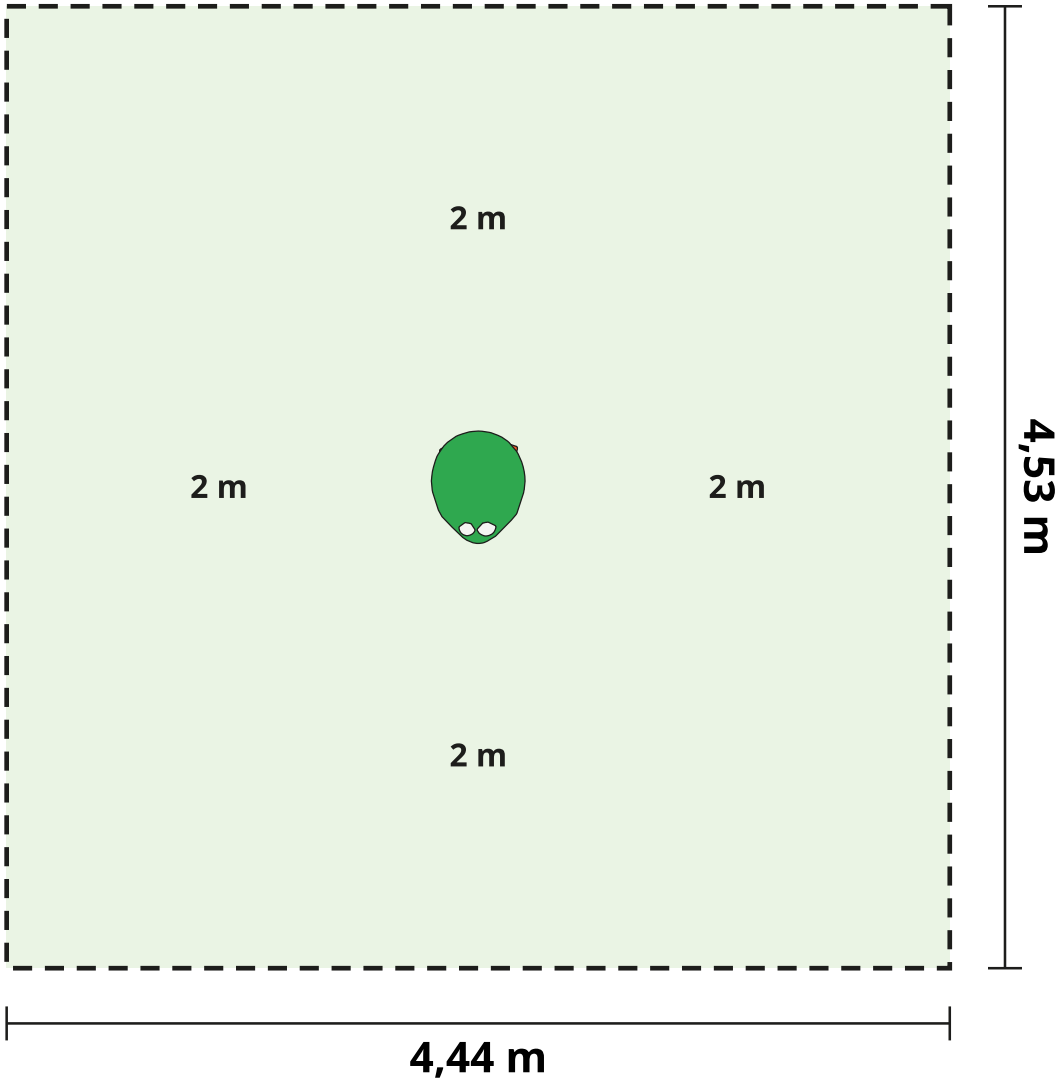

Free area around the swing (top view): at least 2 m from any structure or obstacle, 4.44 × 4.53 m.
Seat size: 0.44 × 0.53 m.

To keep users safe, minimum spaces and free distances must be respected.

Circulation area: at least 1.20 m wide around the equipment, so users can run freely; at least 1.50 m where the path changes direction, so strollers and wheelchairs can get in and turn.

Ground: an even, continuous, stable surface that is non-slip in any weather, with no obstacles and a cross slope of no more than 2%. Use on grass, sand, carpet or another soft, level surface.

Location: first check for chemicals and loose material (rubble, sharp objects). Choose an airy place with morning sun, sheltered from drafts; do not install it in basements or garages. Never use it near stairs, roads, swimming pools, water or slippery places. If the area is fenced, the gates must open outwards and be at least 1 m wide.

Free space: install the swing at least 2 m from any structure or obstruction, such as a house, garage, fences, overhanging branches, clothes lines or electric wires. Keep at least 50 cm from anything else.

Height and suspension: the seat must be 35 cm to 60 cm above the ground; the suspension points must be 45 cm to 65 cm apart.

Ground under the swing: do not install it over concrete, asphalt or any other hard surface.

Install the swing in an airy place that gets the morning sun. Avoid drafty areas. Do not install it in basements or garages.

To avoid accidents, the child should wear shoes. This product is not intended for commercial use.

INSPECTION AND MAINTENANCE

Keep the swing safe

Visual inspection — daily

- Cleanliness
- Free distances between the ground and the equipment
- Ground surface finish and exposed foundations
- Sharp edges and missing components
- Excessive wear and structural integrity

Operational inspection — every 1 to 3 months

Pay special attention to the structural integrity of the product, besides the items of the visual inspection.

Main inspection — yearly

- Structure: bending, deformation and cracks
- Finish: cracks, chips, broken or open joints
- Missing, bent, broken, loose or worn parts
- Edges, pinch points, access points and protective surfaces
- Upper and lower rope knots, hooks, seat and ropes: tighten the knots and replace any part that shows wear
- Lubricate the moving metal parts (hooks)

Maintenance

- Tighten the joining parts and clean (do not use paints, solvents or other chemicals)
- Keep the free spaces and drain holes clean
- Replace fasteners and faulty or worn parts

As per NBR 16071-7:2012. Any change that affects safety only after consulting the manufacturer.

XALINGO S/A INDÚSTRIA E COMÉRCIO
BR 471, km 147 – Santa Cruz do Sul – RS – Brasil – CEP 96835-642
CNPJ 95.425.534/0001-76

SAC
(51) 3719-9800 · sac@xalingo.com.br
www.xalingo.com.br

Balanço New Biu · ref. 0281.0
Keep this manual for future reference.