Casinha Malukete

ref. 0978.7



ASSEMBLY INSTRUCTIONS

Assembly video on YouTube:
youtu.be/w3i5SgxTyhY

Product size: **4 ft × 3 ft 5 in × 4 ft 4 in (1.23 × 1.03 × 1.31 m)**
Playhouse with a quirky look, with chalkboards inside and outside, tic-tac-toe, dots and boxes and the crazy calculator
Chalk not included
Rotomolded polyethylene walls and roof
Age: 2 years and up
To be assembled by an adult; a second person makes it easier to fit the walls and the roof.
4 steps · keep this manual for future reference.

BEFORE YOU START

Read carefully

Caution

Give this toy to the child only after it has been **assembled by an adult**, and always use it under **adult supervision**.

Assembly rules

- Follow this order: the **left side wall** and the **right side wall** on the **front wall**, then the **back wall** and the **roof**.
- The side wall hooks go into the slots with the side wall slightly off the ground and then slide down: if the wall does not go down, lift it and fit it again.
- Assemble on level ground: on uneven ground the tabs will not line up.

Tools

- No tools needed: all parts snap together

Assembly uses no screws.

PARTS LIST

Casinha Malukete parts



FRONT WALL (A) 1×
No. 1 · ref. 978701



LEFT SIDE WALL (B) 1×
No. 2 · ref. 978704



RIGHT SIDE WALL (C) 1×
No. 3 · ref. 978703



BACK WALL (D) 1×
No. 4 · ref. 978702



ROOF (E) 1×
No. 5 · ref. 978705

PRODUCT ASSEMBLY

Step by step

In each step, the arrows show where the part goes, the **black numbers** give the order and the **yellow letters** point to the details explained under the picture.

1 STEP 1 OF 4
Left side wall on the front wall



A Front wall (A)

B Left side wall (B)



The side wall hooks go into the slots of the front wall and slide down

A Side wall hook

Lay out the parts: the **front wall (A)**, the green wall with the arch, the yellow **left side wall (B)**, the blue **right side wall (C)** with the chalkboards, the red **back wall (D)** with the round window, and the **roof (E)**.

Stand front wall A upright. Hold side wall B slightly off the ground (about 2 cm, 3/4 in), with the hooks at its end level with the slots of the front wall.

Push the side wall against the front wall until the hooks go into the slots, then lower it to the ground: the hooks lock. The walls are curved, so a little pressure may be needed.

CAUTION
The walls are large: with a second person holding them, fitting is easier and the wall will not tip over.


PARTS FOR THIS STEP



1× Front wall (A)
ref. 978701



1× Left side wall (B)
ref. 978704

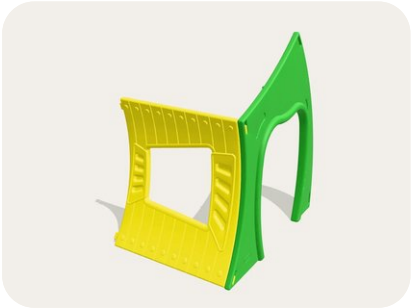


How it looks at the end of step 1

STEP 2 OF 4

2 Right side wall on the front wall



C Right side wall (C)

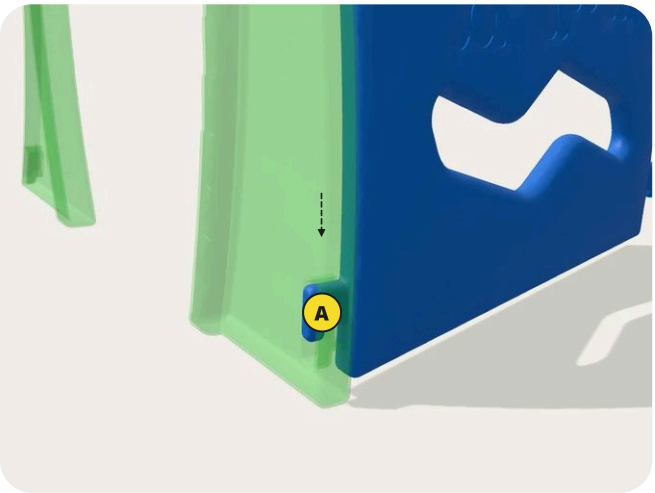

The side wall hooks go into the slots of the front wall and slide down

A Side wall hook

On the other side of the front wall, fit the **right side wall (C)** the same way: slightly off the ground, push the hooks into the slots of the front wall and lower the side wall.

The chalkboards of side wall C face both the outside and the inside of the playhouse.

PARTS FOR THIS STEP



1× Right side wall (C)
ref. 978703



How it looks at the end of step 2

STEP 3 OF 4

3 Back wall



D Back wall (D)


Bring the **back wall (D)** against the rear ends of both side walls and push until it fits on both.

Check that the four walls are fully engaged and resting on the ground.

PARTS FOR THIS STEP




1× Back wall (D)
ref. 978702

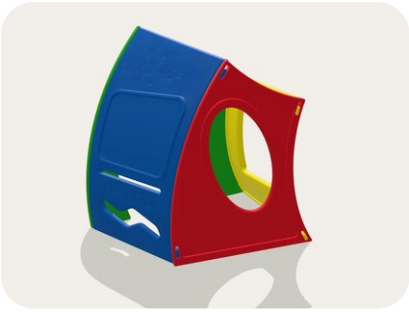


How it looks at the end of step 3

STEP 4 OF 4

4 Roof

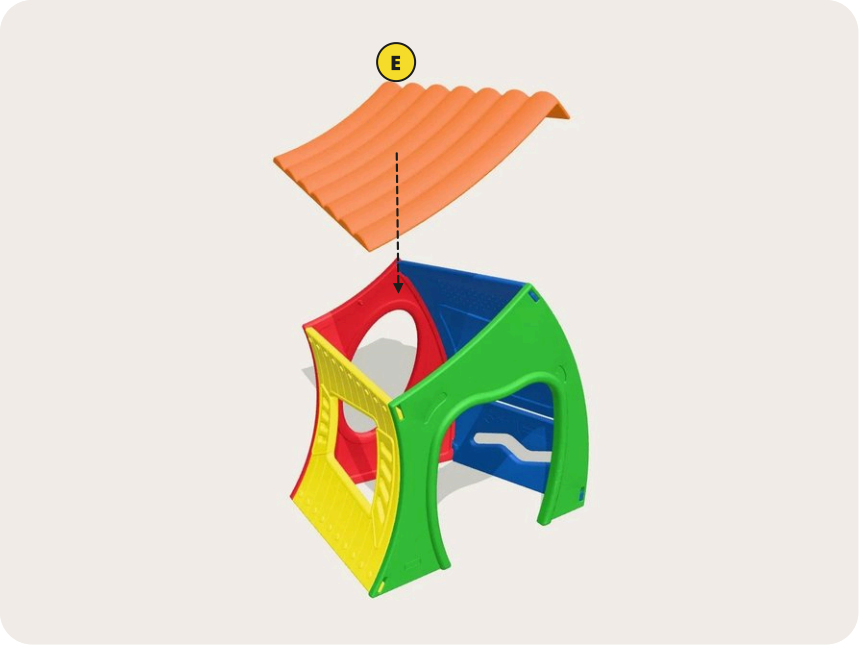

E Roof (E)

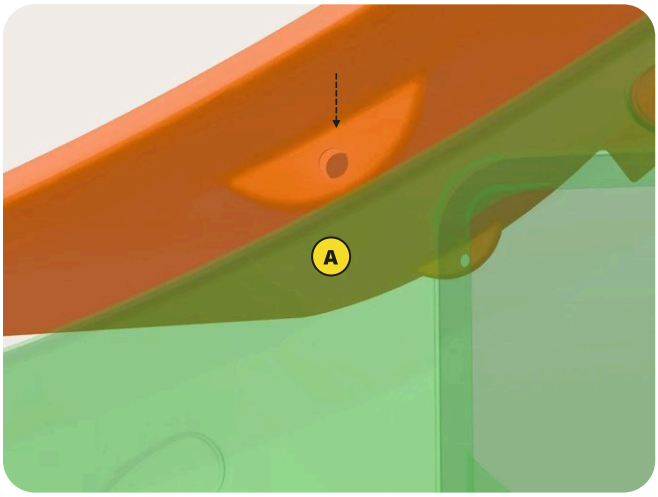

The front wall pin goes into the hole in the roof flange

A Front wall pin

Place the **roof (E)** on the playhouse, with its low side over the yellow left side wall (B) and the curled end of the tiles on the side of the right side wall (C).

Lower the roof straight down: the two flanges under the roof go down inside the front and back walls, and the round pin of each wall snaps into the hole of its flange (click). The roof sits on the walls.

CAUTION
The roof is large: put it on with a second person, one on each side.

PARTS FOR THIS STEP




1× Roof (E)
ref. 978705



How it looks at the end of step 4


FASTENING DETAILS

How each part is held

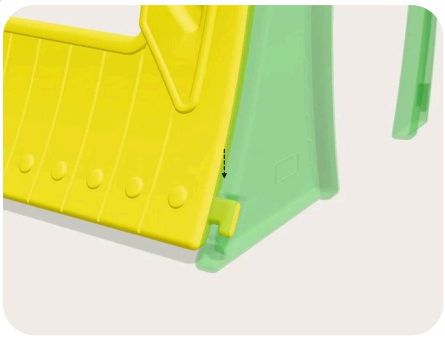

Walls

The hooks at the ends of the side walls go into the slots of the front wall with the side wall slightly off the ground and slide down until they lock; the back wall fits on the other ends of the side walls.

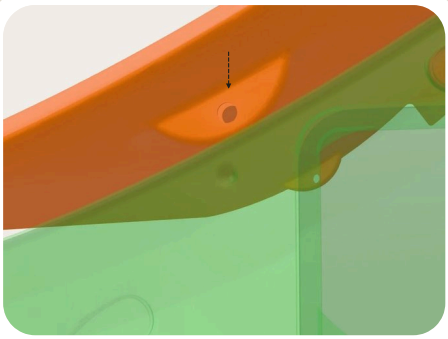

Roof

Goes straight down onto the playhouse: the pins on the inner face of the front and back walls go into the holes of the roof flanges.




Assembly complete

Check the product visually, making sure every part is fitted and firmly fastened. **Only then let children use it.**

Check that the four walls are fully engaged and the roof is seated on top of the walls.

INSTALLATION DETAILS

Location and safety area

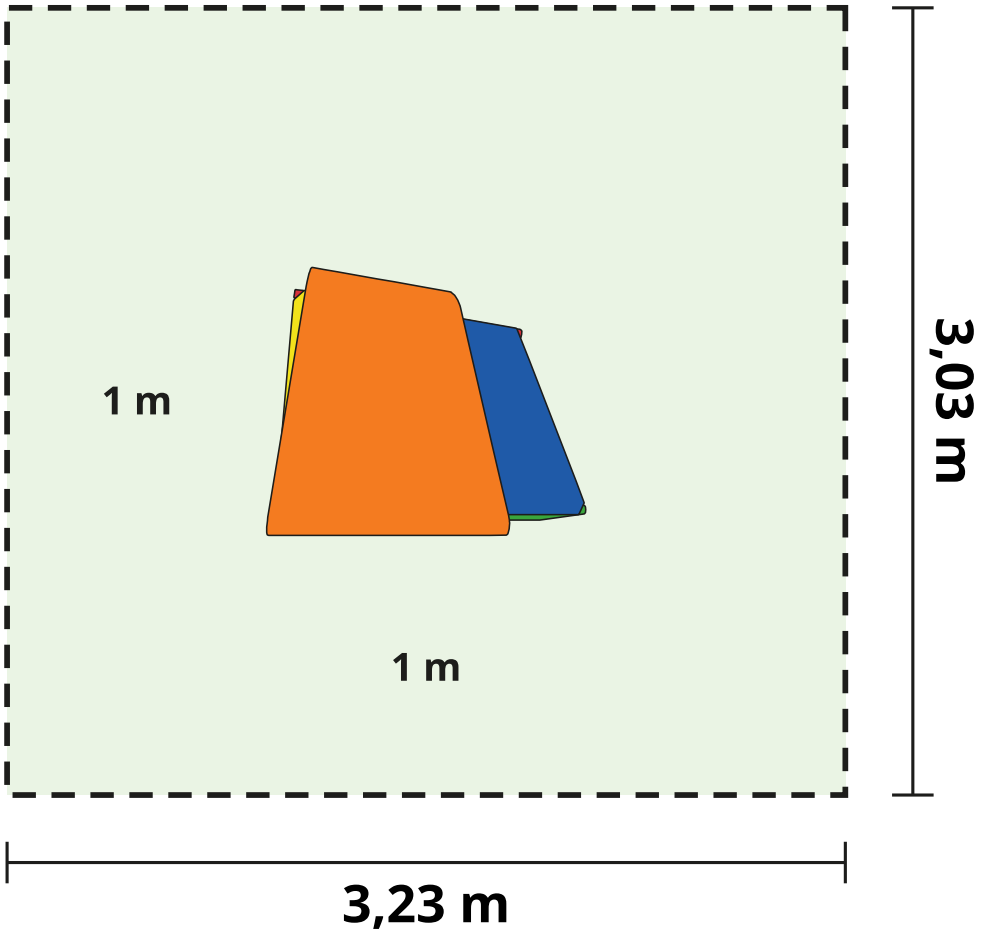

Area reserved for installation (top view): 1 m (3 ft 3 in) of free space around the playhouse, 3.23 × 3.03 m. Product size: 1.23 × 1.03 × 1.31 m.

To keep users safe, minimum spaces and free distances must be respected.

Circulation area: at least 1.20 m wide around the equipment, so users can run freely; at least 1.50 m where the path changes direction, so strollers and wheelchairs can get in and turn.

Ground: an even, continuous, stable surface that is non-slip in any weather, with no obstacles and a cross slope of no more than 2%. Use on grass, sand, carpet or another soft, level surface.

Location: first check for chemicals and loose material (rubble, sharp objects). Choose an airy place with morning sun, sheltered from drafts; do not install it in basements or garages. Never use it near stairs, roads, swimming pools, water or slippery places. If the area is fenced, the gates must open outwards and be at least 1 m wide.

Footprint: the assembled playhouse takes up about 1.23 × 1.03 m (4 ft × 3 ft 5 in) on the ground, roof included; keep 1 m (3 ft 3 in) of free space around it, as in the figure.

To avoid accidents, the child should wear shoes. This product is not intended for commercial use.

INSPECTION AND MAINTENANCE

Keep the playhouse safe

Visual inspection — daily

- Cleanliness
- Free distances between the ground and the equipment
- Ground surface finish and exposed foundations
- Sharp edges and missing components
- Excessive wear and structural integrity

Operational inspection — every 1 to 3 months

Pay special attention to the structural integrity of the product, besides the items of the visual inspection.

Main inspection — yearly

- Structure: bending, deformation and cracks
- Finish: cracks, chips, broken or open joints
- Missing, bent, broken, loose or worn parts
- Edges, pinch points, access points and protective surfaces
- Walls fully engaged and roof seated

Maintenance

- Tighten the joining parts and clean (do not use paints, solvents or other chemicals)
- Keep the free spaces and drain holes clean
- Replace fasteners and faulty or worn parts

As per NBR 16071-7:2012. Any change that affects safety only after consulting the manufacturer.

XALINGO S/A INDÚSTRIA E COMÉRCIO
BR 471, km 147 – Santa Cruz do Sul – RS – Brasil – CEP 96835-642
CNPJ 95.425.534/0001-76

SAC
(51) 3719-9800 · sac@xalingo.com.br
www.xalingo.com.br

Casinha Malukete · ref. 0978.7
Keep this manual for future reference.