Trenzinho da Alegria

ref. 0959.8



ASSEMBLY INSTRUCTIONS

Assembly video on YouTube:
youtu.be/jWRkWarWqyI

Product size: **2.12 × 0.86 × 1.22 m**
Train-shaped tunnel: front, 3 cars and rear; children play inside and on top
The cars can be set in a straight line or in a curve
Maximum weight: 50 kg on each car ·
Age: 3 years and up
To be assembled by an adult, with a 10 mm wrench.
6 steps · keep this manual for future reference.

BEFORE YOU START

Read carefully

Caution

Give this toy to the child only after it has been **assembled by an adult**, and always use it under **adult supervision**.

Assembly rules

- Assemble in this order: the **cowcatcher** on the front, the **3 cars**, the **rear** and the other **cowcatcher**.
- Each car goes in tilted and turns until it sits against the piece in front; then the 2 screws go in from below.
- Assemble on level ground; to reach the screws, lift the front piece a little.


Tools

- **10 mm open-end or combination wrench**: M6×45 screws (8 pcs, steps 2–5)

There are no specific tightening torques for the fasteners. The rivet nuts come already fitted in the parts.

Screws in this playground

Each type has its own color. The same card appears in each step and in the assembly video.

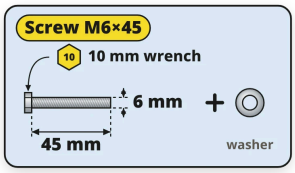

8× Screw M6×45 · steps 2–5

PARTS LIST

Trenzinho da Alegria parts



COWCATCHER (A) 2×
No. 1 · ref. 959804



FRONT (B) 1×
No. 2 · ref. 959801



BLUE CAR (C) 1×
No. 3 · ref. 959806



RED CAR (C) 1×
No. 4 · ref. 959803



GREEN CAR (C) 1×
No. 5 · ref. 959807



REAR (D) 1×
No. 6 · ref. 959802



M6×45 SCREW 8×
No. 7 · ref. 2090194



M8 WASHER 8×
No. 8 · ref. 2090185

PRODUCT ASSEMBLY

Step by step

In each step, the arrows show where the part goes, the **black numbers** give the order and the **yellow letters** point to the details explained under the picture.

---

1 STEP 1 OF 6
Cowcatcher on the front



A Front (B)

B Cowcatcher (A)

The 3 cars have the same shape and so do the 2 cowcatchers: there is no fixed order between them.

Fit a **cowcatcher (A)** under the **front (B)**, on the outside.

PARTS FOR THIS STEP



1× Front (B)
ref. 959801




1× Cowcatcher (A)
ref. 959804




How it looks at the end of step 1

STEP 2 OF 6

2 Blue car

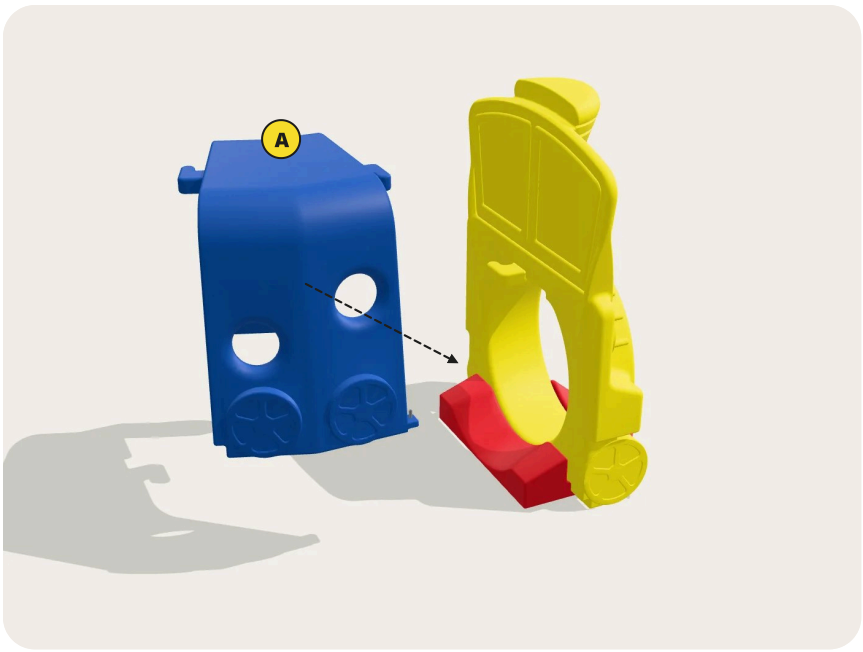

A Blue car (C)

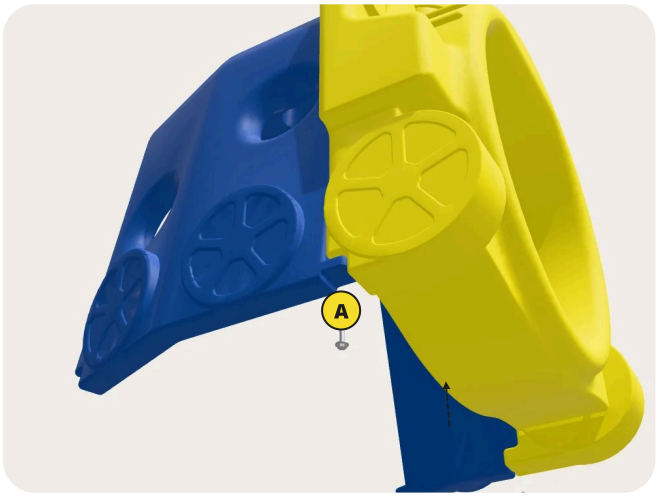

Screw with washer, from below, at each joint

A Washer + M6×45 screw, from below

Fit the **blue car (C)** behind the front: bring the car in tilted and turn it until it sits against the front.

From below, put an **M6×45 screw with a washer** into each of the 2 holes of the joint and tighten it into the rivet nut of the piece above (10 mm wrench). To reach them, lift the front piece a little.

CAUTION
Snap in the side pins. To take them apart, press the cars from the outside in.

PARTS FOR THIS STEP



1× Blue car (C)
ref. 959806




2× M6×45 screw
ref. 2090194




2× Washer
one on each screw

SCREW AND TOOL




Tool: **10 mm wrench.**

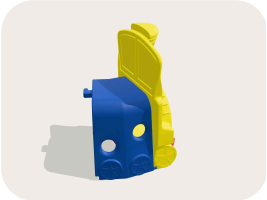

How it looks at the end of step 2


STEP 3 OF 6

3 Red car

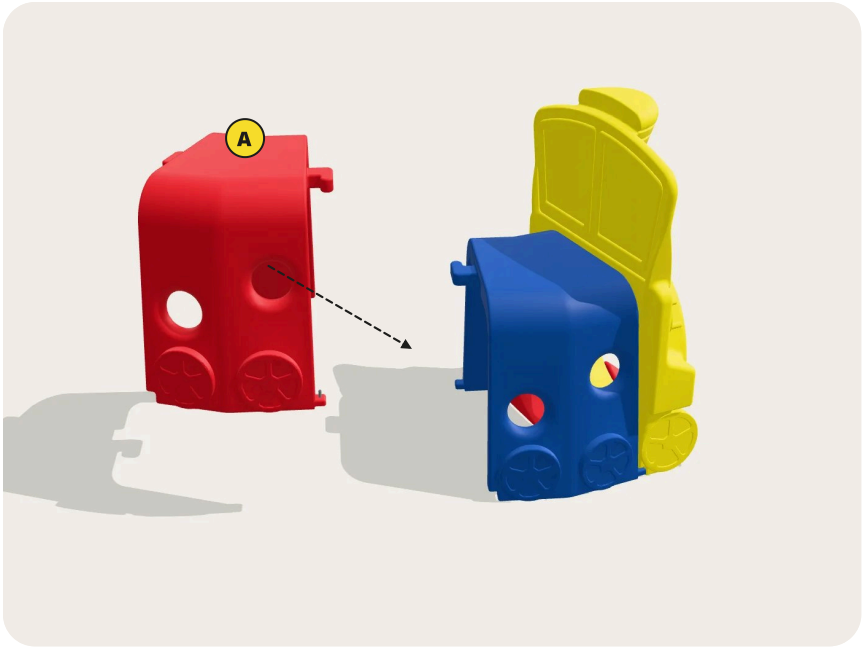

A Red car (C)

SCREW AND TOOL

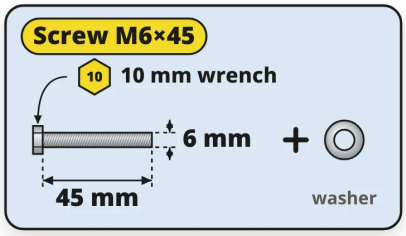

Tool: **10 mm wrench**.

Fit the **red car (C)** behind the blue one the same way: tilted, turning it until it sits.

From below, put an **M6×45 screw with a washer** into each of the 2 holes of the joint and tighten it into the rivet nut of the piece above (10 mm wrench). To reach them, lift the front piece a little.

PARTS FOR THIS STEP



1× Red car (C)
ref. 959803



2× M6×45 screw
ref. 2090194




2× Washer
one on each screw



How it looks at the end of step 3


STEP 4 OF 6

4 Green car

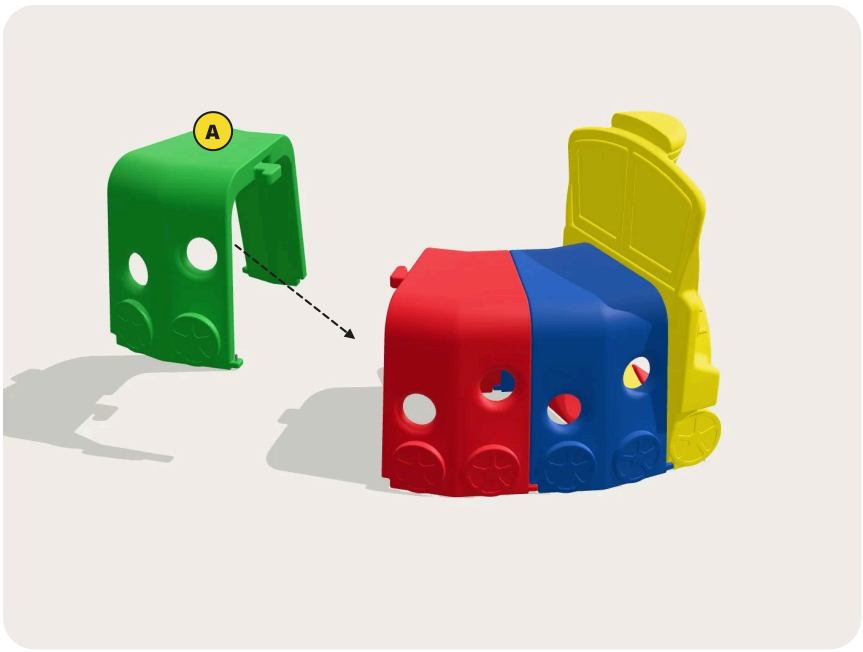

A Green car (C)

SCREW AND TOOL

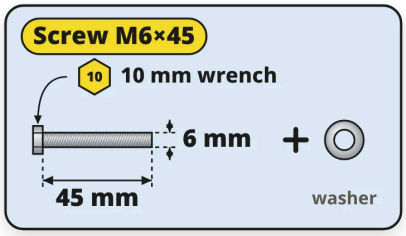

Tool: **10 mm wrench**.

Fit the **green car (C)** behind the red one the same way.

From below, put an **M6×45 screw with a washer** into each of the 2 holes of the joint and tighten it into the rivet nut of the piece above (10 mm wrench). To reach them, lift the front piece a little.

PARTS FOR THIS STEP

- **1×** Green car (C) ref. 959807
- **2×** M6×45 screw ref. 2090194
- **2×** Washer one on each screw



How it looks at the end of step 4


STEP 5 OF 6

5 Rear



A Rear (D)

SCREW AND TOOL

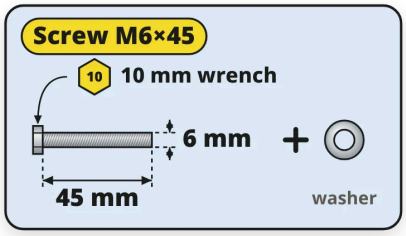

Tool: **10 mm wrench**.

Close the train with the **rear (D)**, fitted behind the last car.

From below, put an **M6×45 screw with a washer** into each of the 2 holes of the joint and tighten it into the rivet nut of the piece above (10 mm wrench). To reach them, lift the front piece a little.

PARTS FOR THIS STEP



1× Rear (D)
ref. 959802



2× M6×45 screw
ref. 2090194



2× Washer
one on each screw



How it looks at the end of step 5

STEP 6 OF 6

6 Cowcatcher on the rear



A Cowcatcher (A)

B Rear (D)

Fit the other **cowcatcher (A)** under the rear, lifting the assembled set a little.

The cars can be set in a curve, as here, or in a straight line.

PARTS FOR THIS STEP



1× Cowcatcher (A) ref. 959804



How it looks at the end of step 6

FASTENING DETAILS

How each part is held



Car joints

2 M6×45 screws with washer at each joint, from below, into the rivet nut of the piece above.



Cowcatchers

Fitted under the front and the rear.




Assembly complete

Check the product visually, making sure every part is fitted and firmly fastened. **Only then let children use it.**

Maximum weight 50 kg on each car. Check that the 8 screws are tight, that the side pins are snapped in and that the 2 cowcatchers are in place.

INSTALLATION DETAILS

Location and safety area

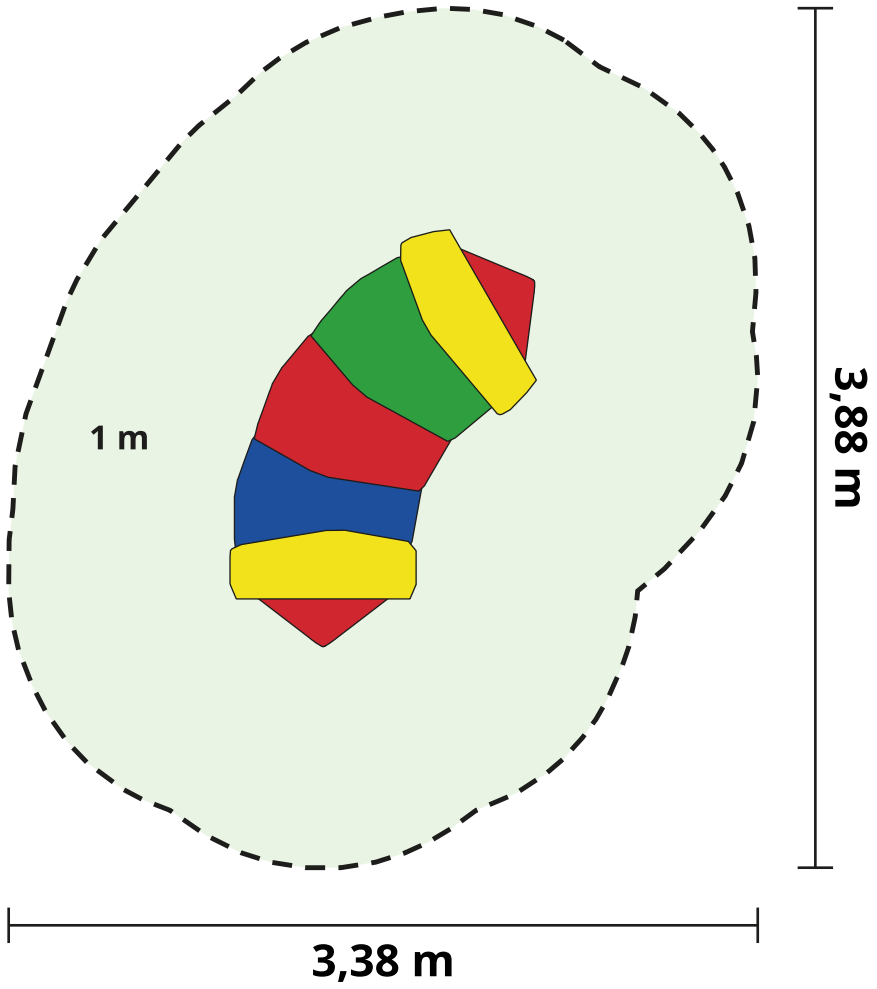

Area reserved for installation (top view, set in a curve): 1 m clear around it, 3.38 × 3.88 m. In a straight line, the train measures 2.12 × 0.86 × 1.22 m.

To keep users safe, minimum spaces and free distances must be respected.

Circulation area: at least 1.20 m wide around the equipment, so users can run freely; at least 1.50 m where the path changes direction, so strollers and wheelchairs can get in and turn.

Fall space: neighboring static equipment with overlapping fall spaces must be at least 1.50 m apart for a fall height of up to 600 mm, and 2.50 m for higher falls. Maximum fall height of this product: **680 mm**.

Ground: an even, continuous, stable surface that is non-slip in any weather, with no obstacles and a cross slope of no more than 2%. Use on grass, sand, carpet or another soft, level surface.

Location: first check for chemicals and loose material (rubble, sharp objects). Choose an airy place with morning sun, sheltered from drafts; do not install it in basements or garages. Never use it near stairs, roads, swimming pools, water or slippery places. If the area is fenced, the gates must open outwards and be at least 1 m wide.

Footprint: in a straight line the train takes up about 2.12 × 0.86 m on the ground; in a curve, as in the figure, about 1.88 × 1.38 m. Keep 1 m clear around it.

To avoid accidents, the child should wear shoes. This product is not intended for commercial use.

INSPECTION AND MAINTENANCE

Keep the playground safe

Visual inspection — daily

- Cleanliness
- Free distances between the ground and the equipment
- Ground surface finish and exposed foundations
- Sharp edges and missing components
- Excessive wear and structural integrity

Operational inspection — every 1 to 3 months

Pay special attention to the structural integrity of the product, besides the items of the visual inspection.

Main inspection — yearly

- Structure: bending, deformation and cracks
- Finish: cracks, chips, broken or open joints
- Missing, bent, broken, loose or worn parts
- Edges, pinch points, access points and protective surfaces
- Joint screws tight, side pins snapped in and cowcatchers in place

Maintenance

- Tighten the joining parts and clean (do not use paints, solvents or other chemicals)
- Keep the free spaces and drain holes clean
- Replace fasteners and faulty or worn parts

As per NBR 16071-7:2012. Any change that affects safety only after consulting the manufacturer.

XALINGO S/A INDÚSTRIA E COMÉRCIO
BR 471, km 147 – Santa Cruz do Sul – RS – Brasil – CEP 96835-642
CNPJ 95.425.534/0001-76

SAC
(51) 3719-9800 · sac@xalingo.com.br
www.xalingo.com.br

Trenzinho da Alegria · ref. 0959.8
Keep this manual for future reference.