
Castelo Medieval

ref. 0970.9

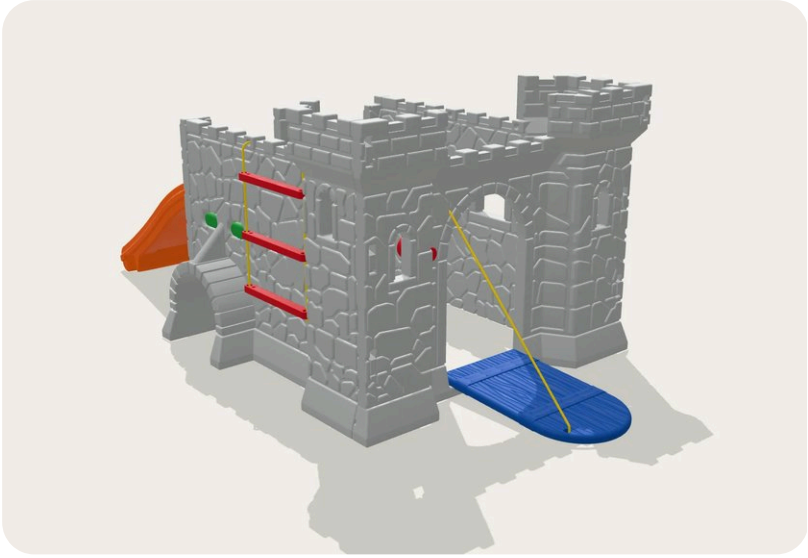

ASSEMBLY INSTRUCTIONS

Assembly video on YouTube:
youtu.be/DubYoRxJZEk

Product size: **1,73 × 3,50 × 1,32 m**
Castle with towers, a drawbridge with crank, tunnel, platform with a hideout underneath, slide and rope ladder
Size with the drawbridge open and the slide
Age: 3 years and up
Assembly by an adult; a second person makes fitting the walls easier.
5 steps · keep this manual for future reference.

BEFORE YOU START

Read carefully

Caution

Give this toy to the child only after it has been **assembled by an adult**, and always use it under **adult supervision**.

Assembly rules

- The **front (A)** comes with the drawbridge, the crank and the drawbridge rope already fitted.
- Assemble in this order: the **sides**, the **platform**, the **back**, the **slide** and last the **rope ladder**.
- Each wall locks with a **click**: if you do not hear it, lift the part and fit it again.
- Assemble on level ground: on uneven ground the joints do not line up.

Tools

- No tools needed: every part snaps together and the ropes are tied by hand

This playground has no screws.

PARTS LIST

Castelo Medieval parts



FRONT (A) 1×
No. 1 · ref. 970902



SIDE WITHOUT TUNNEL (B) 1×
No. 2 · ref. 970903



SIDE WITH TUNNEL (C) 1×
No. 3 · ref. 970908



BACK (D) 1×
No. 4 · ref. 970901



PLATFORM (E) 1×
No. 5 · ref. 947604



SLIDE (F) 1×
No. 6 · ref. 947605




ROPE, 1.6 m (G) 2×
No. 7 · ref. 970912



ROPE LADDER RUNG (H) 3×
No. 8 · ref. 953203



DRAWBRIDGE (already fitted on the front A) 1×
No. 9 · ref. 970904




DRAWBRIDGE CRANK (already fitted on the front A) 1×
No. 10 · ref. 970905

PRODUCT ASSEMBLY

Step by step

In each step, the arrows show where the part goes, the **black numbers** give the order and the **yellow letters** point to the details explained under the picture.


1 STEP 1 OF 5
Sides on the front

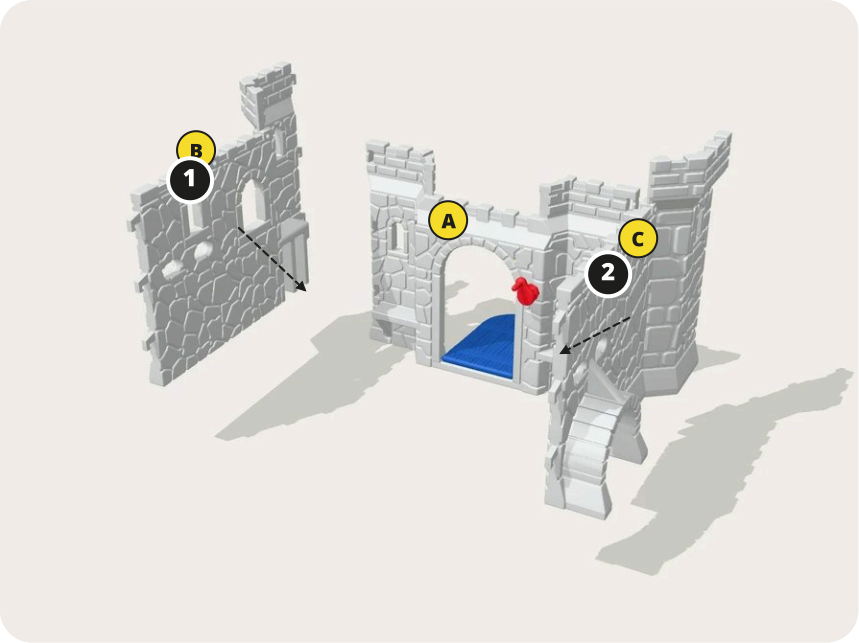

A Front (A): the part with the drawbridge

B Side without tunnel (B)

C Side with tunnel (C)

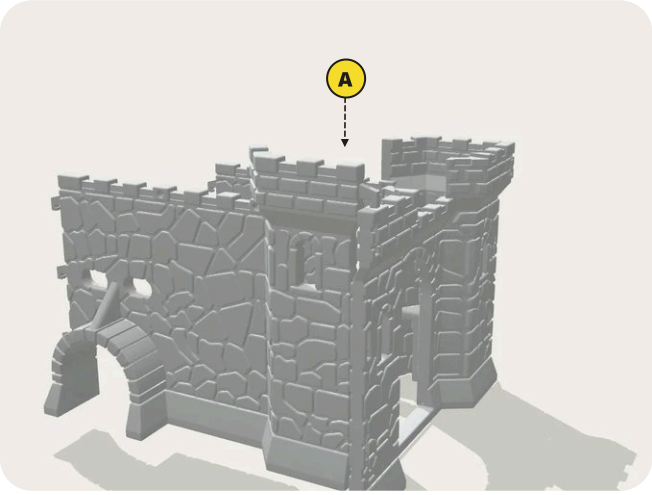

Click at the top of the tower

A Press down here until it clicks

Set out the **front (A)**, which comes with the drawbridge and the crank already on, and the two sides: the **side without tunnel (B)** and the **side with tunnel (C)**, which has the little stairway and the tunnel arch on the outside.

Fit sides B and C onto the towers of the front: line up the side's hooks with the front's slots and lower the side.

Press the side **down from the top of the tower until you hear a click**: both parts end up flush at the top of the tower. Repeat with the other side.

CAUTION
The walls are large: with a second person holding them, fitting is easier.

> Looking at the castle from the front, the side with tunnel (C) is on the left.

PARTS FOR THIS STEP




1× Front (A)
ref. 970902



1× Side without tunnel (B)
ref. 970903




1× Side with tunnel (C)
ref. 970908

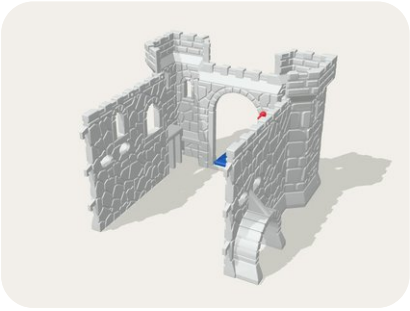

How it looks at the end of step 1

2 STEP 2 OF 5
Platform

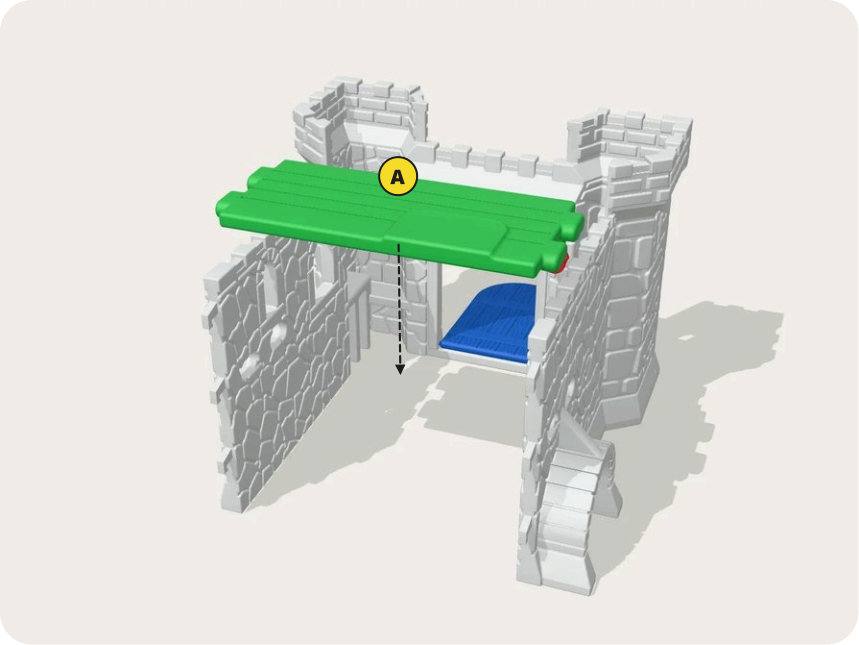

A Platform (E): its tabs go into sides B and C


Fit the **green platform (E)** between sides B and C, on the side opposite the front: the tabs at the ends of the platform go into the slots of the sides.

The hideout is underneath the platform.

PARTS FOR THIS STEP




1× Platform (E)
ref. 947604

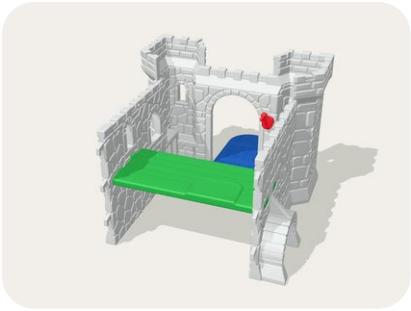

How it looks at the end of step 2

3 STEP 3 OF 5
Back

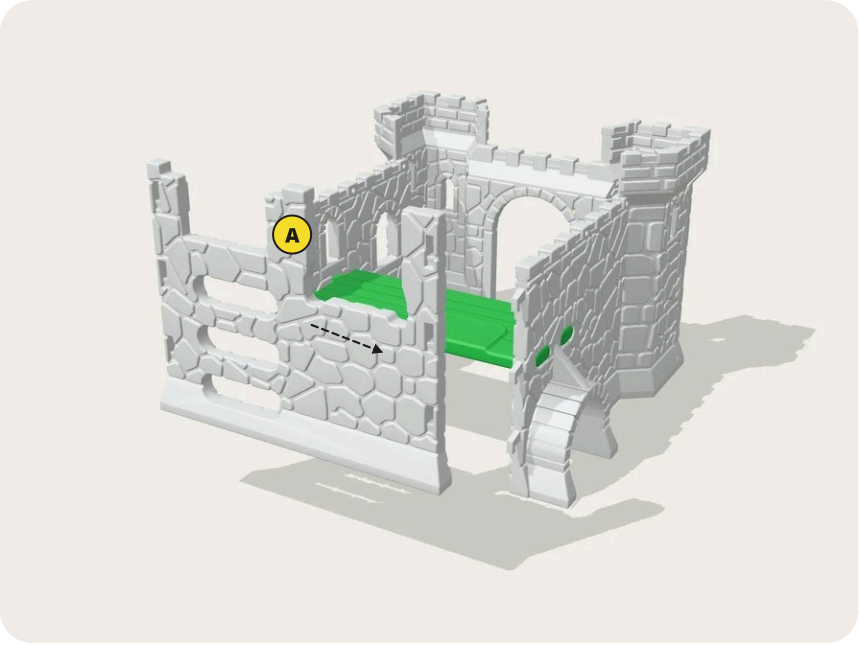

A Back (D): fits onto sides B and C

Fit the **back (D)** onto sides B and C, closing the castle behind the platform.

Press the sides **down from the top until you hear a click**: both parts end up flush at the top. Repeat on the other side.

PARTS FOR THIS STEP




1× Back (D)
ref. 970901




How it looks at the end of step 3

STEP 4 OF 5

4 Slide

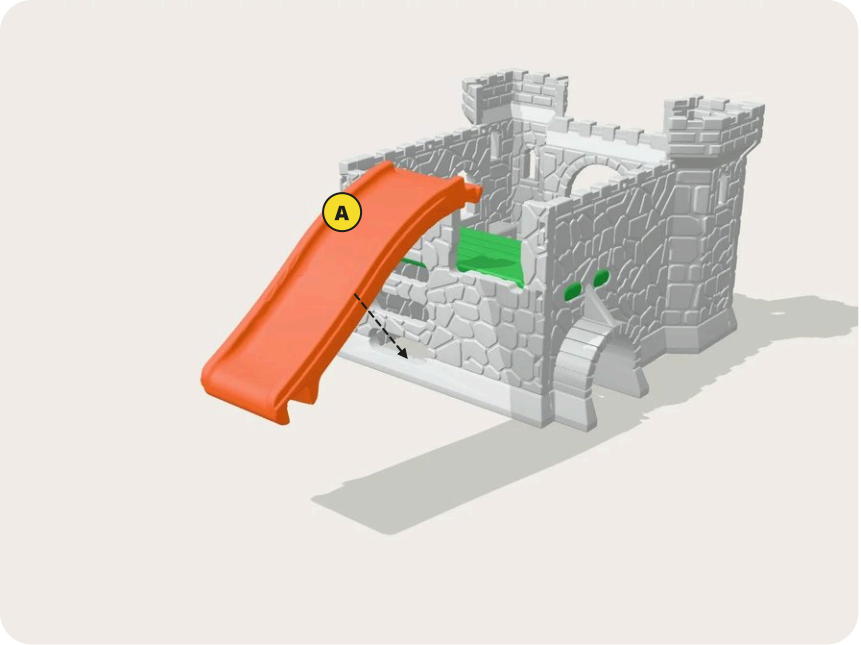

A Slide (F): hooks on the back (D) and rests on the platform (E)

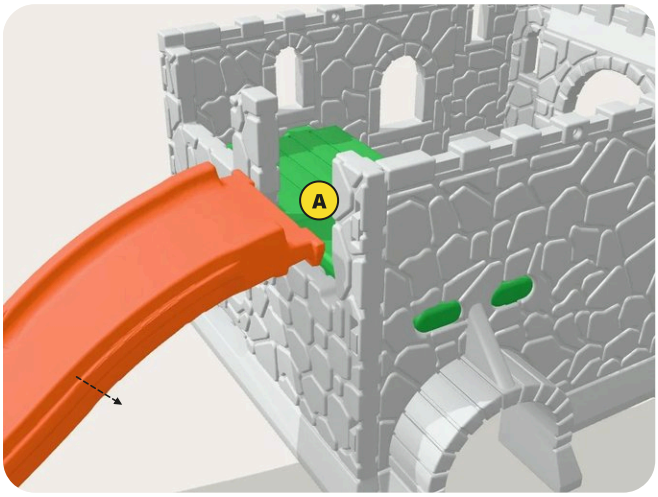

Slide end in its slot on the back

A The top end of the slide drops into its slot on the back


Tilt the **slide (F)** and lower its top end until it sits in its slot on the back (D).

Then lower the slide until it is level with the platform (E).

PARTS FOR THIS STEP



1× Slide (F)
ref. 947605

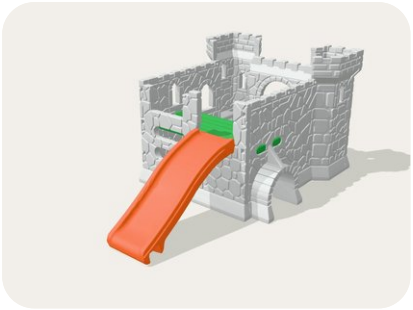


How it looks at the end of step 4

STEP 5 OF 5

5 Rope ladder



A Rope ladder: 2 ropes (G) and 3 rungs (H)

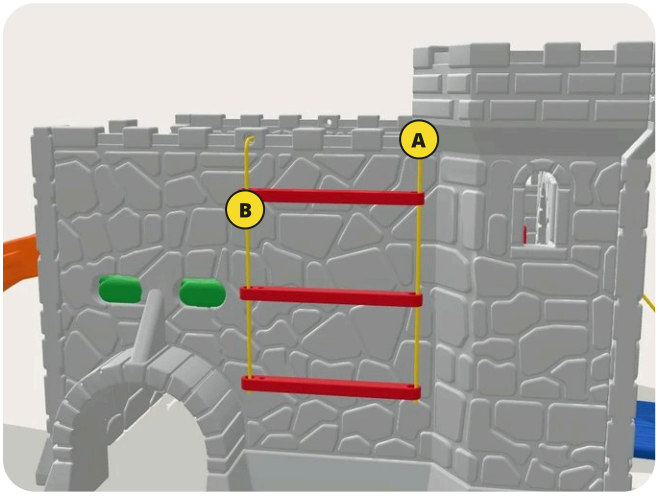

Rope through the hole at the top of the side, knots at the rungs

A The rope goes through the hole at the top of side C; the knot stays inside

B A knot under each rung (H)

Tie a knot at one end of each of the **2 ropes (G)**.

Pass the other end through one of the **holes at the top of side C**, from the inside of the castle to the outside: the knot stays inside and holds the rope.

Thread the rope through the hole of one of the **rungs (H)** and tie a knot under it, still loose. Do the same with the other two rungs, then with the other rope, at the other end of the rungs.

Set the height of the rungs, about 27 cm apart, and pull all the knots tight.

CAUTION
Check the knots before letting children play: the rungs must not slip on the ropes.

PARTS FOR THIS STEP



3× Rope ladder rung (H)
ref. 953203




2× Rope, 1.6 m (G)
ref. 970912



How it looks at the end of step 5


FASTENING DETAILS

How each part is held

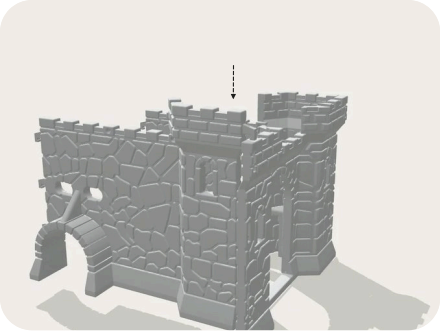


Walls

The sides fit onto the towers of the front and the back fits onto the sides. Press down at the top until it clicks.

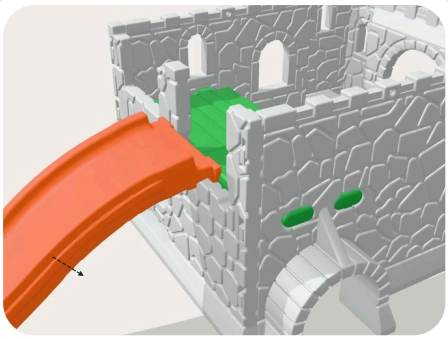

Slide

The top end drops into its slot on the back and the slide rests on the platform.

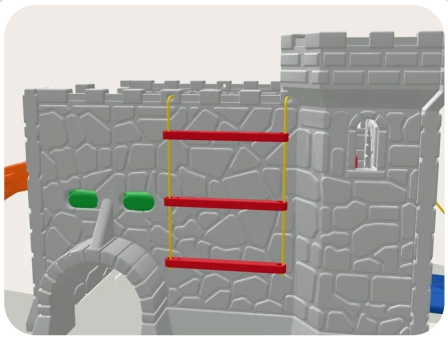


Rope ladder

Two ropes through the holes at the top of side C, knotted inside, and a knot under each of the 3 rungs.



Drawbridge

Comes already fitted on the front (A): the rope links the drawbridge to the crank, inside the castle.

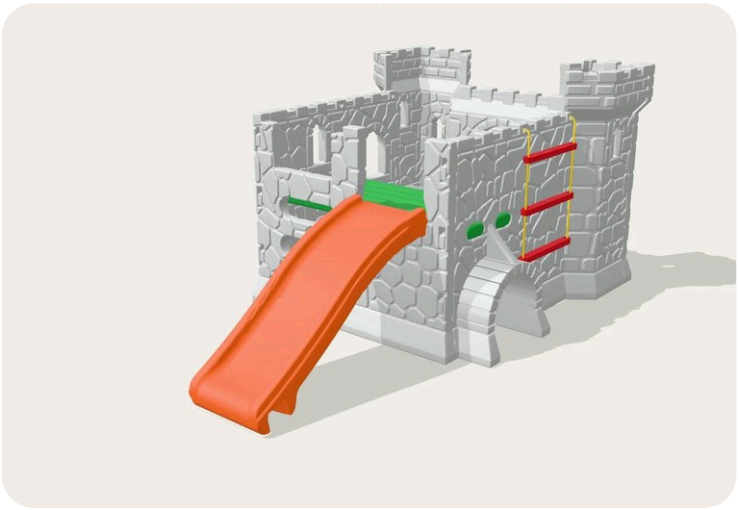

Assembly complete

Check the product visually, making sure every part is fitted and firmly fastened. **Only then let children use it.**

Maximum weight 100 kg per platform. Check that the walls are locked at the top of the towers and that the rope ladder knots are tight.

INSTALLATION DETAILS

Location and safety area

To keep users safe, minimum spaces and free distances must be respected.

Circulation area: at least 1.20 m wide around the equipment, so users can run freely; at least 1.50 m where the path changes direction, so strollers and wheelchairs can get in and turn.

Fall space: neighboring static equipment with overlapping fall spaces must be at least 1.50 m apart for a fall height of up to 600 mm, and 2.50 m for higher falls. Maximum fall height of this product: **665 mm**.

Slide landing area: at least 1000 mm from the sides of the run-out section and 2000 mm (type 01 run-out) or 1000 mm (type 02 run-out) from the end of the run-out section.

Ground: an even, continuous, stable surface that is non-slip in any weather, with no obstacles and a cross slope of no more than 2%. Use on grass, sand, carpet or another soft, level surface.

Location: first check for chemicals and loose material (rubble, sharp objects). Choose an airy place with morning sun, sheltered from drafts; do not install it in basements or garages. Never use it near stairs, roads, swimming pools, water or slippery places. If the area is fenced, the gates must open outwards and be at least 1 m wide.

Footprint: the assembled castle takes up about 1.7 × 3.5 m on the ground, counting the open drawbridge at the front and the slide at the back; the free areas above apply all around it.

To avoid accidents, the child should wear shoes. This product is not intended for commercial use.

INSPECTION AND MAINTENANCE

Keep the playground safe

Visual inspection — daily

- Cleanliness
- Free distances between the ground and the equipment
- Ground surface finish and exposed foundations
- Sharp edges and missing components
- Excessive wear and structural integrity

Operational inspection — every 1 to 3 months

Pay special attention to the structural integrity of the product, besides the items of the visual inspection.

Main inspection — yearly

- Structure: bending, deformation and cracks
- Finish: cracks, chips, broken or open joints
- Missing, bent, broken, loose or worn parts
- Edges, pinch points, access points and protective surfaces
- Walls locked at the top of the towers, slide in its slot and rope ladder knots tight

Maintenance

- Tighten the joining parts and clean (do not use paints, solvents or other chemicals)
- Keep the free spaces and drain holes clean
- Replace fasteners and faulty or worn parts

As per NBR 16071-7:2012. Any change that affects safety only after consulting the manufacturer.

XALINGO S/A INDÚSTRIA E COMÉRCIO
BR 471, km 147 – Santa Cruz do Sul – RS – Brasil – CEP 96835-642
CNPJ 95.425.534/0001-76

SAC
(51) 3719-9800 · sac@xalingo.com.br
www.xalingo.com.br

Castelo Medieval · ref. 0970.9
Keep this manual for future reference.