Fun Play

ref. 0999.8

ASSEMBLY INSTRUCTIONS

Assembly video on YouTube:
youtu.be/iW16GHUTiEw



Product size: **3,40 × 3,32 × 2,19 m**
Tower with roof, tunnel slide, curved slide and 2 climbing ramps
Age range: 3 to 8 years
Assembly by an adult — one person can do it alone.
14 steps · keep this manual for future reference.

BEFORE YOU START

Read carefully

Caution

Give this toy to the child only after it has been **assembled by an adult**, and always use it under **adult supervision**.

Assembly rules

- Mind the tube orientation: the **single hole goes at the bottom**, lined up with the hole in the leg, and the **2 holes go at the top**.
- Every screw must go in with a **washer**, for a more even and secure tightening.
- Mind the platform position: the **side without the recess** goes on the tunnel side.
- Walls always with the **rivet nuts facing out**, and always an **EVA spacer** between two walls.
- Ramps and slides are screwed to the platform **from below**.

Tools




- **10 mm open-end or combination wrench**: M6×45 screws (30 pcs, steps 8–12) and M6×90 screws (4 pcs, step 13)
- **2 × 13 mm wrenches** (or a wrench + a 13 mm socket): M8×70 screw with nut (4 sets, step 14). One holds the nut while the other turns the screw.
- Pliers


There are no specific tightening torques for the fasteners. The rivet nuts come already fitted in the parts.

Screws in this playground


Each type has its own color. The same card appears in each step and in the assembly video.



30× Screw M6×45 · steps 8–12

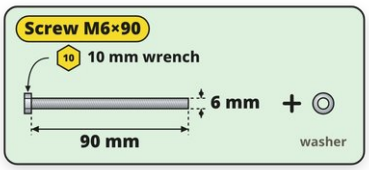

4× Screw M6×90 · step 13

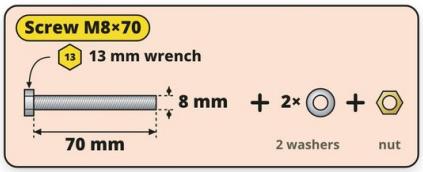

4× Screw M8×70 · step 14

PARTS LIST

Fun Play parts



PLATFORM 1×
No. 1 · ref. 998711



RIVET NUT 8SJN-M6 64×
No. 2 · ref. 2090183 · already fitted



HEX SCREW M6 6×45 mm 33×
No. 3 · ref. 2090194



M8 FLAT WASHER 10×
No. 4 · ref. 2090185



TUNNEL SLIDE 1×
No. 5 · ref. 998702



TUNNEL SLIDE BASE 2×
No. 6 · ref. 998714



WASHER 36×
No. 7 · ref. 2090347



SMALL CROSSBAR 2×
No. 8 · ref. 953203



CLIMBING RAMP 2×
No. 9 · ref. 998704



ROOF 1×
No. 10 · ref. 998705



M8 SELF-LOCKING NUT, YELLOW 4×
No. 11 · ref. 2090323



HEX SCREW M8×70, YELLOW ZINC, FULLY THREADED 4×
No. 12 · ref. 2090329



HEX SCREW M6 6×90 mm 4×
No. 13 · ref. 2090460



ORANGE WALL WITH DOTS 1×
No. 14 · ref. 998706



EVA SEAL 4×
No. 15 · ref. 998728



YELLOW STRIPED WALL 1×
No. 16 · ref. 998707


TUBE 2000 4×
No. 17 · ref. 998712



YELLOW WALL WITH DOTS – FOR THE TUNNEL 1×
No. 18 · ref. 998730



ORANGE STRIPED WALL 1×
No. 19 · ref. 998726



CURVED SLIDE 1×
No. 20 · ref. 998703




LEG 2×
No. 21 · ref. 998708

PRODUCT ASSEMBLY

Step by step

In each step, the arrows show where the part goes, the **black numbers** give the order and the **yellow letters** point to the details explained under the picture.

1 STEP 1 OF 14
Legs, platform and 3 tubes

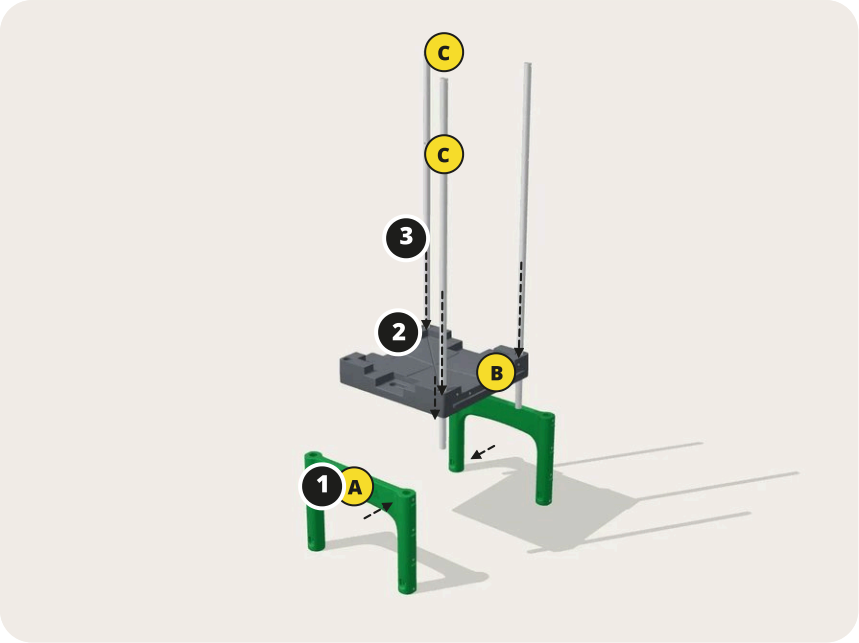

A Legs with the word ENTRADA (entrance) facing out

B Platform side without the recess: tunnel side

C The tube's 2 holes at the top



The tube's bottom hole lined up with the leg

A The tube's bottom hole lined up with the hole in the leg

Place the two legs with the word **ENTRADA (entrance) facing out**.

Set the platform on the legs: the **platform side without the recess goes on the tunnel side**.

Push **3 tubes** through the corners of the platform down to the bottom of the legs. The fourth corner stays without a tube for now.

CAUTION
Tube orientation: the **single hole goes down**, lined up with the hole in the leg, and the **2 holes go up**.

PARTS FOR THIS STEP




2× Leg
ref. 998708



1× Platform
ref. 998711


3× Tube 2000
ref. 998712

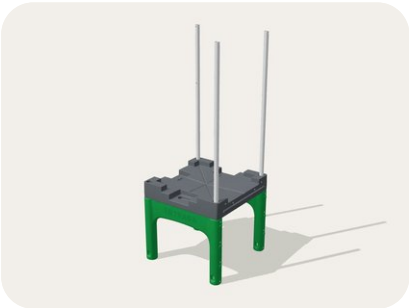

How it looks at the end of step 1

STEP 2 OF 14

2 Identify the walls

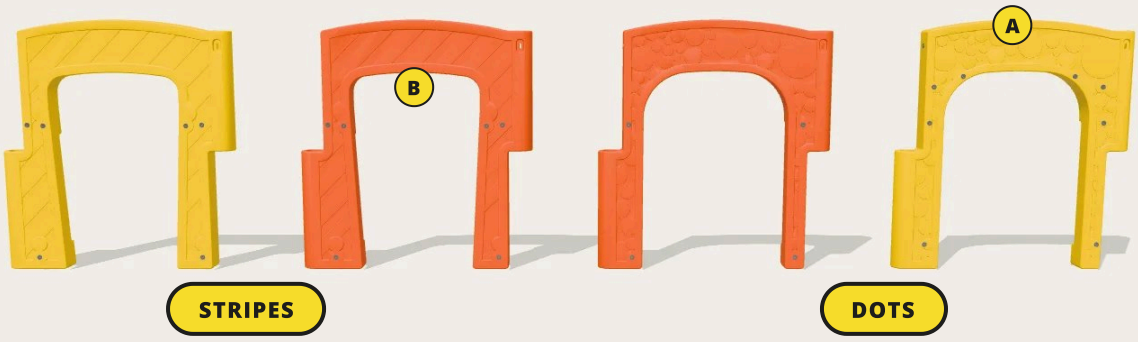

A More rivet nuts: goes on the tunnel side

B Rivet nuts always facing out


There are **two striped walls** and **two walls with dots** (colors may vary with production).

Of the walls with dots, the one with **more rivet nuts** goes on the **tunnel side**.

Where each wall goes: the **orange wall with dots** and the **orange striped wall** on the ramp sides, the **yellow striped wall** on the slide side and the **yellow wall with dots** on the tunnel side.

CAUTION
When fitting the walls, always keep the **rivet nuts facing out**: they hold the ramps, the slide and the tunnel.

3 STEP 3 OF 14
Wall with dots and EVA

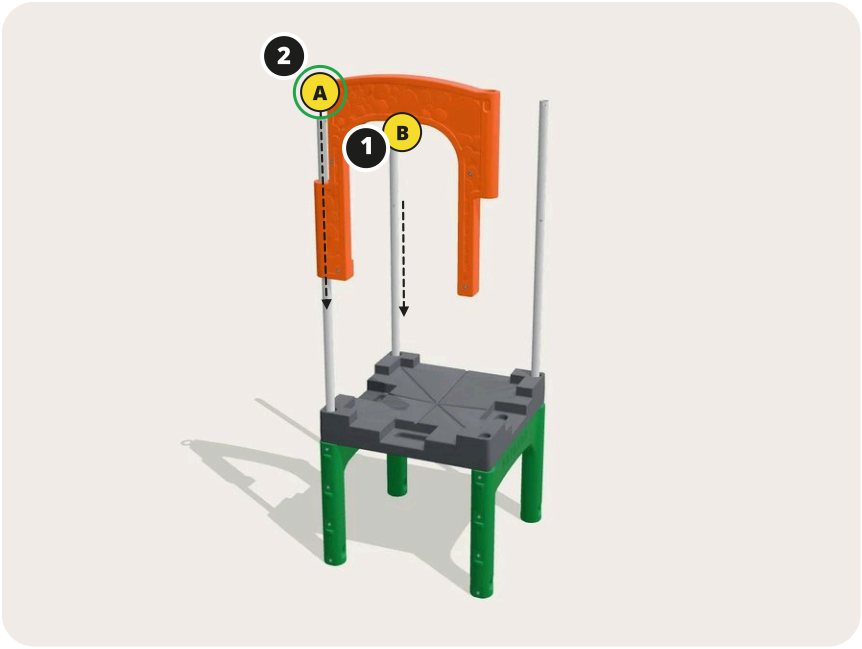

A EVA spacer on top

B Orange wall with dots


Slide the **orange wall with dots** (one of the ramp sides) down the tubes.

Put an **EVA spacer on top**, in the corner where the striped wall will meet it.

PARTS FOR THIS STEP

1× Orange wall with dots
ref. 998706

1× EVA seal (spacer)
ref. 998728

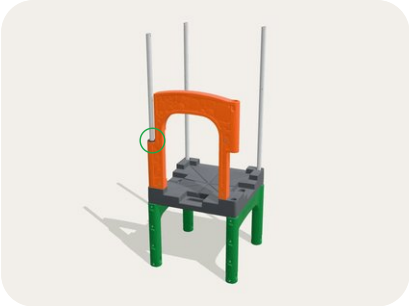

How it looks at the end of step 3

4 STEP 4 OF 14
Striped wall



A The yellow striped wall slides down the tubes

Slide the **yellow striped wall** (slide side) down the tubes, on top of the EVA spacer.

PARTS FOR THIS STEP


1× Yellow striped wall
ref. 998707



How it looks at the end of step 4

STEP 5 OF 14

5 Tunnel-side wall

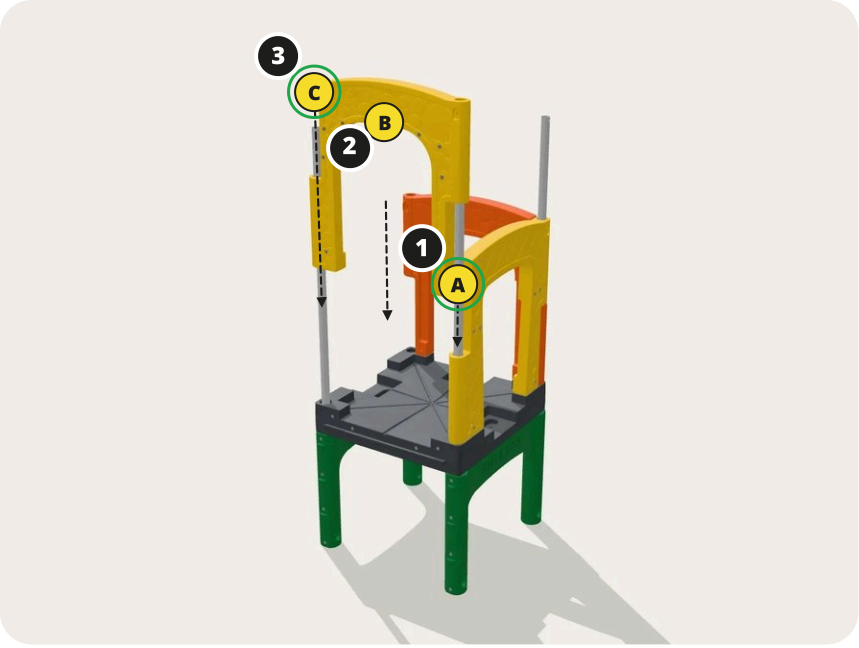

A EVA on top, before the tunnel wall

B Tunnel wall: dots, more rivet nuts

C EVA on top, in the other corner

1. Put an EVA spacer on top of the corner of the striped wall.

2. Fit the **yellow wall with dots**, the one with **more rivet nuts** (tunnel side).

3. Put another EVA spacer on top, in the next corner.

CAUTION
In steps 3 and 5, the EVA spacer goes **on top, before** the wall that closes that corner. The last one (step 7) goes in **from the front**, after the last wall.

PARTS FOR THIS STEP



2× EVA seal (spacer)
ref. 998728




1× Yellow wall with dots (tunnel)
ref. 998730



How it looks at the end of step 5

STEP 6 OF 14

6 Last striped wall

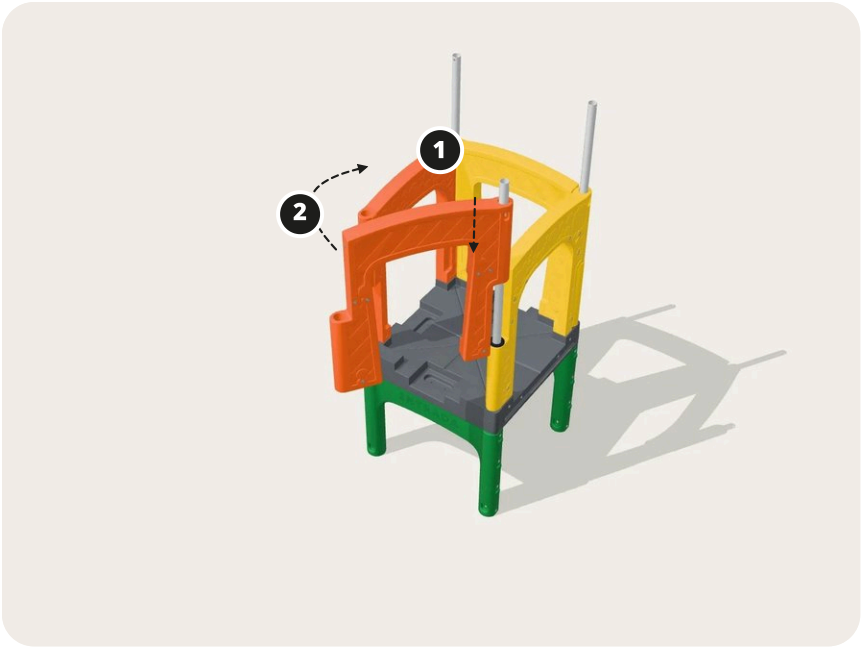

1. Fit the end of the **orange striped wall** (the other ramp side) on the **tube of the corner already built** and lower the wall upright, **swung open to the outside**.

2. With the wall resting on the platform, **swing it around the tube** until the square is closed.

> This wall's other corner still has no tube: it goes in at step 7 and locks the walls.

PARTS FOR THIS STEP


1× Orange striped wall
ref. 998726



How it looks at the end of step 6

STEP 7 OF 14

7 Last EVA and 4th tube

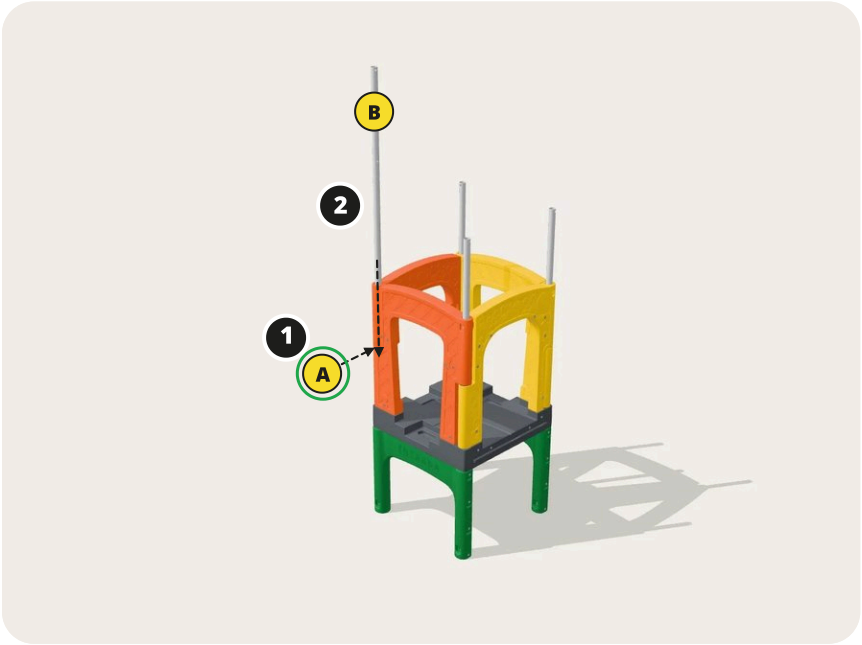

A Last EVA spacer: goes in from the front, flat

B Then lower the last tube: it locks the walls

1. Fit the last EVA spacer **from the front**, flat, in the corner that has no tube yet.

2. Then lower the **4th tube** (single hole down): it goes through the walls and the EVA and locks the whole set.

PARTS FOR THIS STEP

1× Tube 2000
ref. 998712


1× EVA seal (spacer)
ref. 998728



How it looks at the end of step 7


STEP 8 OF 14

8 Ramps

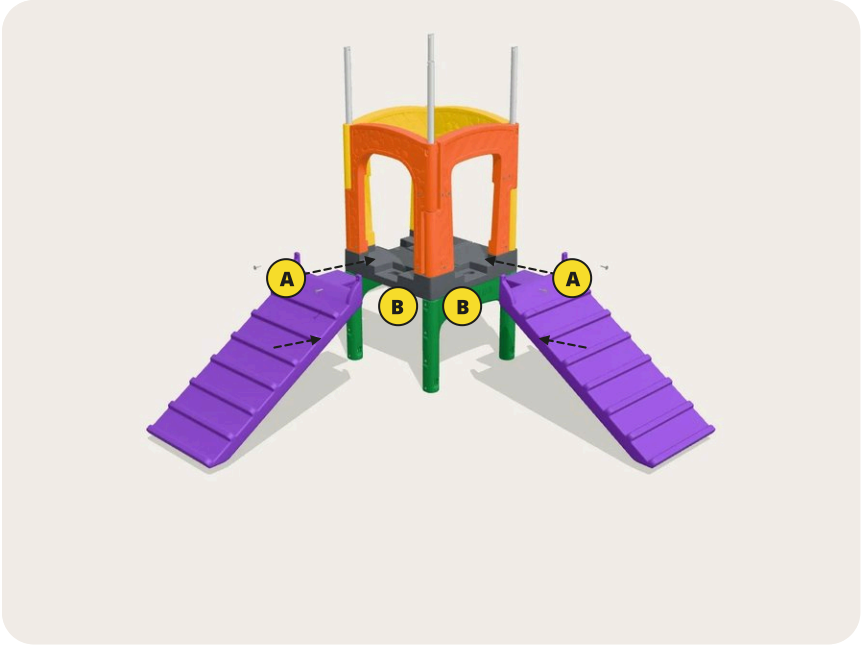

A Each ramp: 2 M6×45 screws in the wall

B 2 screws under the platform, from below

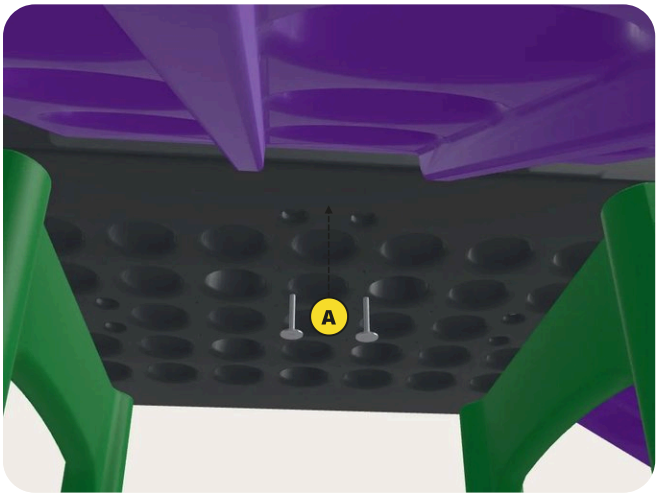

Fastening under the platform

A Under the platform: screw in from below

Fit the **2 ramps**: one on the orange wall with dots and the other on the orange striped wall.

Each ramp takes **4 M6×45 screws with washers**: 2 in the wall, into the rivet nuts, and 2 under the platform (8 in all).

CAUTION
Items fastened to the platform (ramps and slides) must be screwed in **from below**.

PARTS FOR THIS STEP



2× Climbing ramp
ref. 998704




8× M6×45 hex screw
ref. 2090194




8× Washer
one on each screw

SCREW AND TOOL




Tool: **10 mm wrench**.



How it looks at the end of step 8

STEP 9 OF 14


9 Tunnel slide base

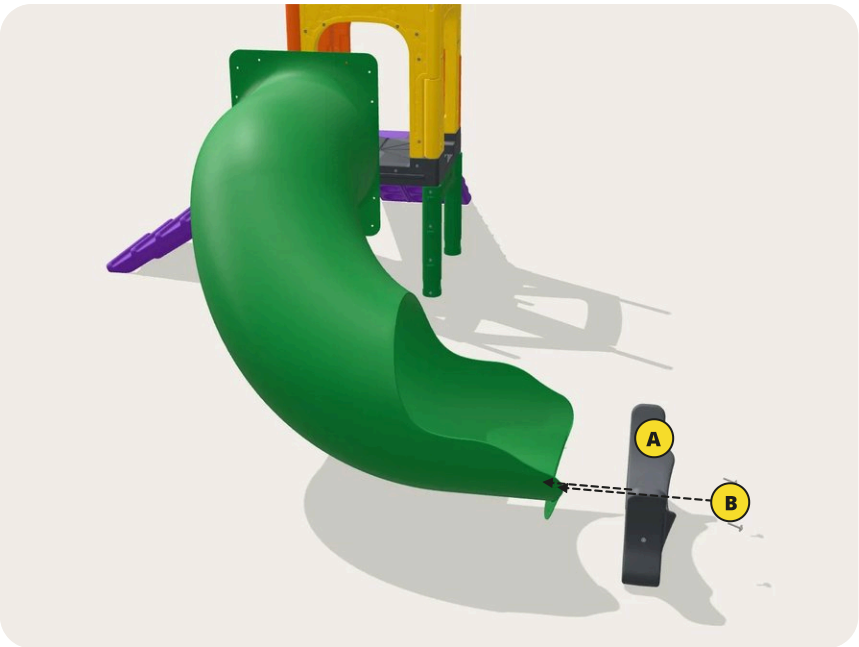

A Base at the front end of the tunnel slide

B 2 M6×45 screws + washer

SCREW AND TOOL

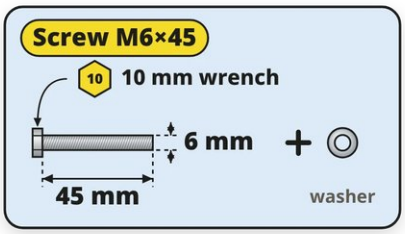

Tool: **10 mm wrench**.

With the tunnel on the ground, fit one of the bases on the **front end** of the slide and screw it on (**2 M6×45 screws with washers**).

> Do steps 9 and 10 with the tunnel next to the playground, before fastening it.

PARTS FOR THIS STEP



1× Tunnel slide
ref. 998702



1× Tunnel slide base
ref. 998714



2× M6×45 hex screw
ref. 2090194




2× Washer
one on each screw



How it looks at the end of step 9

STEP 10 OF 14

10 Second base and small crossbars

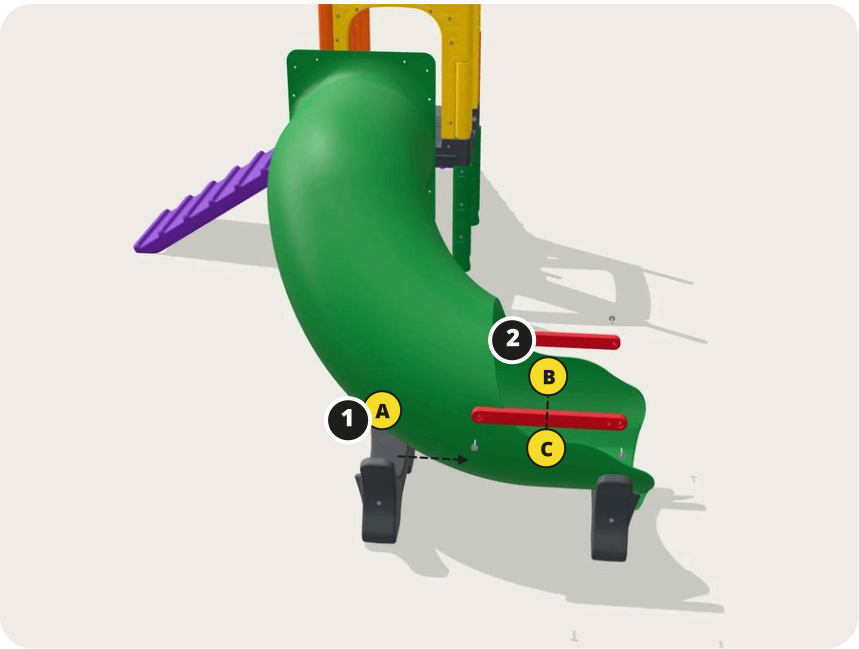


A Second base

B Small crossbars join the two bases

C 4 M6×45 screws + washer

SCREW AND TOOL

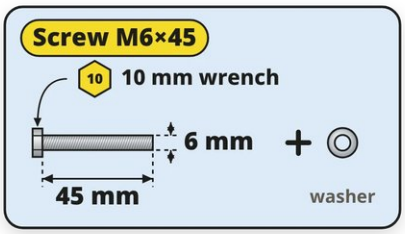

Tool: **10 mm wrench.**

Place the second base and screw on the **small crossbars** to join the two bases (**4 M6×45 screws with washers**).

PARTS FOR THIS STEP

2× Small crossbar ref. 953203

1× Tunnel slide base ref. 998714

4× M6×45 hex screw ref. 2090194


4× Washer one on each screw




How it looks at the end of step 10

STEP 11 OF 14

11 Tunnel slide

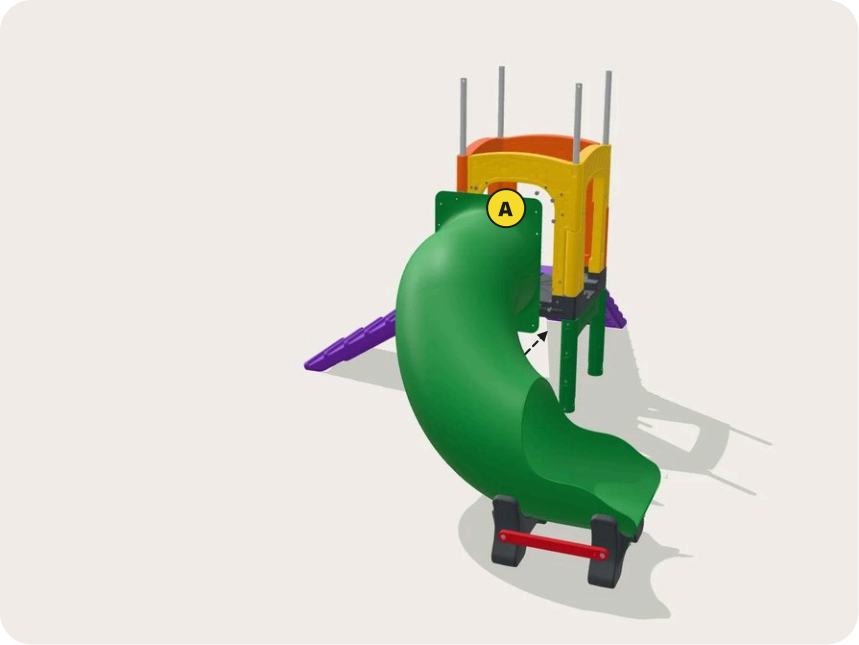

A 12 M6×45 screws around the tunnel mouth

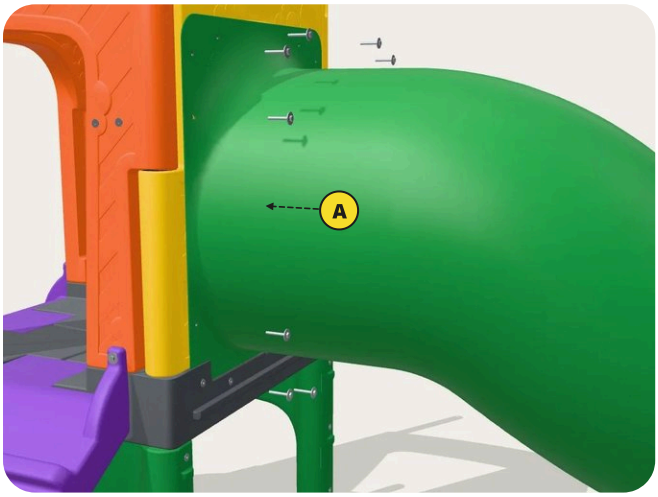

Tunnel mouth screws

A M6×45 screw + washer, from the outside in: 3 at each end of the tunnel mouth

Fit the tunnel slide on the yellow wall with dots and screw it on with **12 M6×45 screws with washers**: 3 at each of the 4 ends of the tunnel mouth, from the outside in, into the rivet nuts of the wall.

PARTS FOR THIS STEP




12× M6×45 hex screw ref. 2090194



12× Washer one on each screw

SCREW AND TOOL




Tool: **10 mm wrench**.



How it looks at the end of step 11


STEP 12 OF 14

12 Curved slide

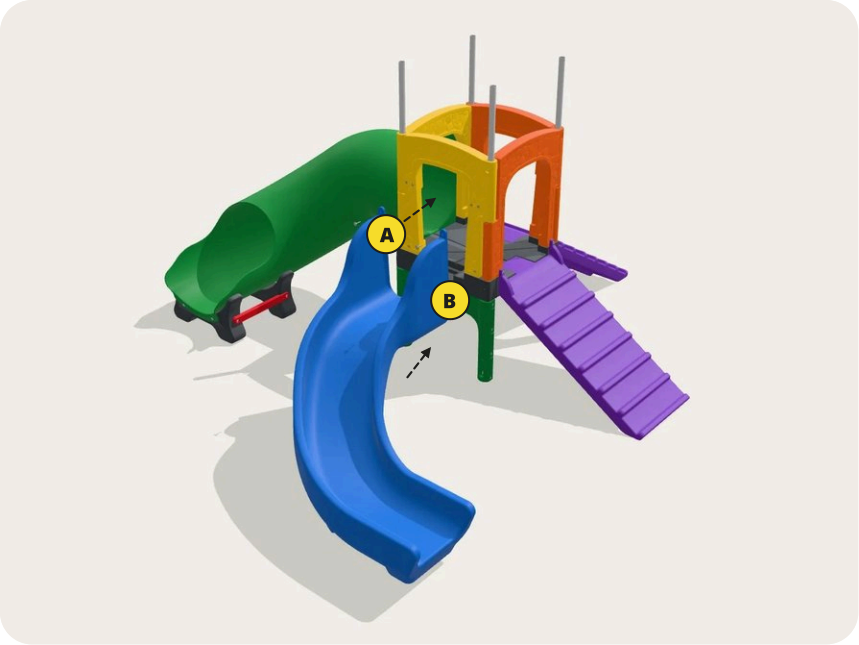

A 2 M6×45 screws in the wall

B 2 screws under the platform, from below

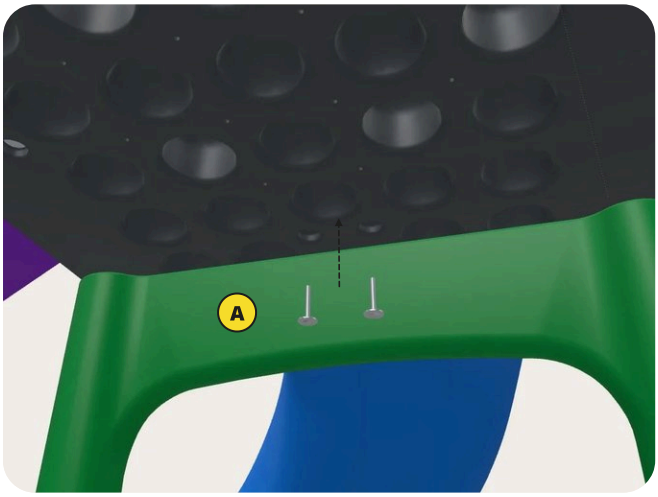

Fastening under the platform

A Under the platform: screw in from below

Fit the curved slide on the yellow striped wall and screw it on with **4 M6×45 screws with washers**.

There are **2 fastening points in the wall** and **2 in the platform**; in the platform, screw in from below.


PARTS FOR THIS STEP

1× Curved slide ref. 998703


4× M6×45 hex screw ref. 2090194

4× Washer one on each screw

SCREW AND TOOL




Tool: **10 mm wrench.**




How it looks at the end of step 12

STEP 13 OF 14

13 Join the walls

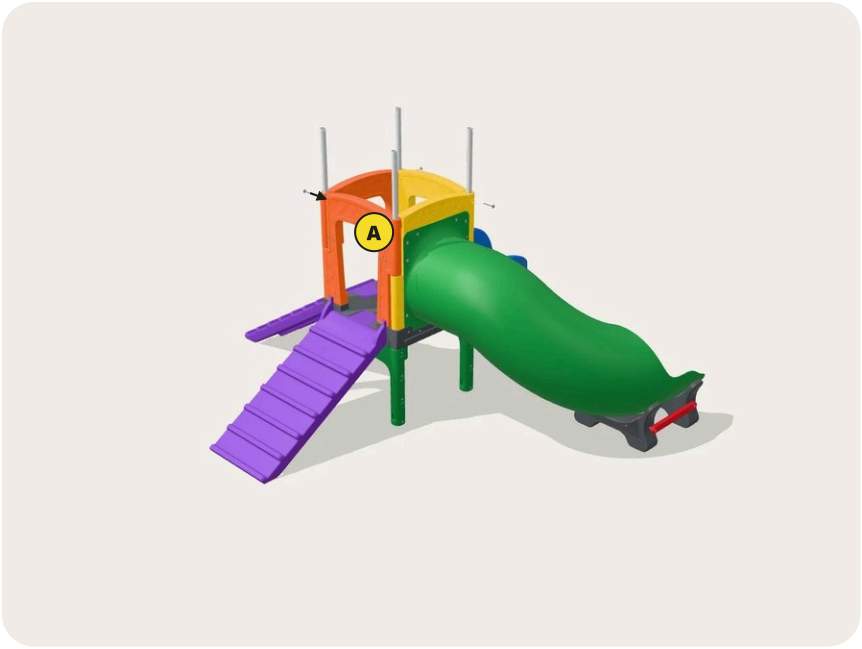

A 4 M6×90 screws go through the tubes (1 in each corner)

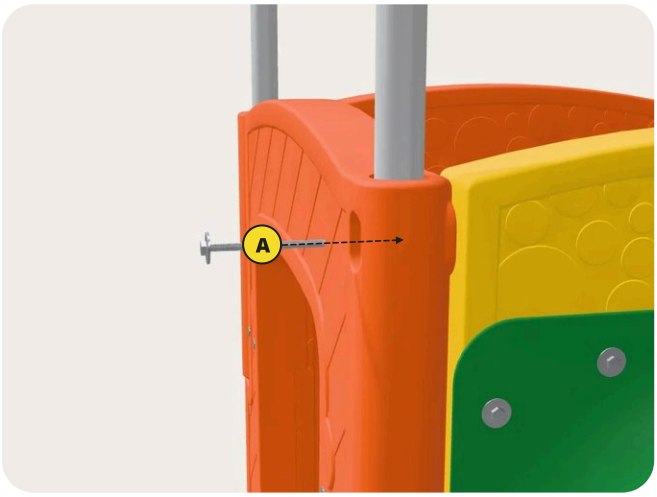

M6×90 screw going through the tube

A M6×90 screw + washer

Join the walls with the longer screws: **4 M6×90 screws with washers**, 1 in each corner, put in **from the outside in**.

The tubes have through holes for the screws.

PARTS FOR THIS STEP




4× Washer
one on each screw



4× M6×90 hex screw
ref. 2090460

SCREW AND TOOL



Tool: **10 mm wrench**.




How it looks at the end of step 13

STEP 14 OF 14

14 Roof



A The roof fits on the 4 tubes

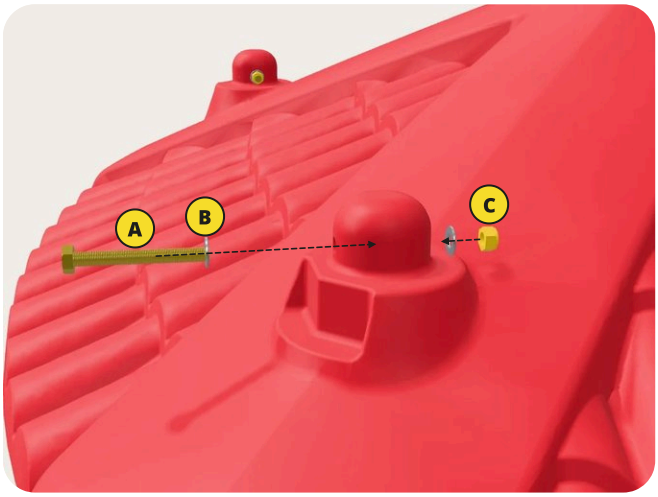

Roof fastening on each tube

A M8×70 screw

B M8 flat washer (on both sides)

C M8 self-locking nut (on the other side)

Place the roof on the 4 tubes.

In each corner, fasten with an **M8×70 screw**, an **M8 flat washer on each side** and an **M8 self-locking nut** (4 sets, 8 washers): the screw goes in with one washer on one side, and the other washer and the nut go on the other side.

PARTS FOR THIS STEP


1× Roof
ref. 998705

8× M8 flat washer
two on each M8×70 screw

4× M8 self-locking nut, yellow
ref. 2090323

4× M8×70 hex screw (fully threaded)
ref. 2090329


SCREW AND TOOL

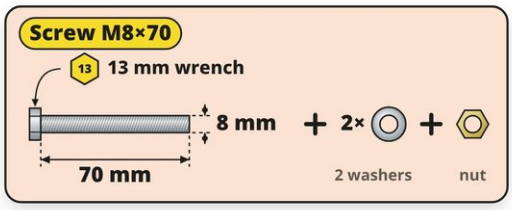

Tool: **2 × 13 mm wrenches**: one holds the nut while the other turns the screw.


FASTENING DETAILS

How each part is screwed on

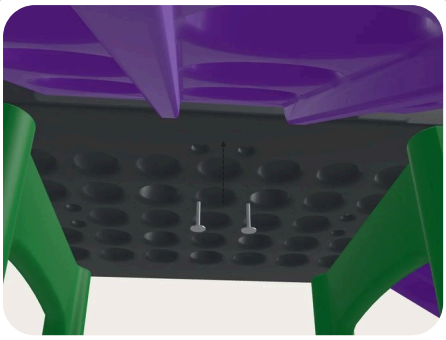


Climbing ramp

M6×45 screw + washer: 2 in the wall, into the rivet nuts, and 2 under the platform, from below.

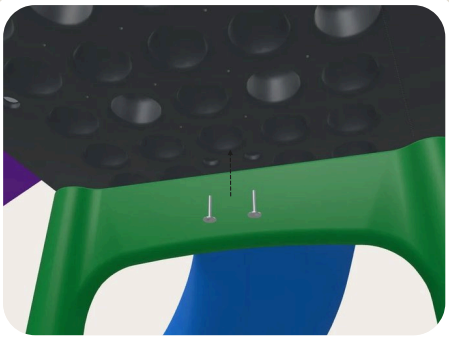

Curved slide

M6×45 screw + washer: 2 in the wall, into the rivet nuts, and 2 under the platform, from below.

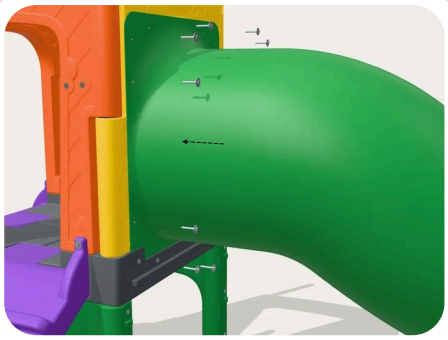


Tunnel slide

M6×45 screw + washer, 3 at each end of the tunnel mouth, into the rivet nuts of the yellow wall with dots.



Wall

M6×90 screw + washer, from the outside in, through both walls and the tube. 1 in each corner.

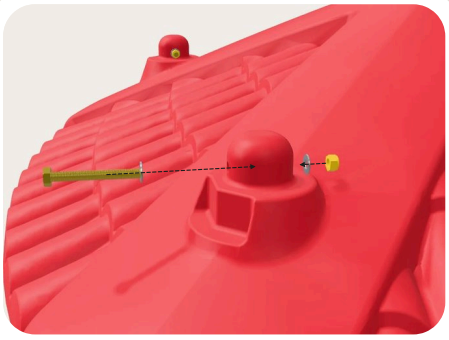

Roof

M8×70 screw with an M8 flat washer on each side and an M8 self-locking nut. 1 set on each tube.



Tube in the leg

The tube's single hole goes at the bottom, lined up with the hole in the leg; the 2 holes go at the top.



Assembly complete

Check the product visually, making sure every part is fitted and firmly fastened. **Only then let children use it.**

Age range: 3 to 8 years. Maximum load of 80 kg per platform.

INSTALLATION DETAILS

Location and safety area

To keep users safe, minimum spaces and free distances must be respected.

Circulation area: at least 1.20 m wide around the equipment, so users can run freely; at least 1.50 m where the path changes direction, so strollers and wheelchairs can get in and turn.

Fall space: neighboring static equipment with overlapping fall spaces must be at least 1.50 m apart for a fall height of up to 600 mm, and 2.50 m for higher falls. Maximum fall height of this product: **700 mm**.

Slide landing area: at least 1000 mm from the sides of the run-out section and 2000 mm (type 01 run-out) or 1000 mm (type 02 run-out) from the end of the run-out section.

Ground: an even, continuous, stable surface that is non-slip in any weather, with no obstacles and a cross slope of no more than 2%. Use on grass, sand, carpet or another soft, level surface.

Location: first check for chemicals and loose material (rubble, sharp objects). Choose an airy place with morning sun, sheltered from drafts; do not install it in basements or garages. Never use it near stairs, roads, swimming pools, water or slippery places. If the area is fenced, the gates must open outwards and be at least 1 m wide.

Ground anchoring kit: comes with the product (2 triangular metal brackets, 6 anchor bolts 3/8" × 2 1/2", 2 M8×70 screws, 2 M8 self-locking nuts and 4 washers), to fix the playground to a firm floor.

To avoid accidents, the child should wear shoes. This product is not intended for commercial use.

INSPECTION AND MAINTENANCE

Keep the playground safe

Visual inspection — daily

- Cleanliness
- Free distances between the ground and the equipment
- Ground surface finish and exposed foundations
- Sharp edges and missing components
- Excessive wear and structural integrity

Operational inspection — every 1 to 3 months

Pay special attention to the structural integrity of the product, besides the items of the visual inspection.

Main inspection — yearly

- Structure: bending, deformation and cracks
- Finish: cracks, chips, broken or open joints
- Missing, bent, broken, loose or worn parts
- Edges, pinch points, access points and protective surfaces

Maintenance

- Tighten the joining parts and clean (do not use paints, solvents or other chemicals)
- Keep the free spaces and drain holes clean
- Replace fasteners and faulty or worn parts

As per NBR 16071-7:2012. Any change that affects safety only after consulting the manufacturer.

XALINGO S/A INDÚSTRIA E COMÉRCIO
BR 471, km 147 – Santa Cruz do Sul – RS – Brasil – CEP 96835-642
CNPJ 95.425.534/0001-76

SAC
(51) 3719-9800 · sac@xalingo.com.br
www.xalingo.com.br

Fun Play · ref. 0999.8
Keep this manual for future reference.