Super Creative Play

ref. 1000.9



ASSEMBLY INSTRUCTIONS

Assembly video on YouTube:
youtu.be/MN92QOq6q34

Product size: **5,26 × 3,10 × 2,15 m**
Two towers joined by a bridge · ages 3 to 8
Assembly by an adult — one person can do it alone.
14 steps · keep this manual for future reference.

BEFORE YOU START

Read carefully

Caution

Give this toy to the child only after it has been **assembled by an adult**, and always use it under **adult supervision**.

Assembly rules

- Mind the tube orientation: the **single hole goes at the bottom**, lined up with the hole in the leg, and the **2 holes go at the top**.
- Every screw must go in with a **washer**, for a more even and secure tightening.
- Mind the platform position: the **side without the recess goes over the tic-tac-toe**.
- Walls always with the **rivets facing out**.
- The bridge, ramps and slides are screwed to the platform **from below**.

Tools




- **10 mm open-end or combination wrench**: M6×45 screws (32 pcs, steps 1 and 12–14) and M6×90 screws (8 pcs, steps 9 and 11)
- **10 mm socket with extension** or **10 mm L-shaped box wrench**: recessed screws of the tic-tac-toe crossbars (step 1)
- **2 × 13 mm wrenches** (or a wrench + a 13 mm socket): M8×70 screw with nut (8 sets, steps 10 and 11). One holds the nut while the other turns the screw.
- Pliers


There are no specific tightening torques for the fasteners. The rivet nuts come already fitted in the parts.

Screws in this playground


Each type has its own color. The same card appears in each step and in the assembly video.

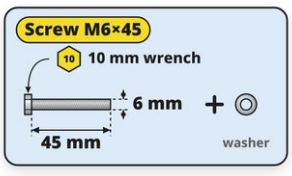

32× Screw M6×45 · steps 1 and 12–14

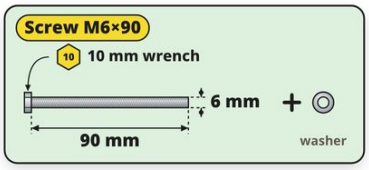

8× Screw M6×90 · steps 9 and 11

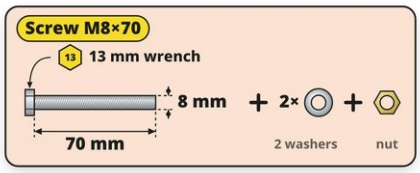

8× Screw M8×70 · steps 10 and 11

PARTS LIST

Super Creative Play parts



PLATFORM 2×
No. 1 · ref. 998711



RIVET NUT 8SJN-M6 92×
No. 2 · ref. 2090183 · already fitted



HEX SCREW M6 6×45 mm 32×
No. 3 · ref. 2090194



M8 FLAT WASHER 18×
No. 4 · ref. 2090185



YELLOW STRIPED WALL 2×
No. 5 · ref. 998707



HEX SCREW M6 6×90 mm 8×
No. 6 · ref. 2090460



ORANGE WALL WITH DOTS 2×
No. 7 · ref. 998706



BRIDGE 1×
No. 8 · ref. 1000902



WASHER 56×
No. 9 · ref. 2090347



WALL WITH WINDOW 2×
No. 10 · ref. 1000903



SLIDE 2×
No. 11 · ref. 998703



CLIMBING RAMP 2×
No. 12 · ref. 998704



LEG 4×
No. 13 · ref. 998708



CROSSBAR 4×
No. 14 · ref. 998709



TIC-TAC-TOE CUBE 9×
No. 15 · ref. 998710

TUBE 2000 8×
No. 16 · ref. 998712



ROOF 2×
No. 17 · ref. 998705



EVA SEAL 8×
No. 18 · ref. 998728



M8 SELF-LOCKING NUT, YELLOW 8×
No. 19 · ref. 2090323



HEX SCREW M8×70 FULLY THREADED 8×
No. 20 · ref. 2090329




ORANGE STRIPED WALL 2×
No. 21 · ref. 998726

PRODUCT ASSEMBLY


Step by step

In each step, the arrows show where the part goes, the **black numbers** give the order and the **yellow letters** point to the details explained under the picture.

1 STEP 1 OF 14
Legs and tic-tac-toe

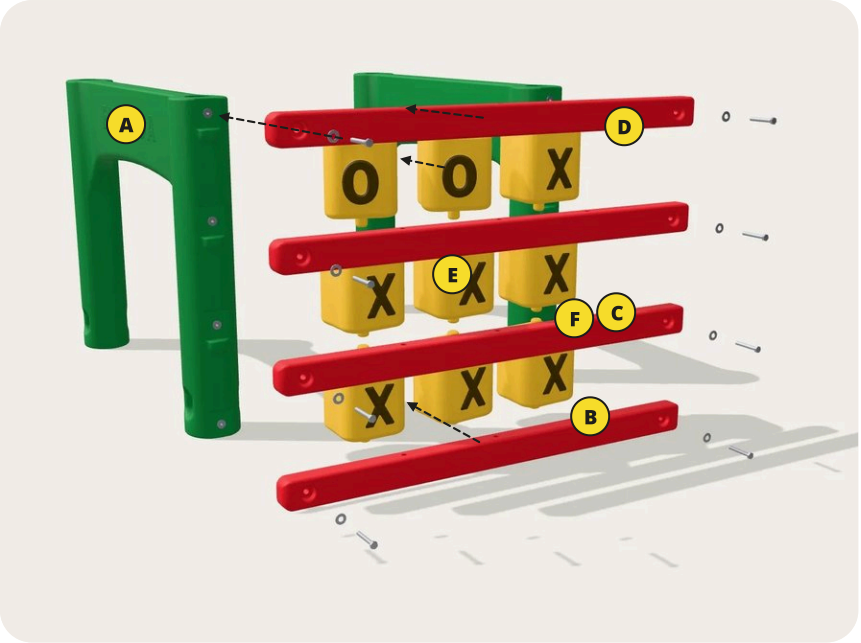

- **A** Legs with the word ENTRADA (entrance) facing out
- **B** Bottom crossbar: holes facing up
- **C** Middle crossbars: through holes
- **D** Top crossbar: holes facing down
- **E** The cubes fit on the crossbar pins
- **F** 8 M6×45 screws + washer

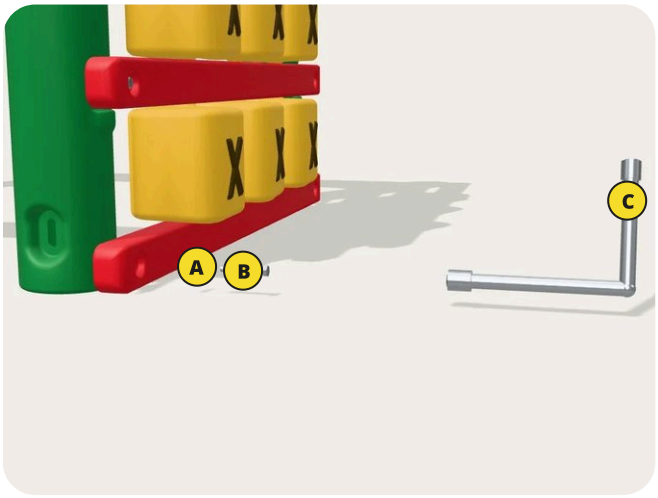

Detail: fixing the crossbars

- **A** Washer
- **B** M6×45 hex screw
- **C** 10 mm wrench: socket with extension or L-shaped box wrench

Start with **tower 1**, the one with the tic-tac-toe. Place the two legs with the word **ENTRADA (entrance) facing out**.

Build the tic-tac-toe from the bottom up: crossbar, 3 cubes, crossbar, 3 cubes, crossbar, 3 cubes and the top crossbar. The cube pins fit into the crossbar holes.

Check the crossbar holes: on the **bottom crossbar**, near the ground, the holes face **up**; on the **top** one, **down**. The **middle crossbars** have through holes.


Screw each crossbar end to the leg with an **M6×45 screw and washer** (8 in total).

CAUTION
The screw sits recessed inside the crossbar: use a **10 mm socket with extension** or a **10 mm L-shaped box wrench**.

PARTS FOR THIS STEP

- **2×** Leg ref. 998708
- **4×** Crossbar ref. 998709
- **9×** Tic-tac-toe cube ref. 998710
- **8×** M6×45 hex screw ref. 2090194
- **8×** Washer one on each screw

SCREW AND TOOL




Tool: **10 mm socket with extension** or **10 mm L-shaped box wrench** (the screw sits recessed).



How it looks at the end of step 1

STEP 2 OF 14


2 Floor and 3 tubes

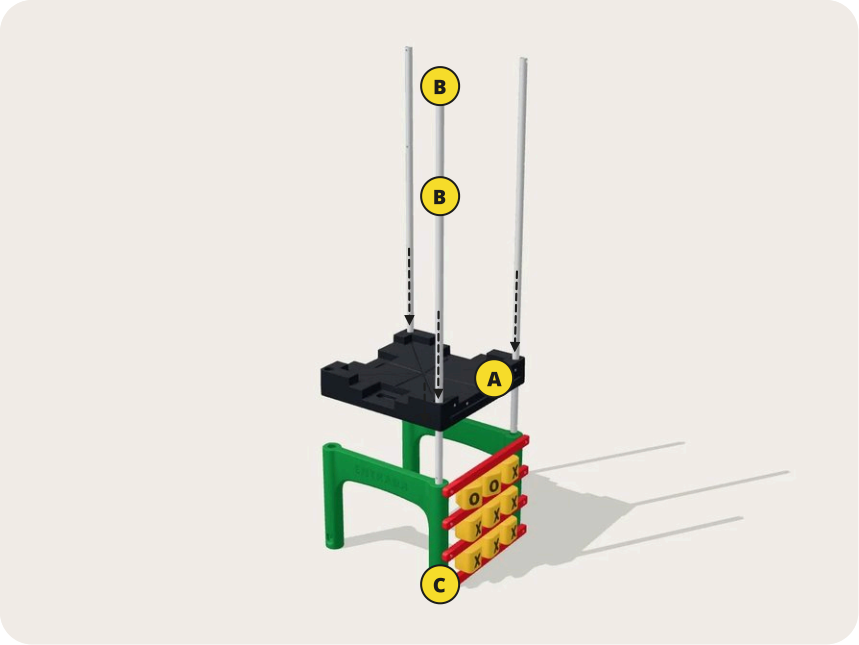

A Side without recess over the tic-tac-toe

B The tube's 2 holes at the top

C The tube's bottom hole lined up with the hole in the leg

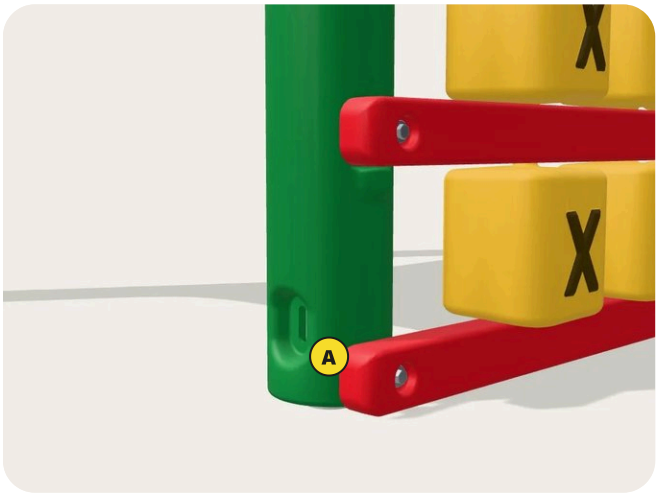

The tube's bottom hole lined up with the leg

A Tube hole lined up with the leg hole

Place the floor on the legs, minding its orientation to the tic-tac-toe: the **side of the floor without a recess goes over the tic-tac-toe**.

Push **3 tubes** through the corners of the platform down to the bottom of the legs. The fourth corner stays without a tube for now.


CAUTION
Tube orientation: the **single hole goes down**, lined up with the hole in the leg, and the **2 holes go up**.

PARTS FOR THIS STEP



1× Platform
ref. 998711


3× Tube 2000
ref. 998712

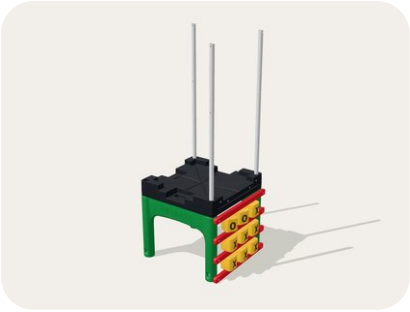

How it looks at the end of step 2

STEP 3 OF 14

3 Identify the walls

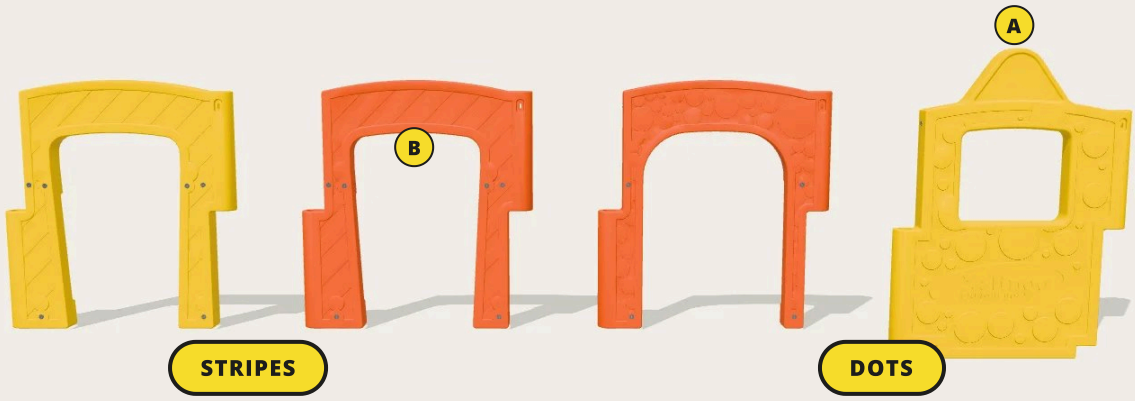

A With window: goes on the tic-tac-toe side

B Rivet nuts always facing out

Each tower takes **4 walls, one of each type**: yellow striped, orange striped, orange with dots and with window. They come in pairs, one set for each tower.

Position on the tower: the **orange one with dots** goes on the ramp side, the **yellow striped** on the slide side, the **orange striped** on the bridge side and the one **with window** opposite the ramp (on tower 1, over the tic-tac-toe).

CAUTION
When fitting the walls, always keep the **rivets on the outside**: they hold the bridge, the ramp and the slides.

4 STEP 4 OF 14
Wall with dots and EVA



A EVA spacer on top

B Orange wall with dots

Fit the wall with orange dots (ramp side) by sliding it down the tubes.

Place an **EVA spacer on top**, at the corner where the yellow striped wall will meet.

PARTS FOR THIS STEP

1× Orange wall with dots
ref. 998706

1× EVA seal (spacer)
ref. 998728



How it looks at the end of step 4

5 STEP 5 OF 14
Yellow striped wall



A The yellow striped wall slides down the tubes

Slide the yellow striped wall (slide side) down the tubes, on top of the EVA spacer.

PARTS FOR THIS STEP


1× Yellow striped wall
ref. 998707



How it looks at the end of step 5

STEP 6 OF 14

6 Wall with window

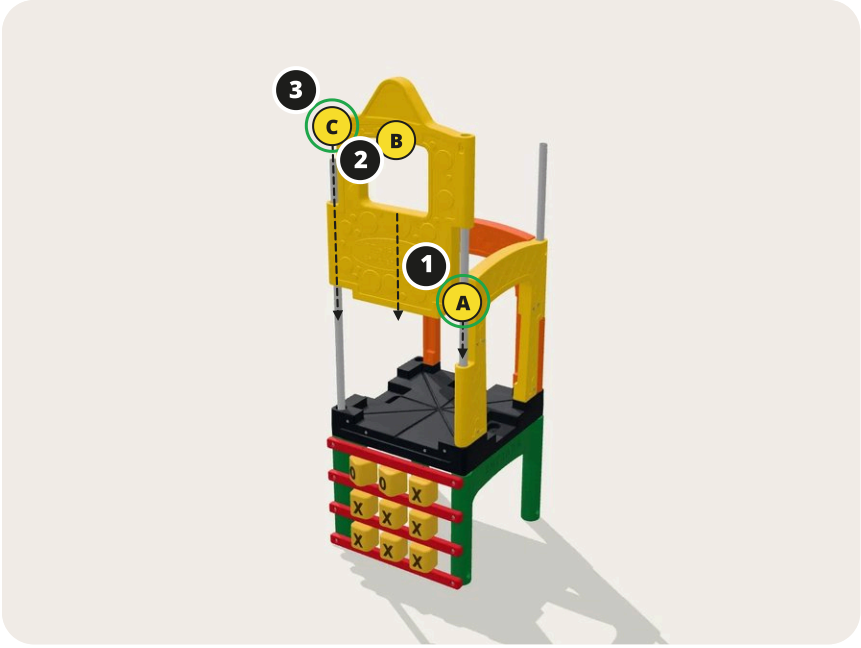

A EVA on top, before the wall with window

B Wall with window: tic-tac-toe side

C EVA on top, in the other corner

1. Place an EVA spacer on top of the corner of the yellow striped wall.

2. Fit the **wall with window** (on tower 1, on the tic-tac-toe side).

3. Put another EVA spacer on top, in the next corner.

CAUTION
In steps 4 and 6, the EVA spacer goes **on top, before** the wall that closes that corner. The last one (step 8) goes in **from the front**, after the last wall.

PARTS FOR THIS STEP



2× EVA seal (spacer)
ref. 998728




1× Wall with window and dots
ref. 1000903



How it looks at the end of step 6

STEP 7 OF 14

7 Last wall (orange striped)

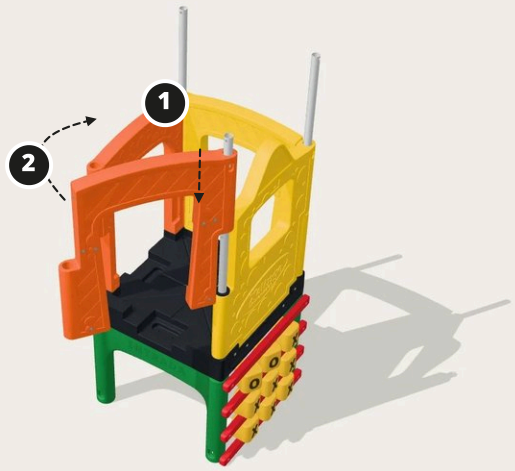

1. Fit the end of the orange striped wall onto the **corner tube already in place** and lower the wall straight down, **swung open outward**.

2. With the wall resting on the platform, **swing it around the tube** until the square is closed.

> The other corner of this wall still has no tube: it goes in at step 8 and locks the walls.

PARTS FOR THIS STEP




1× Orange striped wall
ref. 998726



How it looks at the end of step 7

STEP 8 OF 14

8 Last EVA and 4th tube

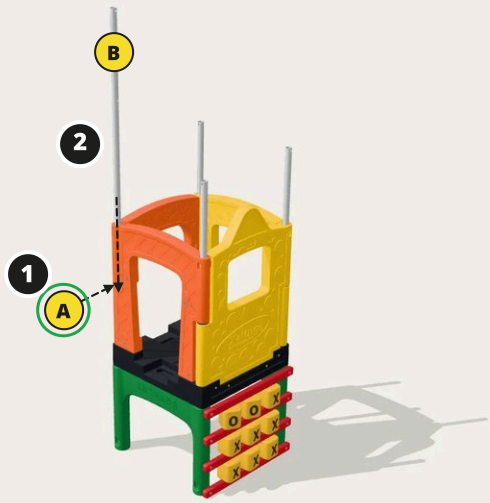

A Last EVA spacer: goes in from the front, flat

B Then lower the last tube: it locks the walls

1. Fit the last EVA spacer **from the front**, flat, in the corner that has no tube yet.

2. Then lower the **4th tube** (single hole down): it goes through the walls and the EVA and locks the whole set.

PARTS FOR THIS STEP

1× Tube 2000
ref. 998712


1× EVA seal (spacer)
ref. 998728




How it looks at the end of step 8

STEP 9 OF 14

9 Join the walls

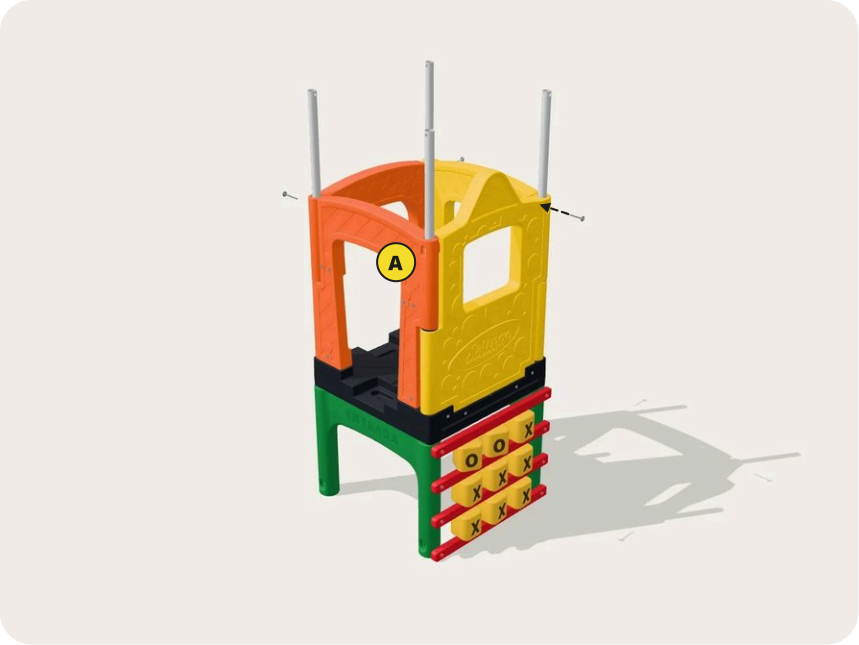

A 4 M6×90 screws go through the tubes (1 in each corner)

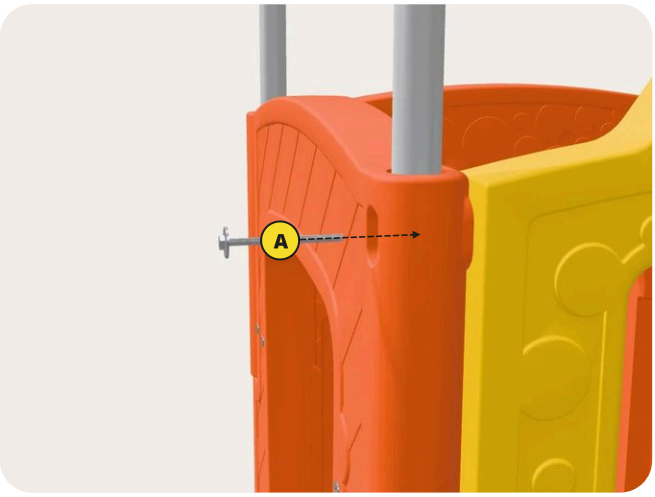

M6×90 screw going through the tube

A M6×90 screw + washer

Join the walls with the longer screws: **4 M6×90 screws with washers**, 1 in each corner, put in **from the outside in**.

The tubes have through holes for the screws.

PARTS FOR THIS STEP




4× M6×90 hex screw ref. 2090460



4× Washer one on each screw

SCREW AND TOOL

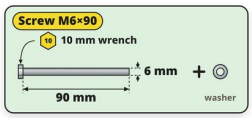

Tool: **10 mm wrench**.




How it looks at the end of step 9

STEP 10 OF 14

10 Roof



A The roof fits on the 4 tubes

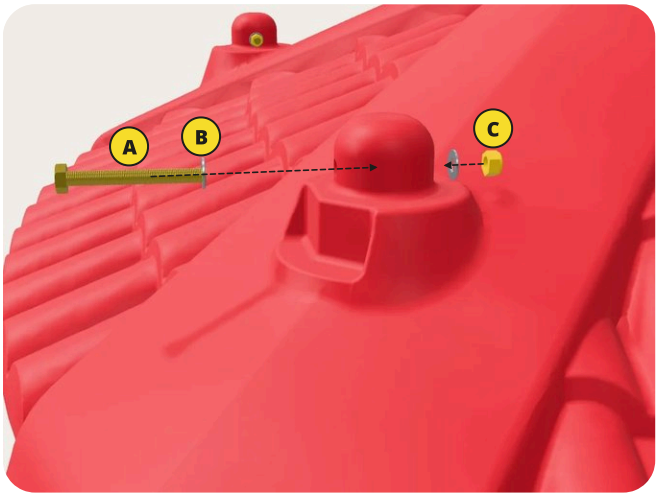

Roof fastening on each tube

A M8×70 screw

B M8 flat washer (on both sides)

C M8 self-locking nut (on the other side)

Place the roof on the 4 tubes.

In each corner, fasten with an **M8×70 screw**, an **M8 flat washer on each side** and an **M8 self-locking nut** (4 sets, 8 washers): the screw goes in with one washer on one side, and the other washer and the nut go on the other side.

PARTS FOR THIS STEP



1× Roof
ref. 998705



8× M8 flat washer
ref. 2090185




4× M8 self-locking nut, yellow
ref. 2090323



4× M8×70 hex screw (fully threaded)
ref. 2090329

SCREW AND TOOL

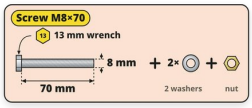

Tool: 2 × 13 mm wrenches: one holds the nut while the other turns the screw.



How it looks at the end of step 10

STEP 11 OF 14


11 Second tower




A Second tower: same assembly (steps 2 to 10), without the tic-tac-toe

B Orange striped walls facing each other

SCREWS AND TOOLS

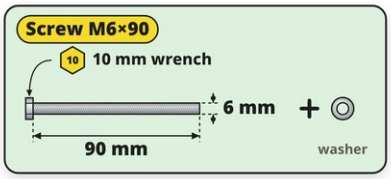

Tool: **10 mm wrench.**

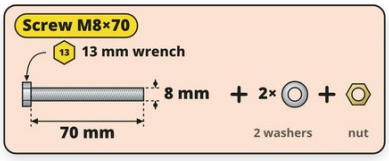

Tool: **2 × 13 mm wrenches**: one holds the nut while the other turns the screw.

Assemble **tower 2** the same way, repeating steps 1 to 10 but **without the tic-tac-toe**: legs, platform and 3 tubes, the 4 walls with the EVA spacers, the 4th tube, the 4 M6×90 screws and the roof.

On tower 2, the **platform side without the recess** goes on the side of the **wall with window**, as on tower 1.

Place the towers with the **orange striped walls facing each other**: the bridge goes between them. The walls with window end up on opposite sides.

> Leave about 80 cm between the platforms of the two towers; the bridge sets the exact distance in the next step.

PARTS FOR THIS STEP

- **1×** Roof ref. 998705
- **1×** Orange wall with dots ref. 998706
- **1×** Yellow striped wall ref. 998707
- **2×** Leg ref. 998708
- **1×** Platform ref. 998711
- **4×** Tube 2000 ref. 998712
- **1×** Orange striped wall ref. 998726
- **4×** EVA seal (spacer) ref. 998728
- **1×** Wall with window and dots ref. 1000903
- **8×** M8 flat washer ref. 2090185
- **4×** M8 self-locking nut, yellow ref. 2090323
- **4×** M8×70 hex screw (fully threaded) ref. 2090329
- **4×** M6×90 hex screw ref. 2090460
- **4×** Washer one on each screw

STEP 12 OF 14

12 Bridge




Fit the bridge between the two towers, on the orange striped walls, and screw it: **8 M6×45 screws with washer**.


Top: the bridge has **4 tabs**, 2 at each end. Each tab takes **1 screw with washer**, which goes through the tab and threads into the **wall rivet**.

Bottom: 2 screws under each platform, from below.

CAUTION
Parts fixed to the platform (bridge, slides and ramps) must be screwed **from below**.

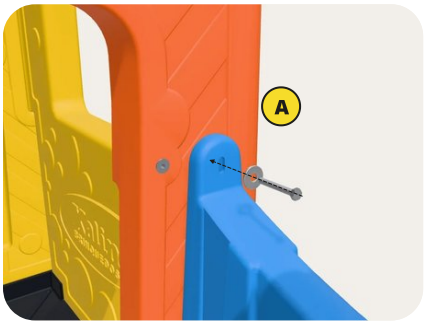

Top: bridge tab on the wall

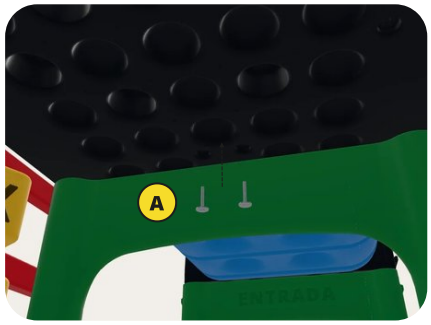

Bottom: under the platform


PARTS FOR THIS STEP

1× Bridge ref. 1000902

8× M6×45 hex screw ref. 2090194

8× Washer one on each screw

SCREW AND TOOL




Tool: **10 mm wrench.**




How it looks at the end of step 12

STEP 13 OF 14


13 Curved slides

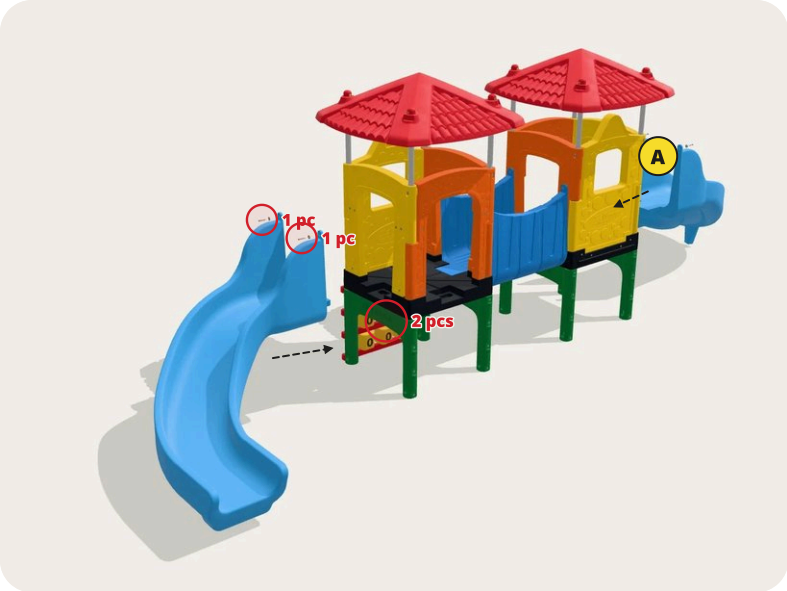

A The other slide goes on tower 2, the same way

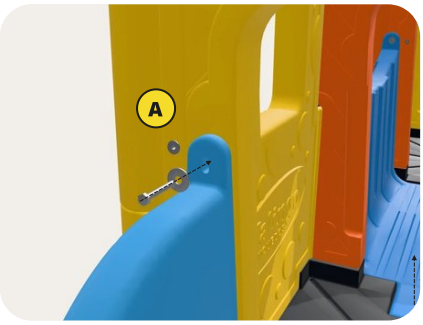

Top: slide tab on the wall

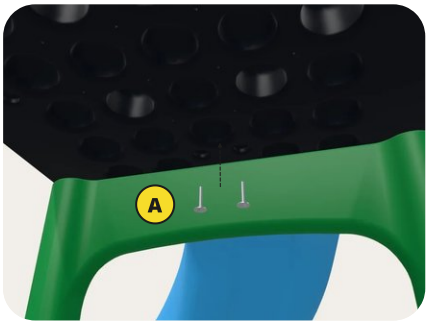

Bottom: under the platform

Fit the 2 curved slides, one on each tower, on the yellow striped wall, and screw them: **8 M6×45 screws with washer**.

Top: each slide has **2 tabs**, one on each side. Each tab takes **1 screw with washer** into the wall rivet.

Bottom: 2 screws under the platform, from below.


PARTS FOR THIS STEP

2× Curved slide ref. 998703

8× M6×45 hex screw ref. 2090194

8× Washer one on each screw

SCREW AND TOOL



Tool: **10 mm wrench.**




How it looks at the end of step 13

STEP 14 OF 14


14 Climbing ramps



A The other ramp goes on tower 2, the same way

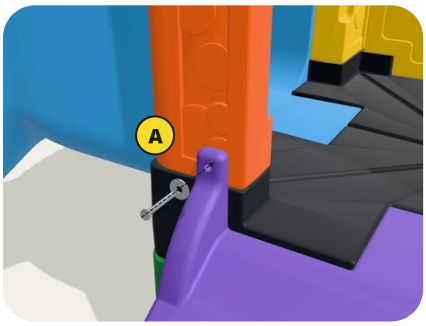

Top: ramp tab on the wall

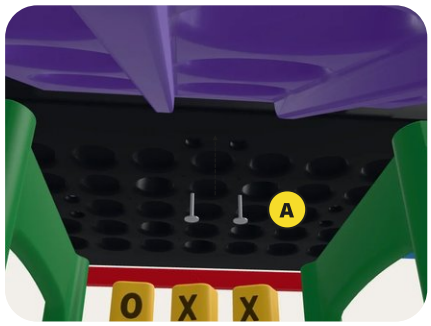

Bottom: under the platform

Fit the 2 ramps, one on each tower, on the orange wall with dots, and screw them: **8 M6×45 screws with washer**.

Top: each ramp has **2 tabs**, one on each side. Each tab takes **1 screw with washer** into the wall rivet.

Bottom: 2 screws under the platform, from below.

PARTS FOR THIS STEP



2× Climbing ramp
ref. 998704




8× M6×45 hex screw
ref. 2090194



8× Washer
one on each screw

SCREW AND TOOL




Tool: **10 mm wrench.**



How it looks at the end of step 14

FASTENING DETAILS

How each part is screwed on

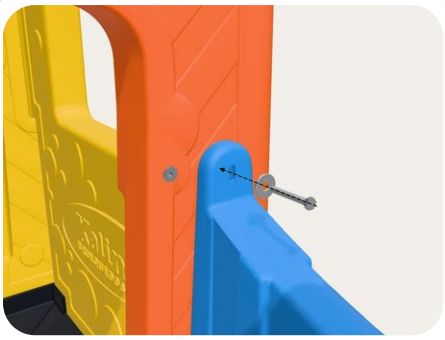


Bridge

M6×45 screw + washer through the bridge tab, into the rivet of the orange striped wall. 4 tabs, 1 screw in each.




Slide

M6×45 screw + washer through the slide tab, into the rivet of the yellow striped wall. 2 per slide.

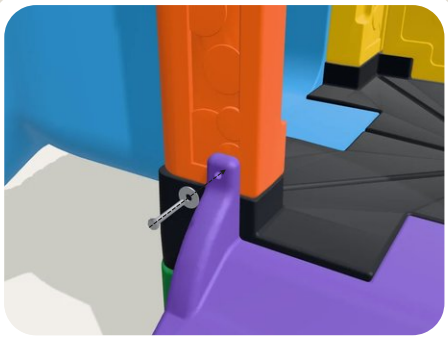


Climbing ramp

M6×45 screw + washer through the ramp tab, into the rivet of the wall with dots. 2 per ramp.

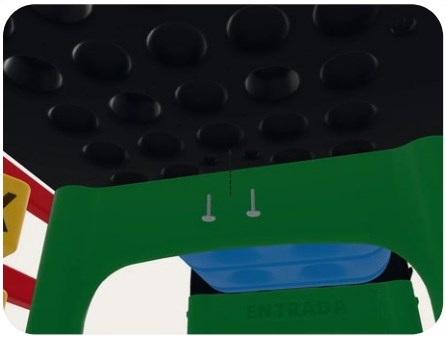


Bottom fastening

Bridge, slides and ramps: 2 M6×45 screws + washer under the platform, always from below.

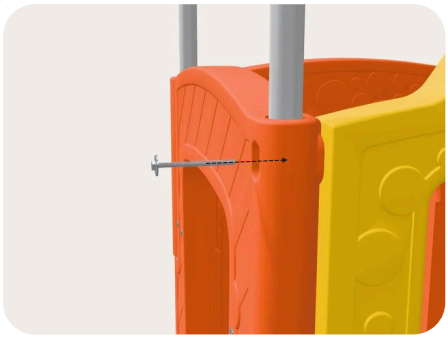

Wall

M6×90 screw + washer, from the outside in, through both walls and the tube. 1 in each corner.

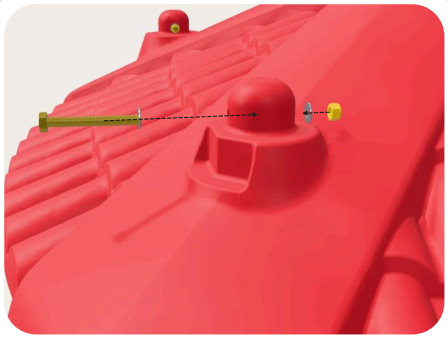

Roof

M8×70 screw with an M8 flat washer on each side and an M8 self-locking nut. 1 set on each tube.



Assembly complete

Check the product visually, making sure every part is fitted and firmly fastened. **Only then let children use it.**

Age range: 3 to 8 years. Maximum load of 80 kg per platform.

INSTALLATION DETAILS

Location and safety area

To keep users safe, minimum spaces and free distances must be respected.

Circulation area: at least 1.20 m wide around the equipment, so users can run freely; at least 1.50 m where the path changes direction, so strollers and wheelchairs can get in and turn.

Fall space: neighboring static equipment with overlapping fall spaces must be at least 1.50 m apart for a fall height of up to 600 mm, and 2.50 m for higher falls. Maximum fall height of this product: **700 mm**.

Slide landing area: at least 1000 mm from the sides of the run-out section and 2000 mm (type 01 run-out) or 1000 mm (type 02 run-out) from the end of the run-out section.

Ground: an even, continuous, stable surface that is non-slip in any weather, with no obstacles and a cross slope of no more than 2%. Use on grass, sand, carpet or another soft, level surface.

Location: first check for chemicals and loose material (rubble, sharp objects). Choose an airy place with morning sun, sheltered from drafts; do not install it in basements or garages. Never use it near stairs, roads, swimming pools, water or slippery places. If the area is fenced, the gates must open outwards and be at least 1 m wide.

To avoid accidents, the child should wear shoes. This product is not intended for commercial use.

INSPECTION AND MAINTENANCE

Keep the playground safe

Visual inspection — daily

- Cleanliness
- Free distances between the ground and the equipment
- Ground surface finish and exposed foundations
- Sharp edges and missing components
- Excessive wear and structural integrity

Operational inspection — every 1 to 3 months

Pay special attention to the structural integrity of the product, besides the items of the visual inspection.

Main inspection — yearly

- Structure: bending, deformation and cracks
- Finish: cracks, chips, broken or open joints
- Missing, bent, broken, loose or worn parts
- Edges, pinch points, access points and protective surfaces

Maintenance

- Tighten the joining parts and clean (do not use paints, solvents or other chemicals)
- Keep the free spaces and drain holes clean
- Replace fasteners and faulty or worn parts

As per NBR 16071-7:2012. Any change that affects safety only after consulting the manufacturer.

XALINGO S/A INDÚSTRIA E COMÉRCIO
BR 471, km 147 – Santa Cruz do Sul – RS – Brasil – CEP 96835-642
CNPJ 95.425.534/0001-76

SAC
(51) 3719-9800 · sac@xalingo.com.br
www.xalingo.com.br

Super Creative Play · ref. 1000.9
Keep this manual for future reference.