Bridge Play

ref. 1004.3



ASSEMBLY INSTRUCTIONS

Assembly video on YouTube:
youtu.be/RR2g9snCZ-k

Product size: **6,66 × 5,19 × 2,19 m**
Three towers joined by 2 bridges, with tunnel slide, 2 slides, 3 ramps and a swing set with 2 swings
Installation area: 6.7 × 5.2 m
Assembly by an adult — one person can do it alone.
19 steps · keep this manual for future reference.

BEFORE YOU START

Read carefully

Caution

Give this toy to the child only after it has been **assembled by an adult**, and always use it under **adult supervision**.

Assembly rules

- Follow the tube orientation: the **single hole goes at the bottom**, lined up with the hole in the leg, and the **top holes stay at the top**.
- Every screw must go in with a **washer**, for a more even and secure tightening.
- Mind the position of each platform: the **side without the recess** goes on the tunnel side on the center tower and on the window wall side on the towers with roof.
- Walls always with the **rivet nuts facing out**, and always an **EVA spacer** between two walls.
- Bridges, ramps and slides are screwed to the platform **from below**.

Tools




- **10 mm open-end or combination wrench**: M6×90 screws (12 pcs, steps 6, 10 and 11) and M6×45 screws (66 pcs, steps 12–18)
- **2 × 13 mm wrenches** (or a wrench + a 13 mm socket): M8×70 screws with nut (8 sets, steps 10 and 11) and 5/16" × 2 1/4" screws with nut (2 sets, step 18). One holds the nut while the other turns the screw.
- Pliers


There are no specific tightening torques for the fasteners. The rivet nuts come already fitted in the parts.

Screws in this playground


Each type has its own color. The same card appears in each step and in the assembly video.

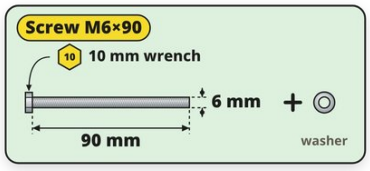


12× Screw M6×90 · steps 6, 10 and 11

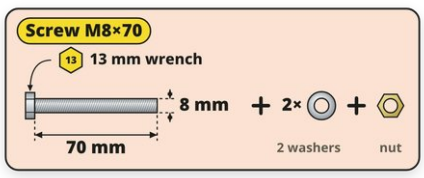

8× Screw M8×70 · steps 10 and 11



66× Screw M6×45 · steps 12–18

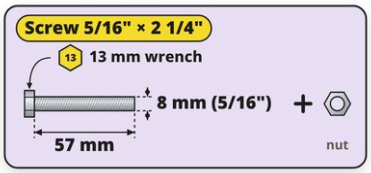

2× Screw 5/16" × 2 1/4" · step 18

PARTS LIST

Bridge Play parts



PLATFORM — 3×
No. 1 · ref. 998711



RIVET NUT 8SJN-M6 — 166×
No. 2 · ref. 2090183 · already fitted



HEX SCREW M6 6×45 mm — 66×
No. 3 · ref. 2090194



M8 FLAT WASHER — 28×
No. 4 · ref. 2090185



BRIDGE — 2×
No. 5 · ref. 1000902



WASHER — 66×
No. 6 · ref. 2090347



WINDOW WALL — 1×
No. 7 · ref. 1000903



HEX SCREW M6 6×90 mm — 12×
No. 8 · ref. 2090460



SWING WINDOW WALL — 1×
No. 9 · ref. 1000930



CLIMBING RAMP — 3×
No. 10 · ref. 998704



TUNNEL SLIDE — 1×
No. 11 · ref. 998702




TUNNEL SLIDE BASE — 2×
No. 12 · ref. 998714



SMALL CROSSBAR — 2×
No. 13 · ref. 953203



ORANGE STRIPED WALL — 3×
No. 14 · ref. 998726



SLIDE — 2×
No. 15 · ref. 998703



LEG — 6×
No. 16 · ref. 998708



YELLOW WALL WITH DOTS — 1×
No. 17 · ref. 998730



SWING BEAM METAL LOCK — 2×
No. 18 · ref. 954312



HEX SCREW NC ZINC 5/16 × 2 1/4 — 2×
No. 19 · ref. 2090392



5/16 NYLON SELF-LOCKING NUT — 2×
No. 20 · ref. 2090370

1.5" SWING BEAM — 1×
No. 21 · ref. 954314



RED SWING-SET SUPPORT — 1×
No. 22 · ref. 975408



PLASTIC HOOP — 1×
No. 23 · ref. 988702

FRAME TUBE — 8×
No. 24 · ref. 998712



ROOF — 2×
No. 25 · ref. 998705

FRAME TUBE, TOWER WITHOUT ROOF — 4×
No. 26 · ref. 1003202



EVA SEAL — 12×
No. 27 · ref. 998728



SWING — 2×
No. 28 · ref. 2501002



TUBE CAP — 4×
No. 29 · ref. 1100137



M8 SELF-LOCKING NUT — 8×
No. 30 · ref. 2090323



HEX SCREW M8×70 ZINC — 8×
No. 31 · ref. 2090329



ORANGE WALL WITH DOTS — 3×
No. 32 · ref. 998706



YELLOW STRIPED WALL — 3×
No. 33 · ref. 998707

PRODUCT ASSEMBLY

Step by step

In each step, the arrows show where the part goes, the **black numbers** give the order and the **yellow letters** point to the details explained under the picture.

1

STEP 1 OF 19


Center tower: legs, platform and 3 tubes



A Platform side without the recess: tunnel side

B The tube's holes at the top

C The tube's bottom hole lined up with the hole in the leg

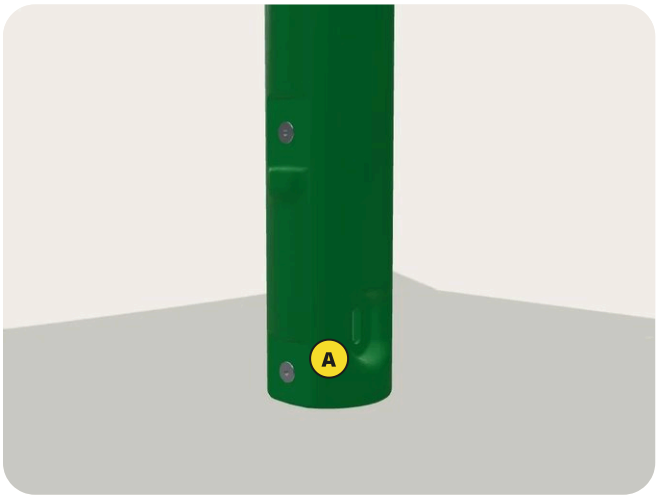

The tube's bottom hole lined up with the leg

A Tube hole lined up with the hole in the leg

Start with the **center tower**, the tower without a roof. Place the 2 legs and set the platform on them.

Mind the platform position: the **platform side without the recess goes on the tunnel side** (where the yellow wall with dots goes).

Insert **3 tubes of 1550 mm** through the corners of the platform down to the bottom of the legs. The fourth corner stays without a tube for now.

CAUTION
Tube orientation: the **single hole goes at the bottom**, lined up with the hole in the leg, and the **top holes stay at the top**.

> The 4 shorter tubes (1550 mm) are for the center tower. The 8 tubes of 2000 mm are for the two towers with roof.

PARTS FOR THIS STEP



2× Leg
ref. 998708



1× Platform
ref. 998711


3× Tube 1550 (tower without roof)
ref. 1003202



How it looks at the end of step 1

STEP 2 OF 19

2 Identify the walls

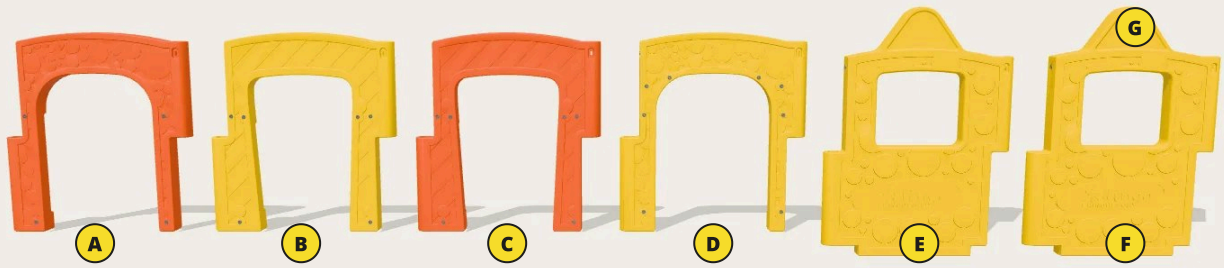

- **A** Orange wall with dots (3 pcs): one on each tower
- **B** Yellow striped wall (3 pcs): one on each tower
- **C** Orange striped wall (3 pcs): one on each tower
- **D** Yellow wall with dots (1 pc): center tower, tunnel side
- **E** Window wall (1 pc): second tower with roof
- **F** Swing window wall (1 pc): swing tower
- **G** Only the swing wall has the hole and the 4 rivet nuts for the tube lock

The Bridge Play has **12 walls**, 4 on each tower. Each tower takes one **orange wall with dots**, one **yellow striped** wall and one **orange striped** wall.

The fourth wall is different on each tower: the **yellow wall with dots** on the center tower (tunnel side), the **swing window wall** on the swing tower and the **window wall** on the second tower with roof.

Position on the center tower: **orange with dots** on the side of the bridge to the swing tower, **yellow striped** on the ramp side, **orange striped** on the side of the bridge to the second tower and **yellow with dots** on the tunnel side.

CAUTION
When fitting the walls, always keep the **rivet nuts facing out**: they hold the bridges, ramps, slides and tunnel.

STEP 3 OF 19

3 Center tower walls



A EVA spacer on top, at the corner, before the next wall

Fit the walls by sliding them down the tubes, in the order of the numbers in the picture:

1. Orange wall with dots (side of the bridge to the swing tower). **2.** EVA spacer on top, at the corner.

3. Yellow striped wall (ramp side). **4.** EVA spacer at the next corner.

5. Yellow wall with dots (tunnel side). **6.** EVA spacer at the other corner.

CAUTION
The EVA spacer goes **on top, before** the wall that closes that corner: there is always an EVA spacer between two walls.

PARTS FOR THIS STEP



1× Orange wall with dots
ref. 998706



1× Yellow striped wall
ref. 998707



3× EVA seal (spacer)
ref. 998728



1× Yellow wall with dots
ref. 998730



How it looks at the end of step 3

STEP 4 OF 19

4 Last wall of the center tower



1. Fit the end of the **orange striped wall** (side of the bridge to the second tower) on the **corner tube already in place** and slide the wall down upright, **swung open to the outside**.

2. With the wall resting on the platform, **turn it around the tube** until the square is closed.

> This wall's other corner still has no tube: it goes in at step 5 and locks the walls.

PARTS FOR THIS STEP




1× Orange striped wall
ref. 998726



How it looks at the end of step 4

STEP 5 OF 19

5 Last EVA, 4th tube and caps

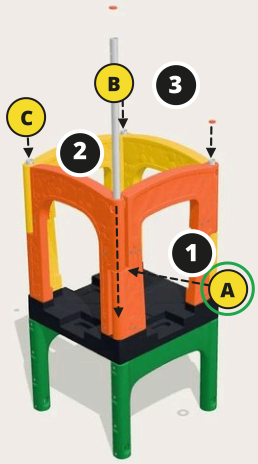

A Last EVA spacer: goes in from the front, horizontally

B Slide down the 4th tube: it locks the walls

C Caps fitted on top of the 4 tubes

1. Fit the last EVA spacer **from the front**, horizontally, at the corner that still has no tube.

2. Slide down the **4th tube** (single hole at the bottom): it goes through the walls and the EVA and locks everything together.

3. Fit the **4 caps** on top of the tubes.

CAUTION
Mind the **finishing caps**: they must be fitted on top of the 4 tubes of the center tower.

PARTS FOR THIS STEP



1× EVA seal (spacer)
ref. 998728

1× Tube 1550 (tower without roof)
ref. 1003202



4× Tube cap
ref. 1100137




How it looks at the end of step 5

STEP 6 OF 19

6 Join the center tower walls



A 4 M6×90 screws go through the tubes (1 at each corner)

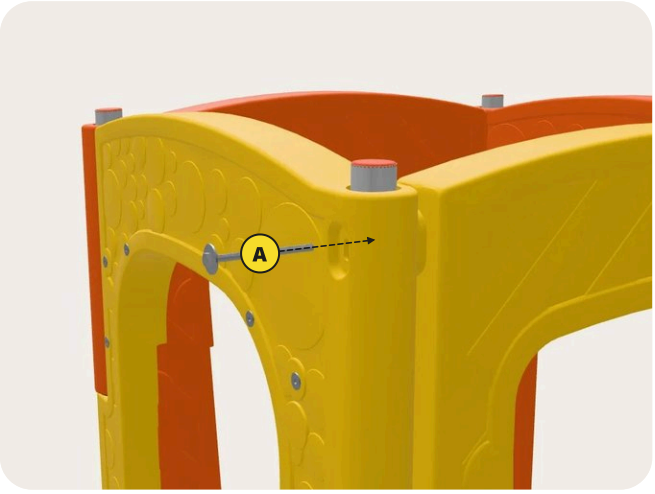

M6×90 screw going through the tube

A M6×90 screw + washer

Join the walls with the longer screws: **4 M6×90 screws with washer**, 1 at each corner, put in **from the outside in**.

The tubes have through holes for the screws.

PARTS FOR THIS STEP




4× Washer
one on each screw



4× M6×90 hex screw
ref. 2090460

SCREW AND TOOL




Tool: **10 mm wrench**.



How it looks at the end of step 6

STEP 7 OF 19

7 Swing tower: legs, platform and 3 tubes

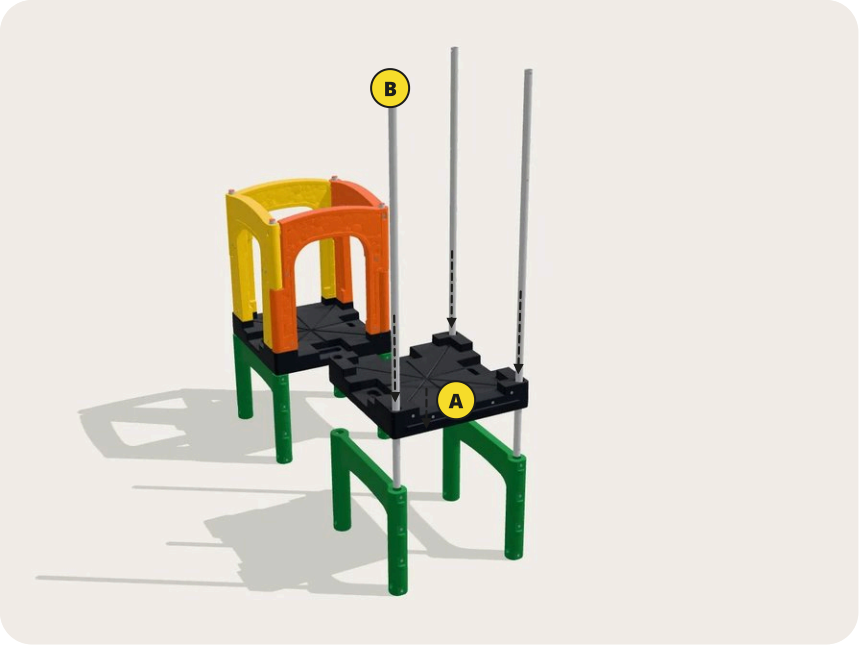

A Platform side without the recess: swing side (swing window wall)

B The tube's holes at the top

Now build the **swing tower**, one of the two towers with roof. Place the 2 legs and set the platform on them.

Mind the platform position: the **side without the recess goes on the swing side** (where the swing window wall goes).

Insert **3 tubes of 2000 mm** through the corners of the platform down to the bottom of the legs, with the single hole at the bottom.

> The towers with roof are built like the center tower (steps 1 to 6), with 2000 mm tubes, without the caps and with the roof at the end.

PARTS FOR THIS STEP



2× Leg
ref. 998708



1× Platform
ref. 998711


3× Tube 2000
ref. 998712



How it looks at the end of step 7

STEP 8 OF 19

8 Swing tower walls

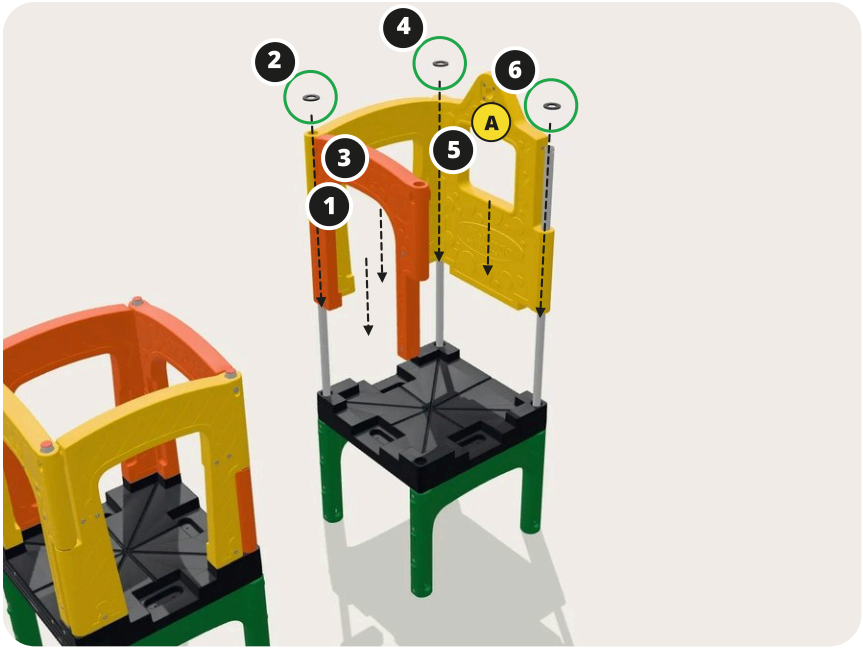

A Swing window wall: opposite the bridge

Fit the walls and the EVA spacers in the same order as in step 3:

1. Orange wall with dots (bridge side) and **2.** EVA. **3. Yellow striped wall** (ramp side) and **4.** EVA.

5. Swing window wall (swing side, opposite the bridge) and **6.** EVA.

CAUTION
Always keep the **rivet nuts facing out** and an EVA spacer between two walls.

PARTS FOR THIS STEP



1× Orange wall with dots
ref. 998706




1× Yellow striped wall
ref. 998707



3× EVA seal (spacer)
ref. 998728




1× Swing window wall
ref. 1000930

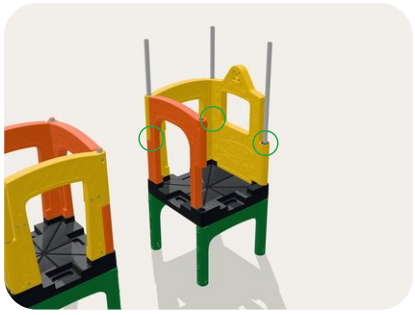

How it looks at the end of step 8

STEP 9 OF 19

9 Last wall, last EVA and 4th tube

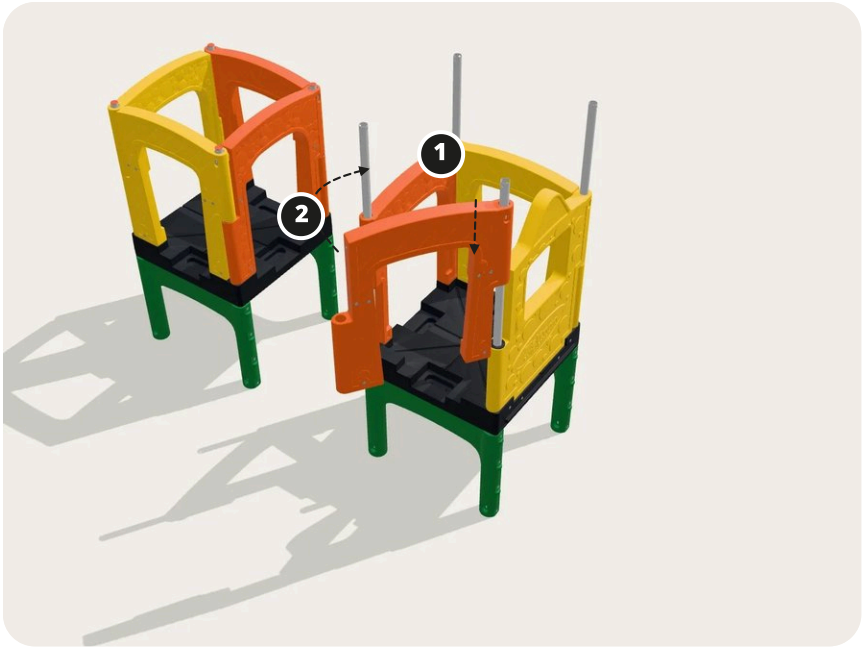

1. Fit the **orange striped wall** (slide side) on the corner tube already in place and slide it down upright, swung open to the outside. **2.** Resting on the platform, **turn it around the tube** until the square is closed.


Then fit the **last EVA spacer from the front**, horizontally, and slide down the **4th tube** (single hole at the bottom), which locks the walls.

PARTS FOR THIS STEP


1× Tube 2000
ref. 998712

1× Orange striped wall
ref. 998726

1× EVA seal (spacer)
ref. 998728

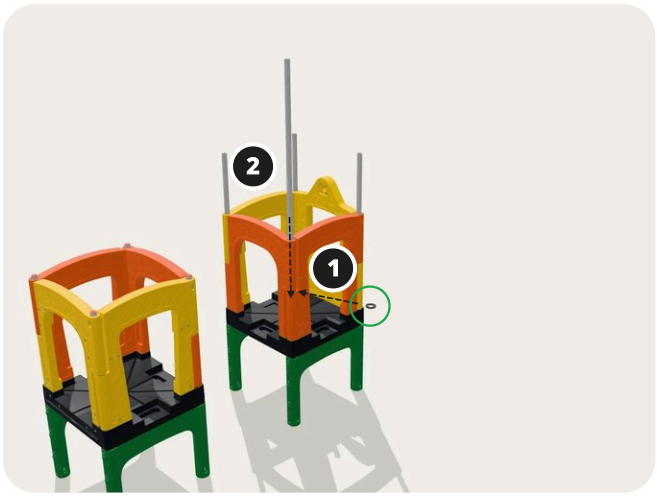


Last EVA (1) and 4th tube (2)

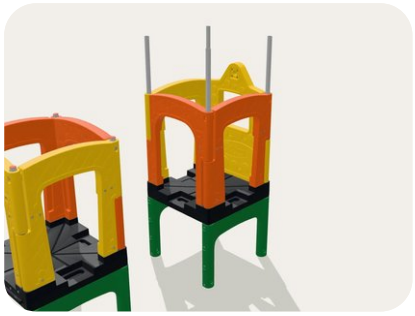

How it looks at the end of step 9


STEP 10 OF 19

10 Join the walls and roof

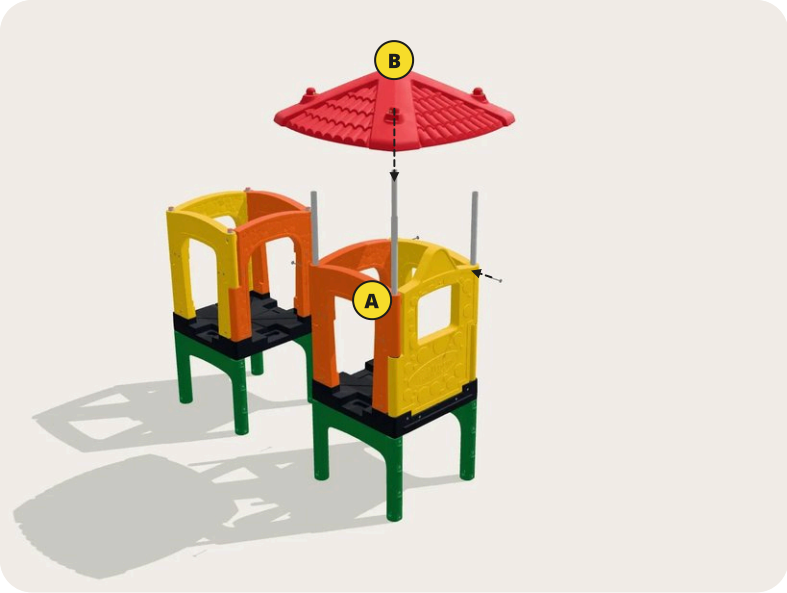


A 4 M6×90 screws + washer, 1 at each corner

B The roof fits on the 4 tubes

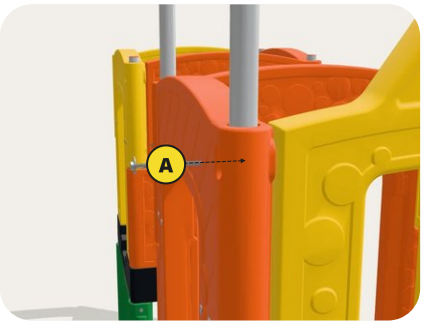

M6×90 screw going through the tube

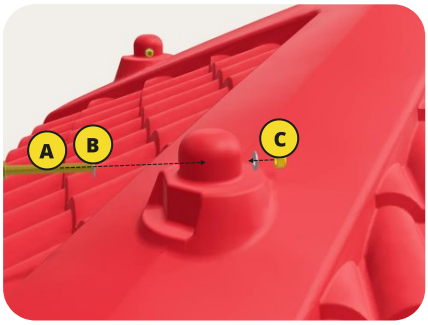

Roof fixing on each tube

Join the walls with **4 M6×90 screws with washer**, 1 at each corner, from the outside in.

Place the roof on the 4 tubes. At each corner, fix it with an **M8×70 screw**, an **M8 flat washer on both sides** and an **M8 self-locking nut** (4 sets, 8 washers): the screw goes in with a washer on one side and, on the other side, go the other washer and the nut.

PARTS FOR THIS STEP



1× Roof
ref. 998705



8× M8 flat washer
two on each M8×70 screw



4× M8 self-locking nut, yellow
ref. 2090323



4× M8×70 hex screw (fully threaded)
ref. 2090329




4× Washer
one on each screw



4× M6×90 hex screw
ref. 2090460

SCREWS AND TOOLS



Tool: **10 mm wrench.**



Tool: **2 × 13 mm wrenches**: one holds the nut while the other turns the screw.



How it looks at the end of step 10

STEP 11 OF 19


11 Second tower with roof




A Second tower with roof: build it like the swing tower (steps 7 to 10)

B The window wall goes here (without the swing hole)

SCREWS AND TOOLS

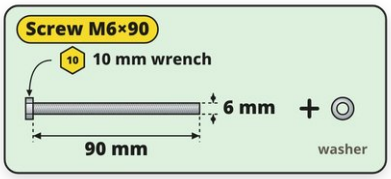

Tool: **10 mm wrench.**

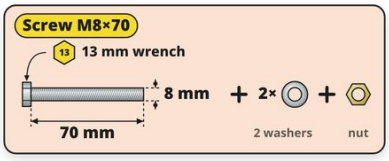

Tool: **2 × 13 mm wrenches**: one holds the nut while the other turns the screw.

Build the **second tower with roof** the same way, repeating steps 7 to 10: legs, platform and 3 tubes of 2000 mm, the 4 walls with the EVA spacers, the 4th tube, the 4 M6×90 screws and the roof.

Here the fourth wall is the **window wall** (without the lock hole), and the **platform side without the recess** goes on its side.

On this tower: **orange striped** on the bridge side, facing the orange striped wall of the center tower; **orange with dots** on the ramp side; **yellow striped** on the slide side.

> Set the 3 towers in an "L", with the center tower at the corner, leaving about 80 cm between the platforms. The bridges set the exact distance in the next step.

PARTS FOR THIS STEP


- **1×** Roof ref. 998705
- **1×** Orange wall with dots ref. 998706
- **1×** Yellow striped wall ref. 998707
- **2×** Leg ref. 998708
- **1×** Platform ref. 998711
- **4×** Tube 2000 ref. 998712
- **1×** Orange striped wall ref. 998726
- **4×** EVA seal (spacer) ref. 998728
- **1×** Window wall ref. 1000903
- **8×** M8 flat washer two on each M8×70 screw
- **4×** M8 self-locking nut, yellow ref. 2090323
- **4×** M8×70 hex screw (fully threaded) ref. 2090329
- **4×** Washer one on each screw
- **4×** M6×90 hex screw ref. 2090460

STEP 12 OF 19


12 Bridges



A Second bridge (center tower – second tower): fixed the same way

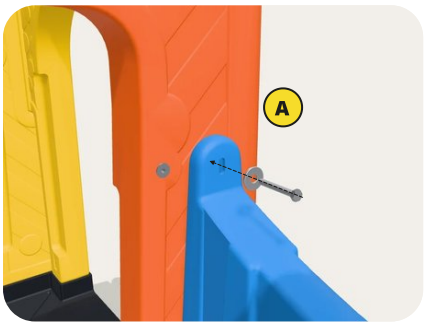

At the top: bridge tab on the wall

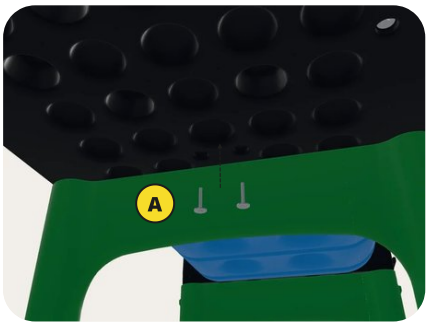

At the bottom: under the platform

Fit the 2 bridges: one between the center tower and the swing tower (orange walls with dots) and the other between the center tower and the second tower (orange striped walls). Each bridge takes **8 M6×45 screws with washer**.

At the top: each bridge has **4 tabs**, 2 at each end. Each tab takes **1 screw with washer**, which goes through the tab and screws into the **wall rivet nut**.


At the bottom: 2 screws under each platform, from below.

CAUTION
Items fixed to the platform (bridges, slides and ramps) must be screwed **from below**, in addition to the fixings on the walls.

PARTS FOR THIS STEP

- **2×** Bridge ref. 1000902
- **16×** M6×45 hex screw ref. 2090194
- **16×** Washer one on each screw

SCREW AND TOOL




Tool: **10 mm wrench.**



How it looks at the end of step 12

STEP 13 OF 19

13 Slides

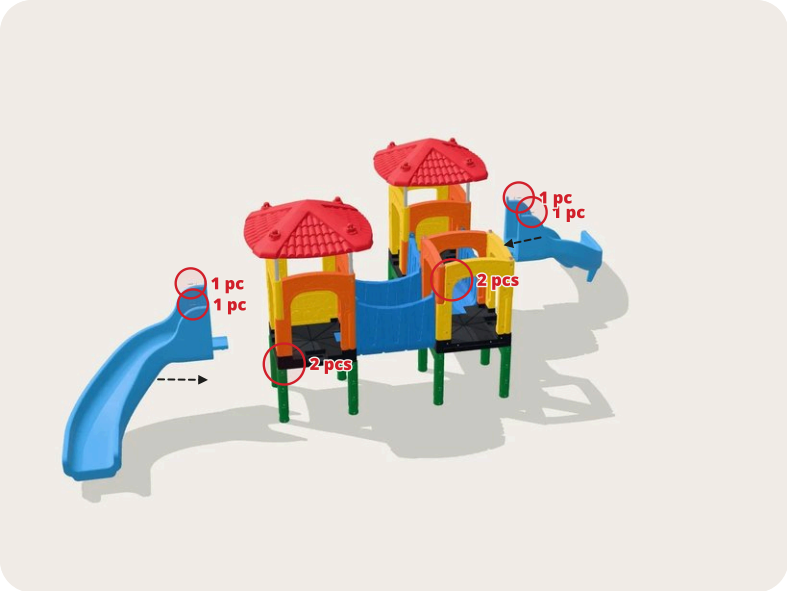


Fit the 2 slides: one on the swing tower (orange striped wall) and the other on the second tower (yellow striped wall). Screw them with **8 M6×45 screws with washer**.

Each slide has **2 fixing points on the wall** (1 screw on each tab, into the wall rivet nut) and **2 on the platform**, from below.

PARTS FOR THIS STEP

- **2×** Slide ref. 998703
- **8×** M6×45 hex screw ref. 2090194
- **8×** Washer one on each screw


SCREW AND TOOL




Tool: **10 mm wrench.**



How it looks at the end of step 13

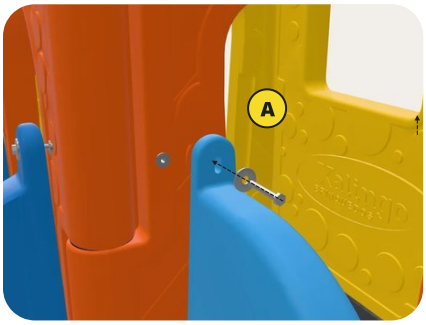


At the top: slide tab on the wall

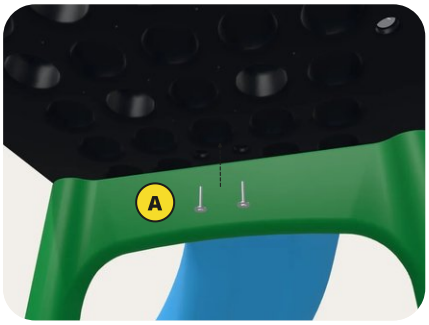

At the bottom: under the platform

STEP 14 OF 19

14 Ramps (climbers)

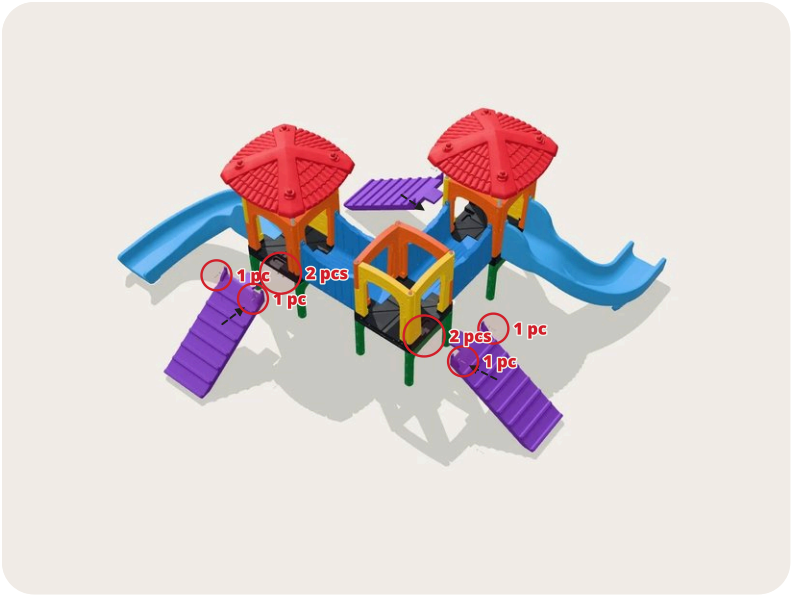


Fit the 3 ramps: on the center tower and on the swing tower (yellow striped walls) and on the second tower (orange wall with dots). Screw them with **12 M6×45 screws with washer**.

Each ramp has **2 fixing points on the wall** and **2 on the platform**, from below.


PARTS FOR THIS STEP

- **3×** Climbing ramp ref. 998704
- **12×** M6×45 hex screw ref. 2090194
- **12×** Washer one on each screw


SCREW AND TOOL




Tool: **10 mm wrench.**



How it looks at the end of step 14

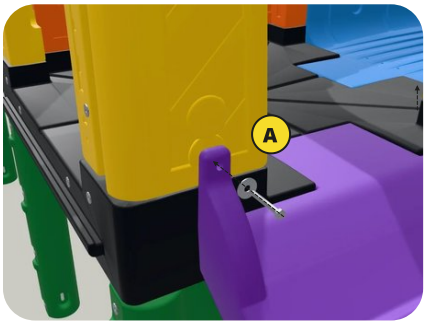

At the top: ramp tab on the wall

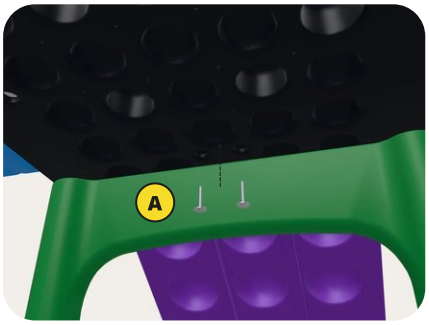

At the bottom: under the platform

STEP 15 OF 19


15 Tunnel slide bases



A Base on the front part of the tunnel: 2 M6×45 screws + washer

B Small cross bars join the two bases: 4 screws

SCREW AND TOOL

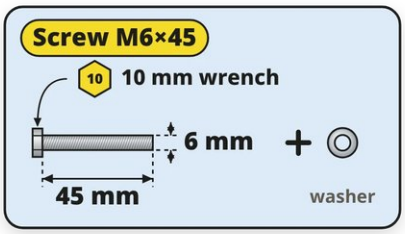

Tool: **10 mm wrench**.

With the tunnel on the ground, next to the playground, fit one of the bases on the **front part** of the tunnel slide and screw it on (**2 M6×45 screws with washer**).

Place the second base and screw on the **2 small cross bars** to join the two bases (**4 M6×45 screws with washer**).

PARTS FOR THIS STEP

- **2×** Small crossbar ref. 953203
- **1×** Tunnel slide ref. 998702
- **2×** Tunnel slide base ref. 998714
- **6×** M6×45 hex screw ref. 2090194
- **6×** Washer one on each screw




How it looks at the end of step 15

STEP 16 OF 19

16 Tunnel slide on the center tower



A 12 M6×45 screws + washer around the tunnel mouth

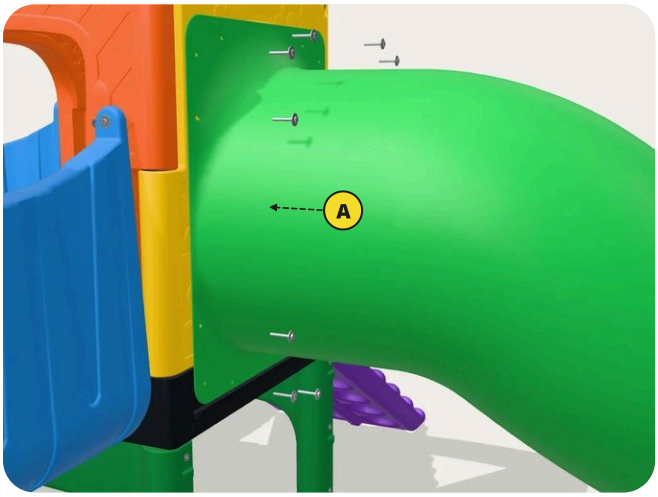

Tunnel mouth screws

A M6×45 screw + washer, 3 on each end of the tunnel mouth

Fit the tunnel slide on the **yellow wall with dots** of the center tower and screw it with **12 M6×45 screws with washer**: 3 on each of the 4 ends of the tunnel mouth, from the outside in, into the wall rivet nuts.

PARTS FOR THIS STEP




12× M6×45 hex screw ref. 2090194



12× Washer one on each screw

SCREW AND TOOL



Tool: **10 mm wrench**.




How it looks at the end of step 16

STEP 17 OF 19

17 Red support and basketball hoop



A Basketball hoop on the outside of the support

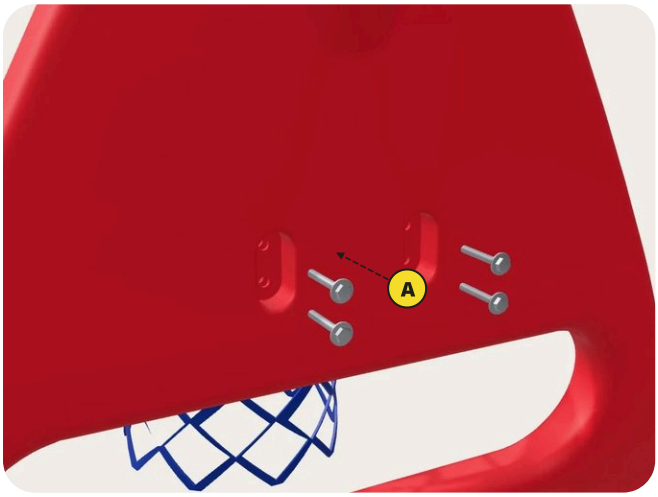

Hoop screws, from the inside of the support

A 4 M6×45 screws + washer, from the inside of the support, into the hoop rivet nuts

Fit the **basketball hoop** on the outside of the red swing-set support.

Fix it with **4 M6×45 screws with M8 flat washer**, put in from the inside of the support into the hoop rivet nuts.

PARTS FOR THIS STEP



1× Red swing-set support ref. 975408



1× Basketball hoop ref. 988702




4× M8 flat washer one on each screw



4× M6×45 hex screw ref. 2090194

SCREW AND TOOL




Tool: **10 mm wrench.**




How it looks at the end of step 17


STEP 18 OF 19

18 Swing beam

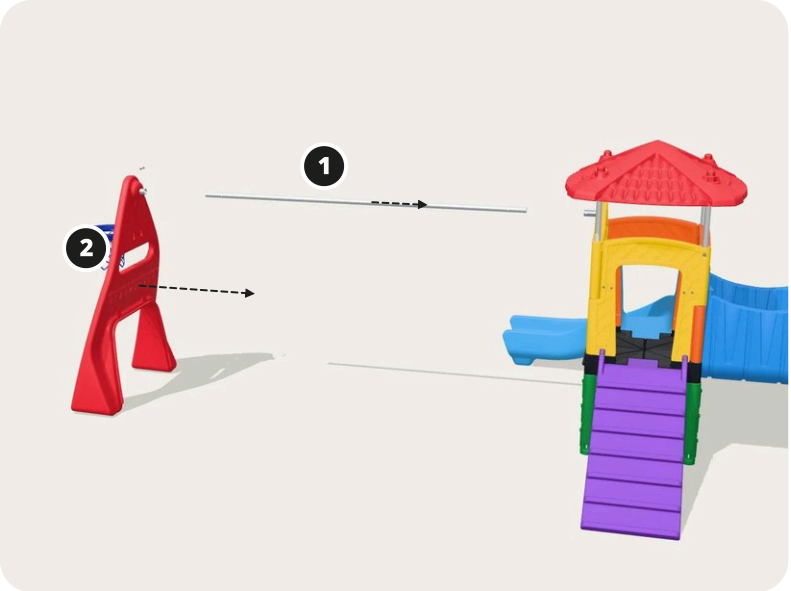

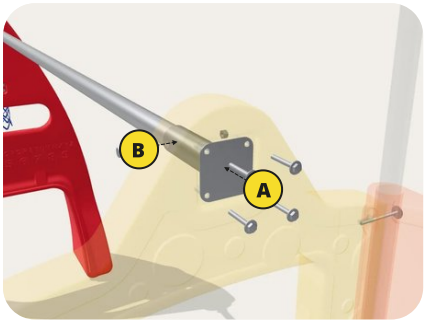

Lock on the inside of the swing tower

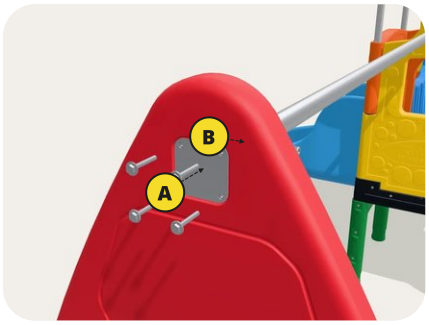

Lock on the outside of the red support

Metal locks: fit one lock on the inside of the swing tower, with the sleeve coming out through the hole in the swing window wall, and the other on the outside of the red support, at the top. Each lock takes **4 M6×45 screws with M8 flat washer**, into the rivet nuts.

1. Fit one end of the 2450 mm tube into the tower lock. **2.** Bring the red support closer, fitting the other end of the tube into its lock.


At each end, fix the tube to the lock with **1 screw 5/16" × 2 1/4"** and a **self-locking nut**, going through the lock and the tube.

> The red support stays lined up with the tower, with the tube level. It is filled with water before use (step 19).


PARTS FOR THIS STEP

2× Swing beam metal lock ref. 954312	**1×** 1.5" swing beam (2450) ref. 954314
8× M8 flat washer one on each screw	**8×** M6×45 hex screw ref. 2090194
2× 5/16" self-locking nut ref. 2090370	**2×** 5/16" × 2 1/4" hex screw ref. 2090392

SCREWS AND TOOLS



Tool: **10 mm wrench.**




Tool: **2 × 13 mm wrenches:** one holds the nut while the other turns the screw.




How it looks at the end of step 18

STEP 19 OF 19

19 Swings

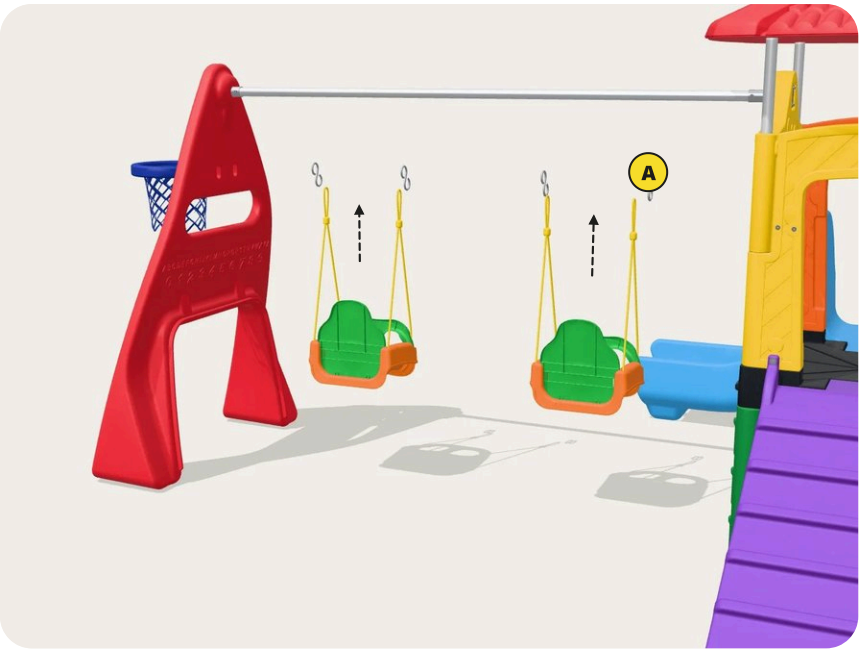

A Rope hooks in the center position

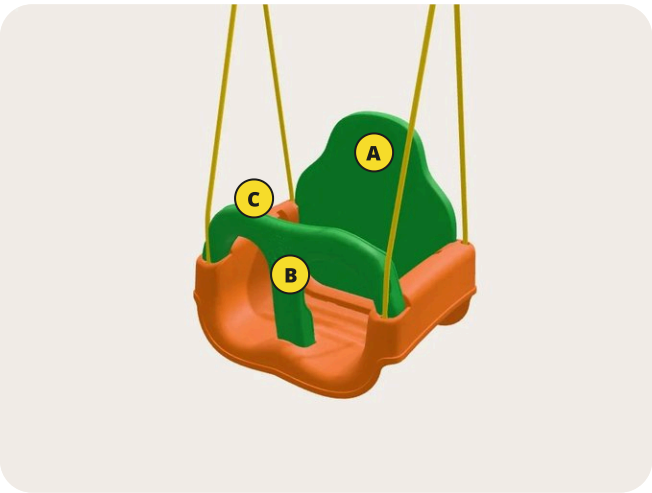

A Backrest: position A (up to 24 months) or B (up to 36 months)

B Front guard with the safety belt

C Rope through the holes in the base, with a figure-eight knot under the seat

The swings come already assembled; check them when installing. **Backrest:** fit it on the seat until it clicks, in **position A** for children up to 24 months or in **position B** up to 36 months.

Safety belt: pass the part of the belt without the buckle through the slots of the backrest, wrapping around it, with the loose ends to the front. Place the "T" strap guide on the inside of the swing frame and fasten the buckle with the **grooved side up**.

Ropes: they go through the holes in the base, sitting in the groove of the guard, with a **figure-eight knot** on each front part, under the seat, and are locked in the fins at the lower back of the seat.

Hang the 2 swings on the tube with the **hooks** at the ends of the ropes, in the **center position** shown.

CAUTION

Before use, fill the red support with water through the filling valve, up to the level of the valve itself. Adding 50 g of chlorine through the valve every 120 days is recommended, to prevent microorganisms and insects. Maximum load of **23 kg on each swing**; the swings must not be replaced with other models.

Whoever installed it is responsible for checking the knots under the swing and putting their own weight on the seat, to make sure it is safe to use. **Always use the safety belt** adjusted to the child. The swing grows with the child: to adapt it, remove the backrest and the guard by the latches under the seat.


PARTS FOR THIS STEP



2× Swing
ref. 2501002

FASTENING DETAILS

How each part is screwed on

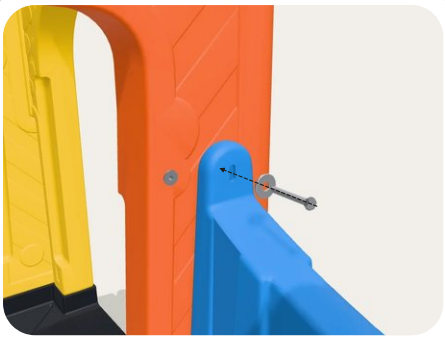

Bridge

M6×45 screw + washer through the bridge tab, into the wall rivet nut. 4 tabs per bridge, 1 screw on each.




Slide

M6×45 screw + washer through the slide tab, into the wall rivet nut. 2 per slide.




Climber (ramp)

M6×45 screw + washer through the ramp tab, into the wall rivet nut. 2 per ramp.

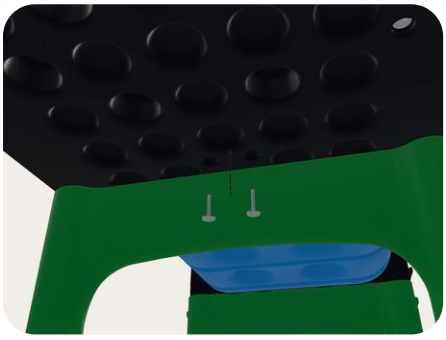


Bottom fixing

Bridges, slides and ramps: 2 M6×45 screws + washer under the platform, always from below.

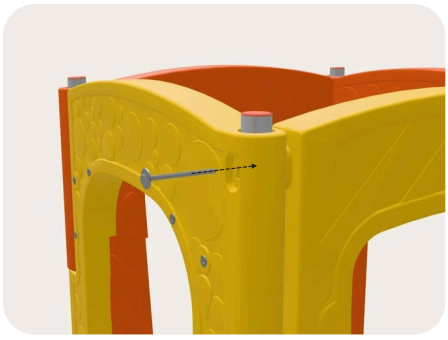


Wall

M6×90 screw + washer, from the outside in, through both walls and the tube. 1 at each corner.

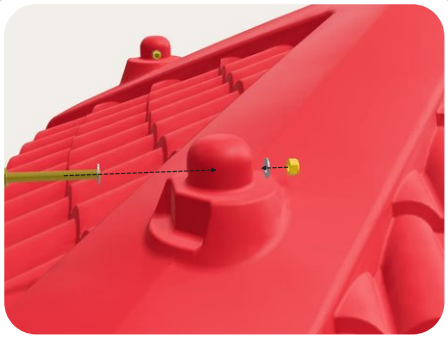


Roof

M8×70 screw with an M8 flat washer on both sides and an M8 self-locking nut. 1 set on each tube.

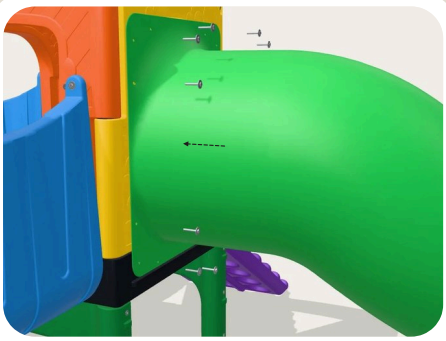


Tunnel slide

M6×45 screw + washer, 3 on each end of the tunnel mouth, into the rivet nuts of the yellow wall with dots.

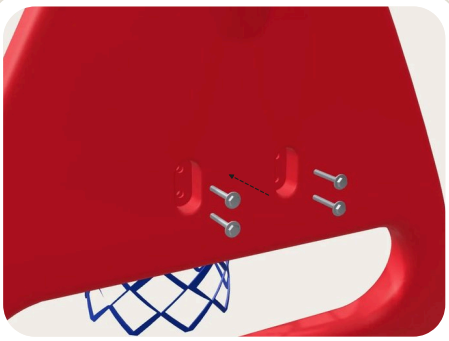

Basketball hoop

4 M6×45 screws + M8 flat washer, from the inside of the red support, into the hoop rivet nuts.

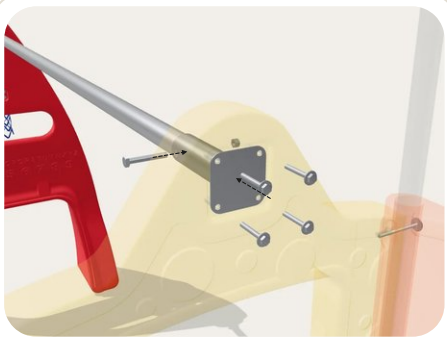

Swing beam

Lock fixed with 4 M6×45 screws + M8 flat washer; the tube is locked with a 5/16" × 2 1/4" screw and self-locking nut.



Assembly complete

Check the product visually, making sure every part is fitted and firmly fastened. **Only then let children use it.**

Before releasing it for use, fill the red swing-set support with water. Maximum load of 23 kg on each swing; always use the safety belt.

INSTALLATION DETAILS

Location and safety area

To keep users safe, minimum spaces and free distances must be respected.

Circulation area: at least 1.20 m wide around the equipment, so users can run freely; at least 1.50 m where the path changes direction, so strollers and wheelchairs can get in and turn.

Fall space: neighboring static equipment with overlapping fall spaces must be at least 1.50 m apart for a fall height of up to 600 mm, and 2.50 m for higher falls. Maximum fall height of this product: **700 mm**.

Slide landing area: at least 1000 mm from the sides of the run-out section and 2000 mm (type 01 run-out) or 1000 mm (type 02 run-out) from the end of the run-out section.

Ground: an even, continuous, stable surface that is non-slip in any weather, with no obstacles and a cross slope of no more than 2%. Use on grass, sand, carpet or another soft, level surface.

Location: first check for chemicals and loose material (rubble, sharp objects). Choose an airy place with morning sun, sheltered from drafts; do not install it in basements or garages. Never use it near stairs, roads, swimming pools, water or slippery places. If the area is fenced, the gates must open outwards and be at least 1 m wide.

Swing set: swing equipment side by side must have at least **1.50 m** between the frame projection of one and the seat of the other; static equipment next to swings, at least **2.50 m** from the frame projection to the swing seat. The impact-absorbing surface must be at least **1.75 m** wide.

Area reserved for installation and slide impact: about **6.7 × 5.2 m**.

Red swing-set support: before use, fill it with water through the filling valve up to the level of the valve itself; 50 g of chlorine through the valve every 120 days is recommended. Maximum load of 23 kg on each swing.

To avoid accidents, the child should wear shoes. This product is not intended for commercial use.

INSPECTION AND MAINTENANCE

Keep the playground safe

Visual inspection — daily

- Cleanliness
- Free distances between the ground and the equipment
- Ground surface finish and exposed foundations
- Sharp edges and missing components
- Excessive wear and structural integrity

Operational inspection — every 1 to 3 months

Pay special attention to the structural integrity of the product, besides the items of the visual inspection.

Main inspection — yearly

- Structure: bending, deformation and cracks
- Finish: cracks, chips, broken or open joints
- Missing, bent, broken, loose or worn parts
- Edges, pinch points, access points and protective surfaces
- Swings: seats, rope knots, hooks and water in the red support

Maintenance

- Tighten the joining parts and clean (do not use paints, solvents or other chemicals)
- Keep the free spaces and drain holes clean
- Replace fasteners and faulty or worn parts

As per NBR 16071-7:2012. Any change that affects safety only after consulting the manufacturer.

XALINGO S/A INDÚSTRIA E COMÉRCIO – EM RECUPERAÇÃO JUDICIAL
BR 471, km 147 – Santa Cruz do Sul – RS – Brasil – CEP 96835-642
CNPJ 95.425.534/0001-76

SAC
(51) 3719-9800 · sac@xalingo.com.br
www.xalingo.com.br

Bridge Play · ref. 1004.3
Keep this manual for future reference.