Ilha dos Fofossauros

ref. 1008.7

ASSEMBLY INSTRUCTIONS

Assembly video on YouTube:
youtu.be/Z4eFzEBvd80



Product size: **12.8 × 4.5 × 7.3 ft (3.90 × 1.37 × 2.23 m)**
One tower with 4 dinosaur walls, climbing ramp, 3-section slide, climbing wall and 2 tree tops
Age range: 3 to 8 years
Assembly by an adult — one person can do it alone.
15 steps · keep this manual for future reference.

BEFORE YOU START

Read carefully

Caution

Give this toy to the child only after it has been **assembled by an adult**, and always use it under **adult supervision**.

Assembly rules

- Follow the tube orientation: the **single hole goes at the bottom**, lined up with the hole in the leg, and the **top holes go up**.
- Every screw must go in with a **washer**, for a more even and secure tightening.
- Walls always with the **rivet nuts facing out**, and always an **EVA spacer** between two walls.
- The ramp, the slide and the platform cover are screwed to the platform **from below**.

Tools




- **10 mm open-end or combination wrench**: M6×45 screws (12 pcs, steps 1, 2, 11 and 14) and M6×90 screws (4 pcs, step 10)
- **13 mm open-end or combination wrench**: M8×40 screws (4 pcs, steps 12 and 13)
- **2 × 13 mm wrenches** (or a wrench + a 13 mm socket): 5/16" × 2" screws with nut (8 sets, steps 12 and 13) and 5/16" × 2 1/4" screws with nut (2 sets, step 15). One holds the nut while the other turns the screw.
- Pliers


There are no specific tightening torques for the fasteners. The rivet nuts come already fitted in the parts.

Screws in this playground


Each type has its own color. The same card appears in each step and in the assembly video.




12× Screw M6×45 · steps 1, 2, 11 and 14

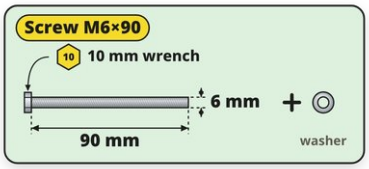


4× Screw M6×90 · step 10

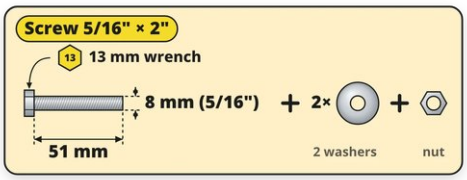

8× Screw 5/16" × 2" · steps 12 and 13



4× Screw M8×40 · steps 12 and 13

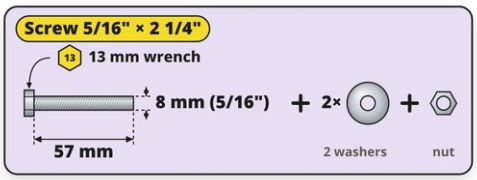

2× Screw 5/16" × 2 1/4" · step 15

PARTS LIST

Ilha dos Fofossauros parts



BROWN PLATFORM 1×
No. 1 · ref. 1022110



LEG 1×
No. 2 · ref. 998708



FOFOSSAUROS CLIMBING WALL 1×
No. 3 · ref. 1022103



PLATFORM COVER 1×
No. 4 · ref. 1022105

TUBE 2210 mm 2×
No. 5 · ref. 1022130

TUBE 1550 mm 2×
No. 6 · ref. 1003202



TUBE CAP 2×
No. 7 · ref. 1100137




GREEN FOFOSSAURO TRIX WALL 1×
No. 8 · ref. 1022101



YELLOW WALL WITH DOTS 1×
No. 9 · ref. 998727



ORANGE FOFOSSAURO TRIX WALL 1×
No. 10 ·
ref. 1022111



PURPLE FOFOSSAURO SCOT WALL 1×
No. 11 ·
ref. 1022102



EVA SEAL 4×
No. 12 · ref. 998728



BLUE CLIMBING RAMP 1×
No. 13 ·
ref. 1022114



SLIDE – ENTRY SECTION 1×
No. 14 ·
ref. 1022107



SLIDE – STRAIGHT SECTION 1×
No. 15 ·
ref. 1022108



SLIDE – EXIT SECTION 1×
No. 16 ·
ref. 1022109



TREE TOP 2×
No. 17 ·
ref. 1022104



HEX SCREW M6 × 45 mm 12×
No. 18 ·
ref. 2090194



HEX SCREW M6 × 90 mm 4×
No. 19 ·
ref. 2090460



HEX SCREW 5/16" × 2" 8×
No. 20 ·
ref. 1090113



HEX SCREW 5/16" × 2 1/4" 2×
No. 21 ·
ref. 2090392



HEX SCREW M8 × 40 mm 4×
No. 22 ·
ref. 2090320



5/16" SELF-LOCKING NUT 10×
No. 23 ·
ref. 2090370



WIDE FLAT WASHER 40×
No. 24 ·
ref. 2090347



RIVET NUT 8SJN-M6 46×
No. 25 ·
ref. 2090183 ·
already fitted


PRODUCT ASSEMBLY

Step by step

In each step, the arrows show where the part goes, the **black numbers** give the order and the **yellow letters** point to the details explained under the picture.


1 STEP 1 OF 15

Base: leg, climbing wall and platform

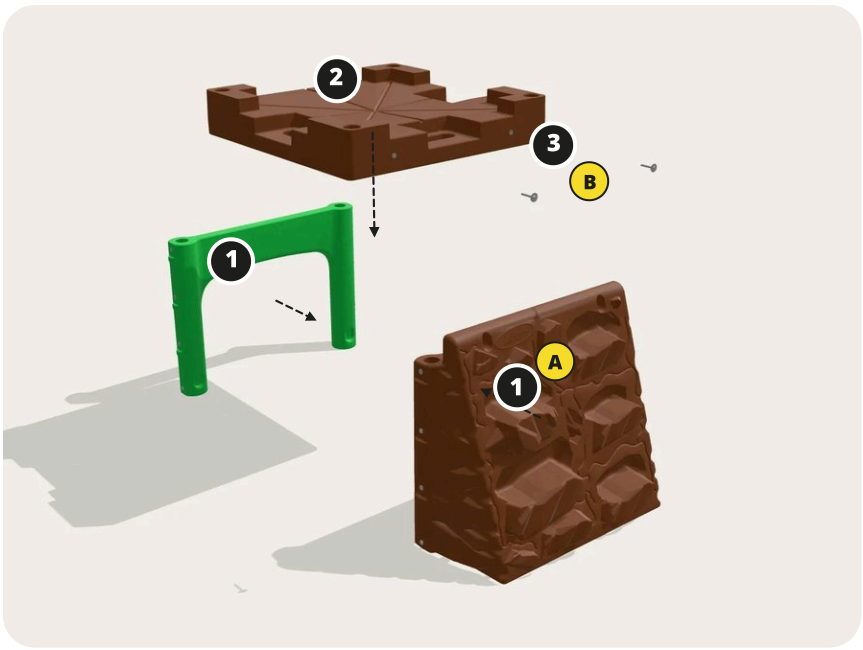

A Brown climbing wall: it is the legs on the yellow wall side

B 2 M6×45 screws + washer hold the climbing wall to the platform

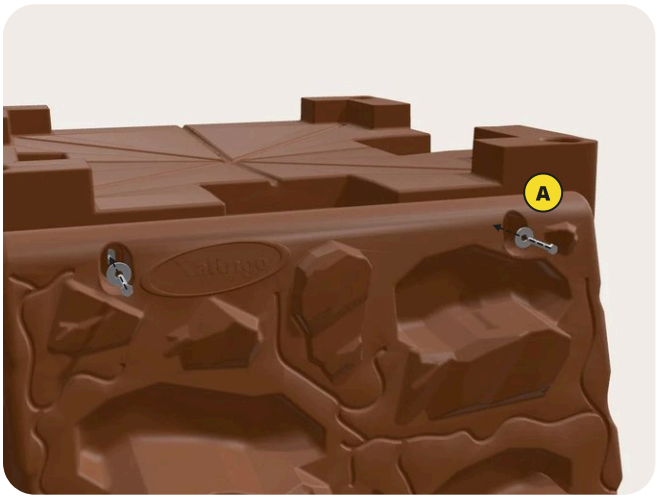

Climbing wall screw into the platform

A M6×45 screw + washer, from the outside of the climbing wall into the platform

Place the **green leg** and the **brown climbing wall**: the climbing wall is the legs on the other side of the playground.

Put the **brown platform** on top of both parts.

Fasten the climbing wall to the platform with **2 M6×45 screws with washer**, put in from the outside of the climbing wall.

> Assemble the playground where it will be used, on level ground: once built, it is heavy to move.

PARTS FOR THIS STEP



1× Leg
ref. 998708



1× Climbing wall
ref. 1022103



1× Brown platform
ref. 1022110




2× M6×45 hex screw
ref. 2090194



2× Washer
one on each screw

SCREW AND TOOL




Tool: **10 mm wrench.**



How it looks at the end of step 1


STEP 2 OF 15

2 Platform cover

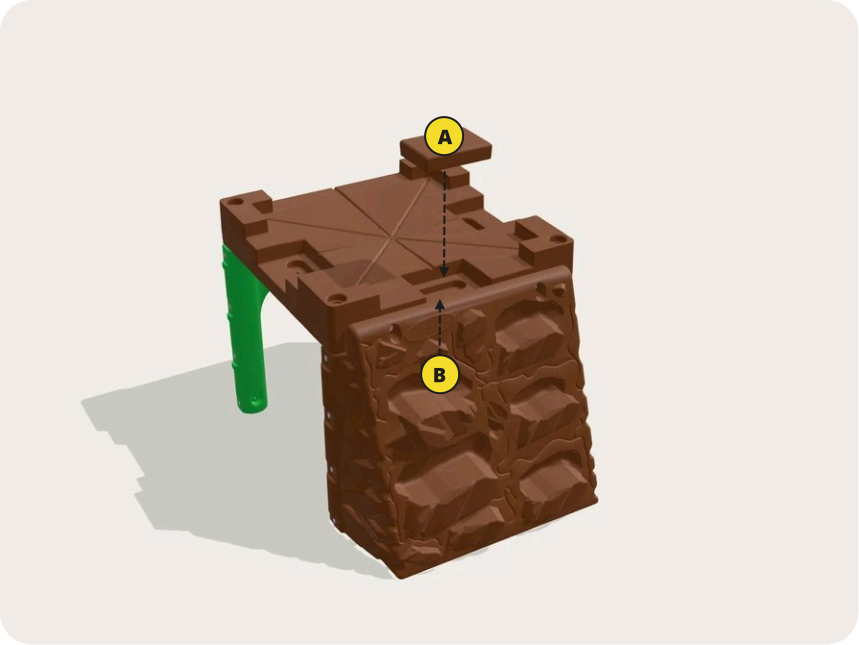

A Platform cover: fit it on the platform, on the climbing wall side

B 2 M6×45 screws + washer under the platform, from below

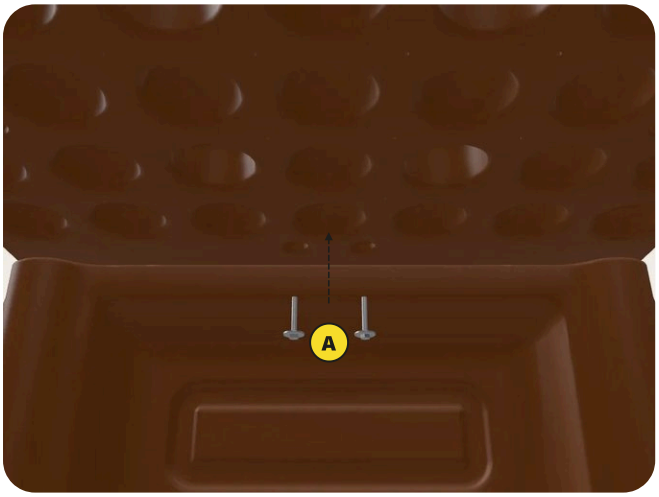

Under the platform

A Under the platform: screw in from below

Fit the **platform cover** (the brown block) on the platform, on the climbing wall side.

Screw it from under the platform with **2 M6×45 screws with washer**, from below.

PARTS FOR THIS STEP



1× Platform cover ref. 1022105




2× M6×45 hex screw ref. 2090194



2× Washer one on each screw

SCREW AND TOOL




Tool: **10 mm wrench.**



How it looks at the end of step 2

STEP 3 OF 15

3 Tubes

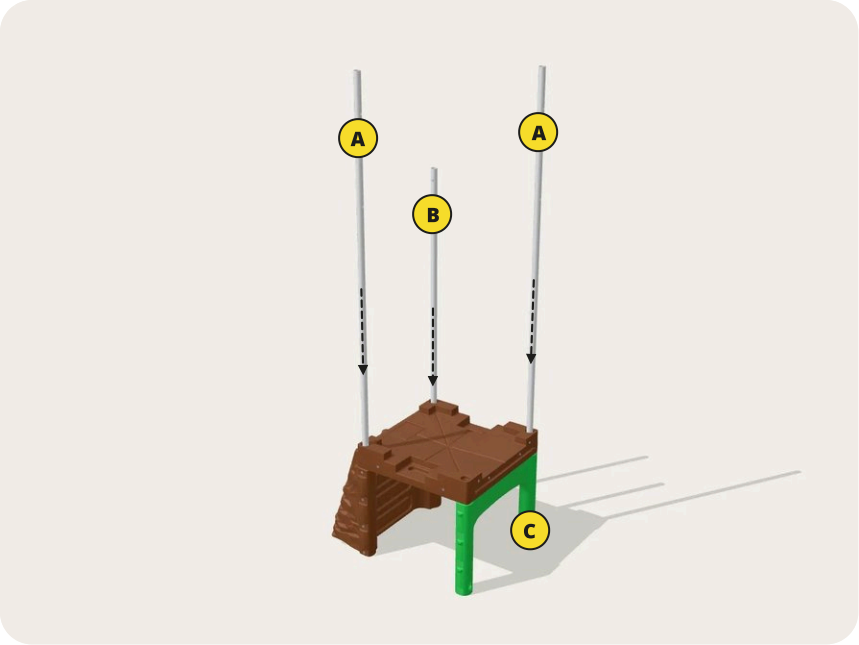

A Long tubes (2210 mm): the tree tops go on them

B Short tube (1550 mm)

C The tube's single hole down, lined up with the hole in the leg



The tube's bottom hole lined up with the leg

A Tube hole lined up with the hole in the leg

Insert the **2 long tubes (2210 mm)** in the corners shown, down to the bottom of the legs: the tree tops go on them.

Insert **1 short tube (1550 mm)** in the corner shown. The other short tube goes in at step 9.

CAUTION
Tube orientation: the **single hole goes down**, lined up with the hole in the leg, and the **top holes stay at the top**.

PARTS FOR THIS STEP

1× Tube 1550 (short) ref. 1003202


2× Tube 2210 (long) ref. 1022130



How it looks at the end of step 3

STEP 4 OF 15

4 Identify the walls

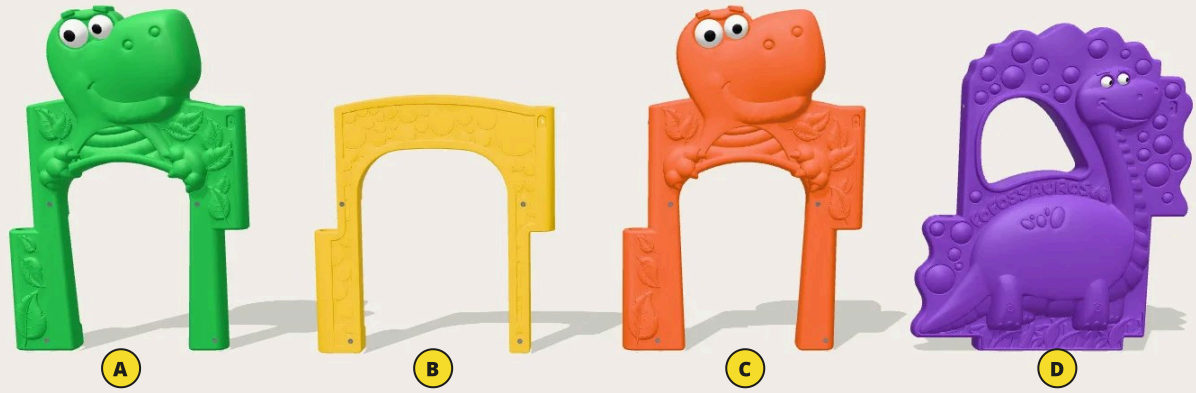

- **A** Green Trix: slide side
- **B** Yellow dotted: climbing wall side
- **C** Orange Trix: ramp side
- **D** Purple Scot: the last one, swings shut


The Ilha dos Fofossauros has **4 walls**: the dinosaurs **green Trix**, **orange Trix** and **purple Scot**, and the **yellow wall with dots**.

Green Trix: slide side. **Yellow with dots**: climbing wall side. **Orange Trix**: ramp side. **Scot**: the last wall, opposite the climbing wall.

CAUTION
When fitting the walls, always keep the **rivet nuts facing out**: they hold the ramp and the slide.

STEP 5 OF 15

5 Green Trix wall

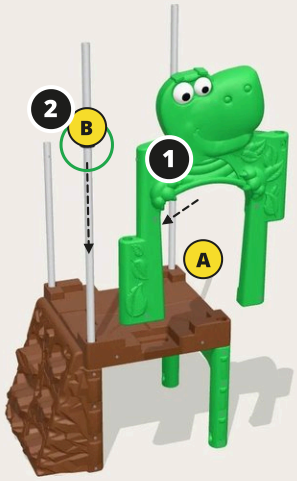

A Green Trix: slide side

B EVA spacer on top, in the corner, before the next wall

Fit the **green Trix** wall down the tubes, on the side where the **slide** goes.

Put an **EVA spacer** on top, in the corner where the next wall will rest.

CAUTION
The EVA spacer goes **on top, before** the wall that closes that corner: there is always an EVA spacer between two walls.

PARTS FOR THIS STEP


1× EVA seal (spacer) ref. 998728

1× Green Fofossauro Trix wall ref. 1022101



How it looks at the end of step 5

6 STEP 6 OF 15
Yellow dotted wall

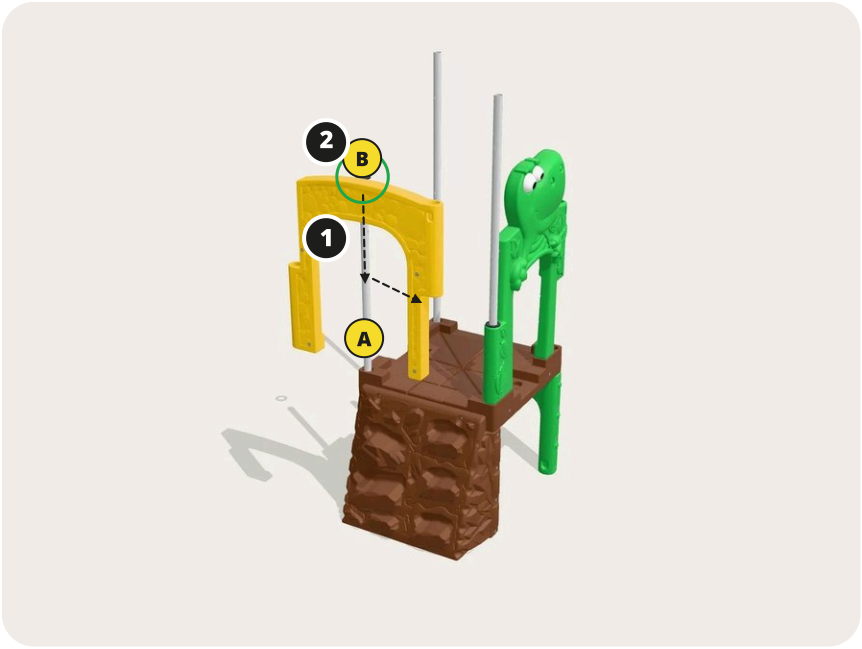

A Yellow dotted: climbing wall side

B EVA spacer on top, in the corner, before the next wall

Fit the **yellow dotted** wall down the tubes, on the **climbing wall** side.

Put the next **EVA spacer** on top, in the next corner.

PARTS FOR THIS STEP


1× Yellow wall with dots
ref. 998727

1× EVA seal (spacer)
ref. 998728



How it looks at the end of step 6

7 STEP 7 OF 15
Orange Trix wall

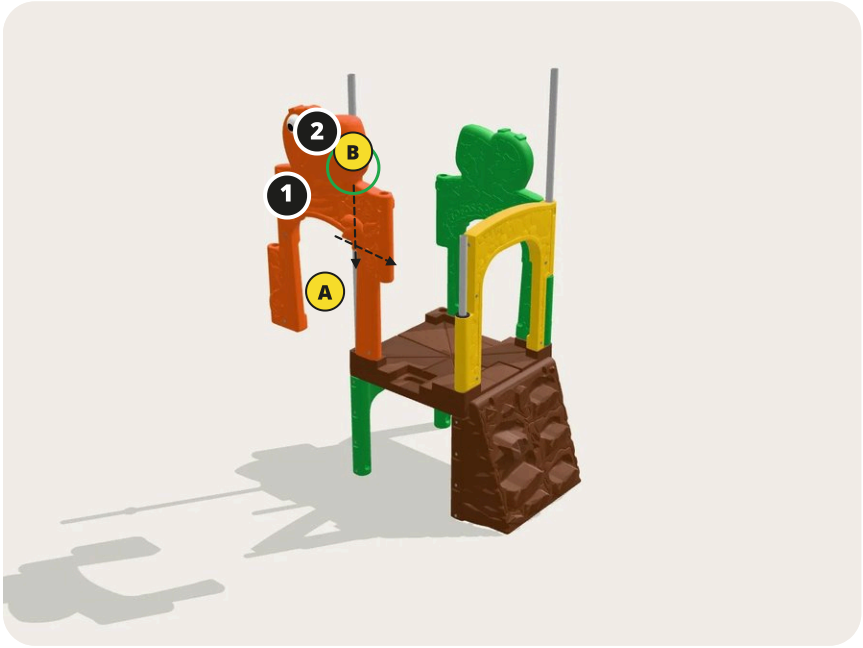

A Orange Trix: ramp side

B EVA spacer on top, in the corner, before the next wall


Fit the **orange Trix** wall down the tubes, on the **ramp** side.

Put the third **EVA spacer** on top, in the other corner.

PARTS FOR THIS STEP

1× EVA seal (spacer)
ref. 998728


1× Orange Fofossauro Trix wall
ref. 1022111

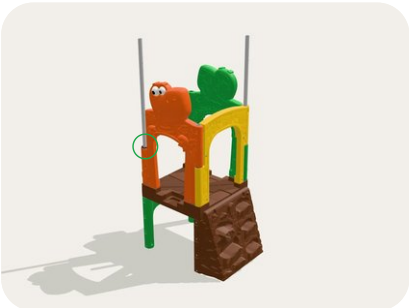

How it looks at the end of step 7

STEP 8 OF 15

8 Scot wall

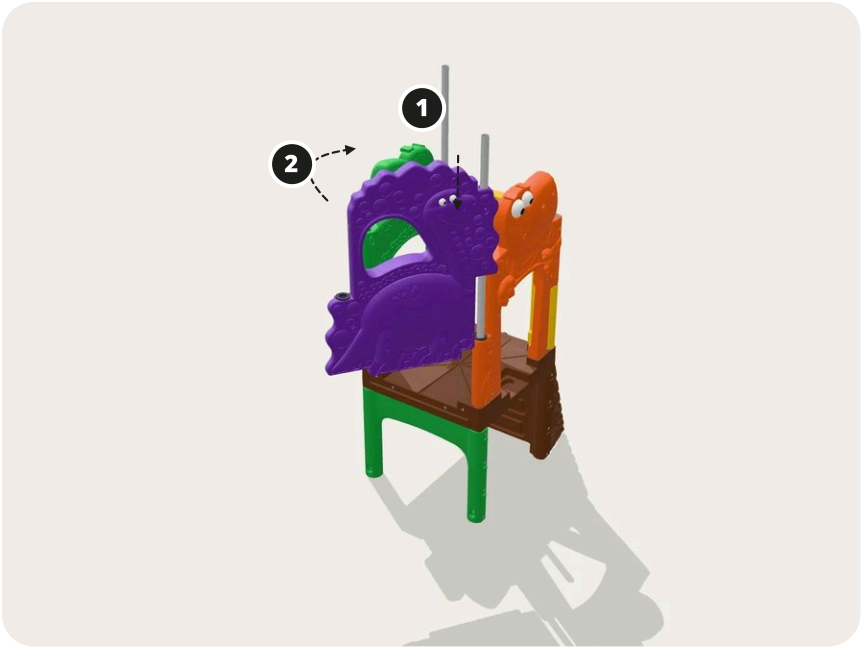

Fit the last **EVA spacer** on the **Scot** wall, in the corner that will meet the green Trix.

1. Fit the end of the Scot onto the **long tube** in the orange Trix corner and slide the wall straight down, **swung open outward**.

2. With the wall resting on the platform, **swing it around the tube** until it closes against the **green Trix**.


PARTS FOR THIS STEP



1× EVA seal (spacer) ref. 998728




1× Purple Fofossauro Scot wall ref. 1022102

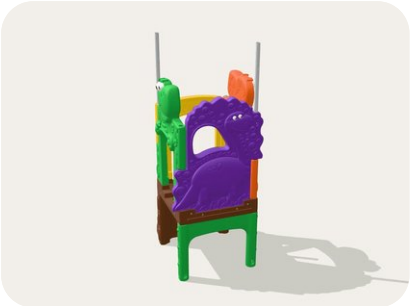

How it looks at the end of step 8

STEP 9 OF 15

9 Last tube and caps

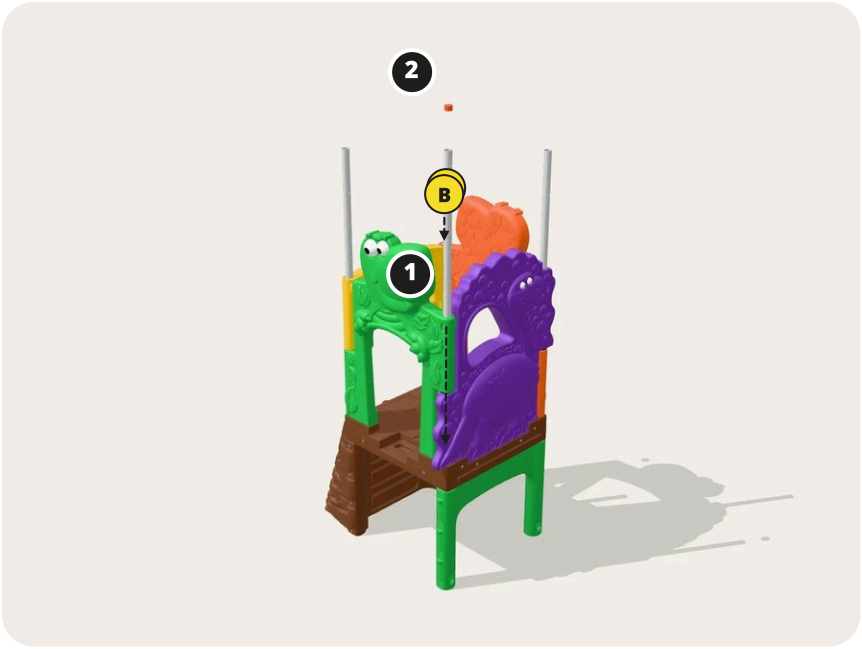

A Slide down the last tube (1550 mm): it locks the walls

B Caps on top of the 2 short tubes

Slide the **last short tube (1550 mm)** down the corner between the Scot and the green Trix, single hole down: it goes through the walls and the EVA and locks everything together.

Fit the **2 caps** on top of the 2 short tubes.

PARTS FOR THIS STEP

1× Tube 1550 (short) ref. 1003202

2× Tube cap ref. 1100137



How it looks at the end of step 9

STEP 10 OF 15

10 Join the walls



A 4 M6×90 screws go through the tubes (1 in each corner)



M6×90 screw going through the tube

A M6×90 screw + washer, from the outside in

Join the walls with **4 M6×90 screws with washer**, 1 in each corner, put in **from the outside in**.


The tubes have through holes for the screws.

PARTS FOR THIS STEP

4× Washer
one on each screw

4× M6×90 hex screw
ref. 2090460

SCREW AND TOOL



Tool: **10 mm wrench**.




How it looks at the end of step 10


STEP 11 OF 15

11 Climbing ramp



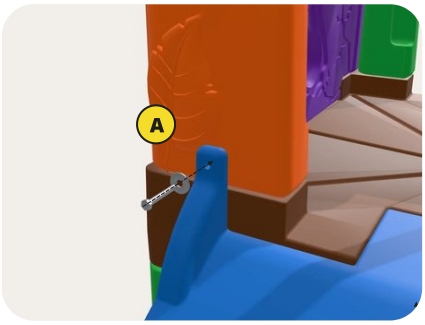

At the top: ramp tab on the wall

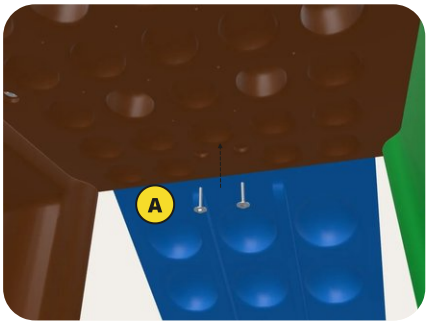

Below: under the platform

Fit the **blue ramp** on the **orange Trix** side and screw it with **4 M6×45 screws with washer**.

At the top: 1 screw in each ramp tab, into the wall's rivet nut.

Below: 2 screws under the platform, from below.

CAUTION
Items fixed to the platform (ramp and slide) must be screwed **from below**, besides the fixings on the walls.


PARTS FOR THIS STEP

1× Blue climbing ramp ref. 1022114

4× M6×45 hex screw ref. 2090194

4× Washer one on each screw

SCREW AND TOOL




Tool: **10 mm wrench**.



How it looks at the end of step 11

STEP 12 OF 15


12 Slide: entry and straight sections

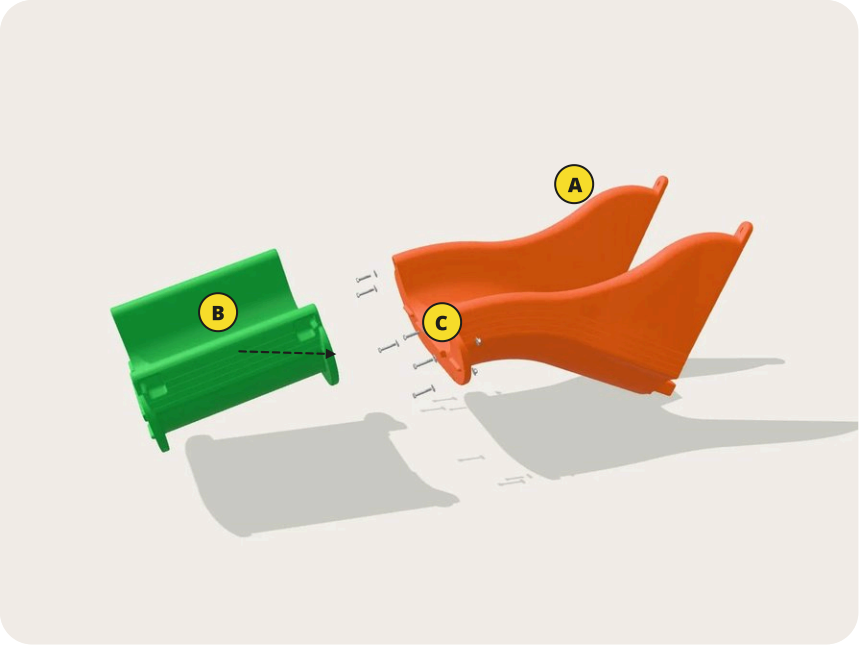

A Put the slide together on the ground, apart from the tower


B The straight section fits under the entry section

C On each side: 2 5/16" screws + 1 M8×40 screw



On the flange: 5/16" × 2" screw with nut

A On the flange: 5/16" × 2" screw + washer on both sides + nut (through both sections)



In the recess: M8×40 screw into the rivet nut

A In the recess: M8×40 screw + washer, screwed into the M8 rivet nut

Put the slide together **on the ground, apart from the tower**, in front of the **green Trix**.

Fit the **straight section** (green) under the end of the **entry section** (orange).

On the **flange**: **4 5/16" × 2" screws**, each with a **washer on both sides** and a **self-locking nut**.

In the **recess**, at the top: **2 M8×40 screws with washer**, screwed into the M8 rivet nuts.

CAUTION

Do not swap the screws. The **5/16" × 2"** goes on the **flange**, through both sections, with a washer on both sides and a nut. The **M8×40** goes in the **recess**, with a washer, screwed into the **M8 rivet nut**. Never force the 5/16" into the rivet nut: it ruins the rivet nut and the part.

Use 2 13 mm wrenches on the 5/16" screws: one holds the nut and the other turns the screw.


PARTS FOR THIS STEP

- **1×** Slide: entry section ref. 1022107
- **1×** Slide: straight section ref. 1022108
- **4×** 5/16" × 2" hex screw ref. 1090113
- **2×** M8×40 hex screw ref. 2090320
- **10×** Washer two on each 5/16" screw; one on each M8×40
- **4×** 5/16" self-locking nut ref. 2090370

SCREWS AND TOOLS



Tool: 2 × 13 mm wrenches: one holds the nut while the other turns the screw.




Tool: 13 mm wrench.



How it looks at the end of step 12


STEP 13 OF 15

13 Slide: exit section

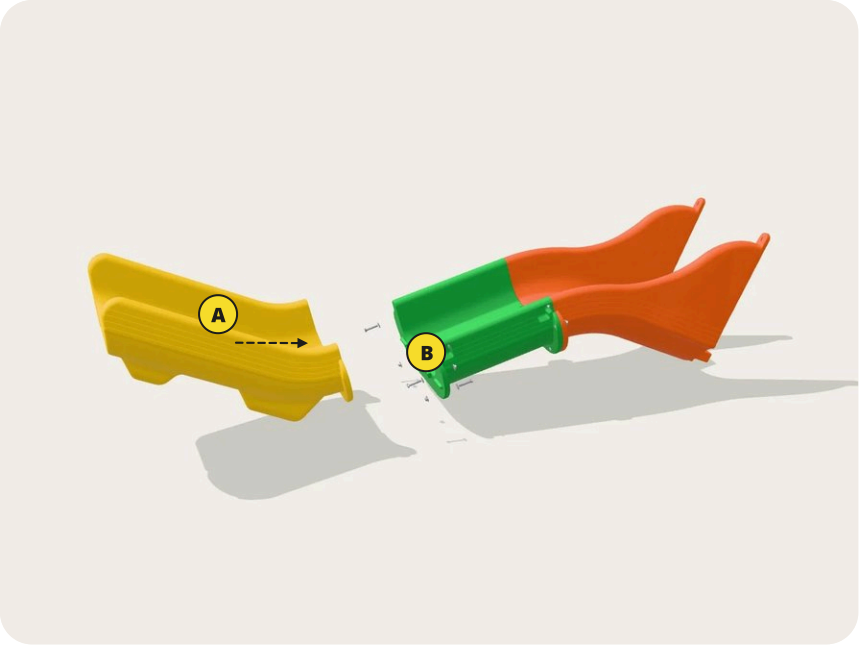


A The exit section fits under the straight section

B On each side: 2 5/16" screws + 1 M8×40 screw



On the flange: 5/16" × 2" screw with nut

A On the flange: 5/16" × 2" screw + washer on both sides + nut (through both sections)



In the recess: M8×40 screw into the rivet nut

A In the recess: M8×40 screw + washer, screwed into the M8 rivet nut

Still on the ground, fit the **exit section** (yellow) under the end of the straight section.

Join the two sections the same way: on the **flange**, **4 5/16" × 2" screws** with a washer on both sides and a self-locking nut; in the **recess**, **2 M8×40 screws with washer** into the M8 rivet nuts.

CAUTION

Do not swap the screws. The **5/16" × 2"** goes on the **flange**, through both sections, with a washer on both sides and a nut. The **M8×40** goes in the **recess**, with a washer, screwed into the **M8 rivet nut**. Never force the 5/16" into the rivet nut: it ruins the rivet nut and the part.


PARTS FOR THIS STEP

- **1×** Slide: exit section ref. 1022109
- **4×** 5/16" × 2" hex screw ref. 1090113
- **2×** M8×40 hex screw ref. 2090320
- **10×** Washer two on each 5/16" screw; one on each M8×40
- **4×** 5/16" self-locking nut ref. 2090370

SCREWS AND TOOLS



Tool: 2 × 13 mm wrenches: one holds the nut while the other turns the screw.




Tool: 13 mm wrench.




How it looks at the end of step 13

STEP 14 OF 15


14 Slide onto the tower

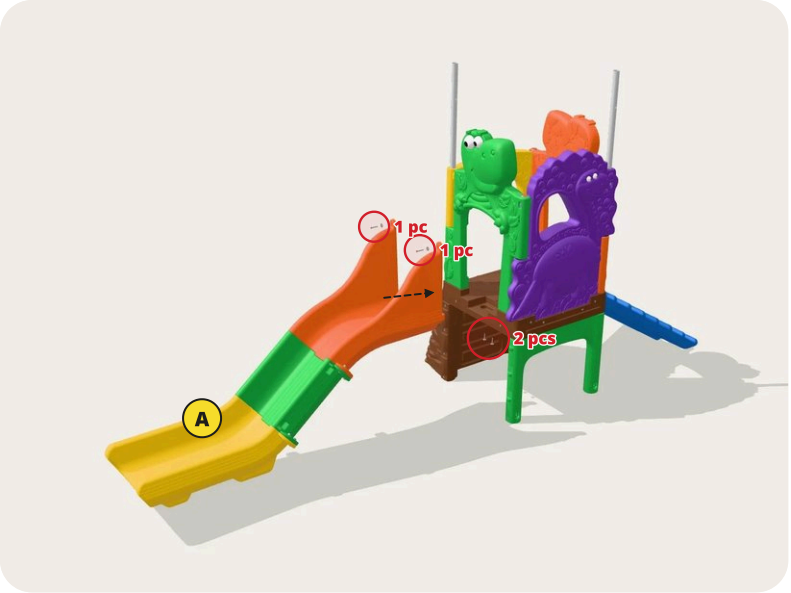

A Hook the assembled slide on the green Trix side

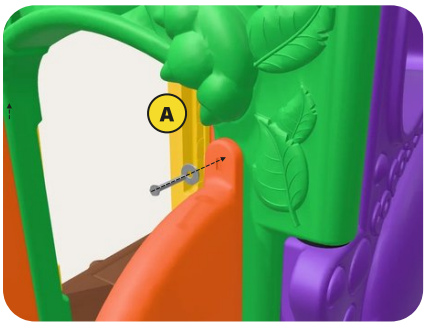

At the top: slide tab on the wall

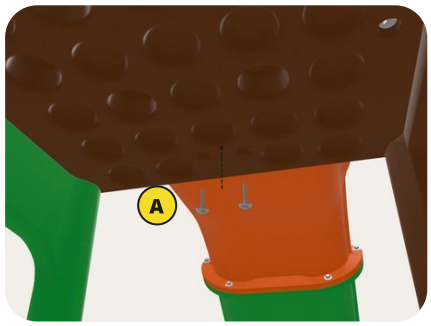

Below: under the platform

Bring the **assembled slide** to the tower and hook the entry section on the **green Trix** side.

Screw it with **4 M6×45 screws with washer**.

At the top: 1 screw in each slide tab, into the wall's rivet nut.


Below: 2 screws under the platform, from below.

PARTS FOR THIS STEP


4× M6×45 hex screw ref. 2090194

4× Washer one on each screw

SCREW AND TOOL



Tool: **10 mm wrench**.




How it looks at the end of step 14

STEP 15 OF 15

15 Tree tops



A The tree tops fit on top of the 2 long tubes

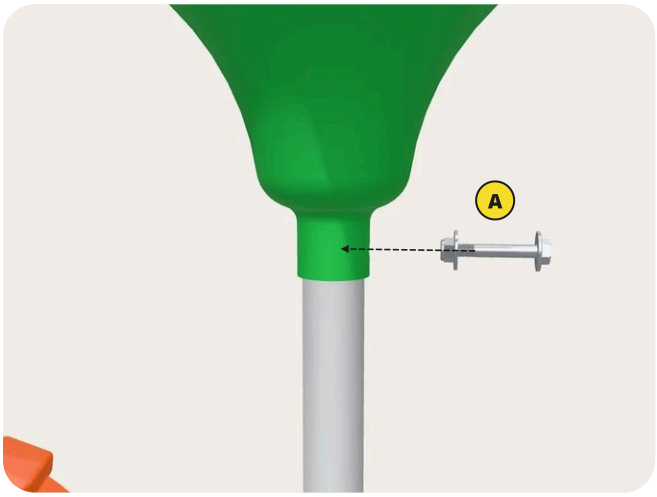

Fastening the tree top to the tube

A 5/16" × 2 1/4" screw + washer on both sides + self-locking nut

Fit the **2 tree tops** on top of the **2 long tubes**.

Fasten each tree top with **1 5/16" × 2 1/4" screw**, a **washer on both sides** and a **self-locking nut**, through the tree top and the tube.

PARTS FOR THIS STEP


2× Tree top ref. 1022104

4× Washer two on each screw, one on each side

2× 5/16" self-locking nut ref. 2090370

2× 5/16" × 2 1/4" hex screw ref. 2090392

SCREW AND TOOL




Tool: 2 × 13 mm wrenches: one holds the nut while the other turns the screw.



How it looks at the end of step 15


FASTENING DETAILS

How each part is screwed on

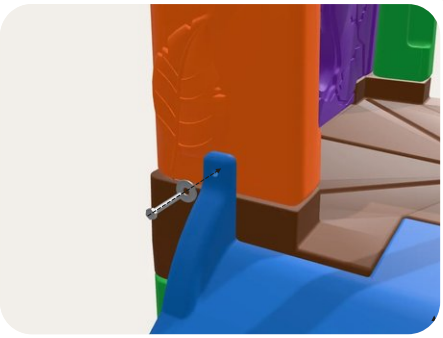


Climbing ramp

M6×45 screw + washer through the ramp tab, into the wall's rivet nut. 2 tabs, 1 screw in each.

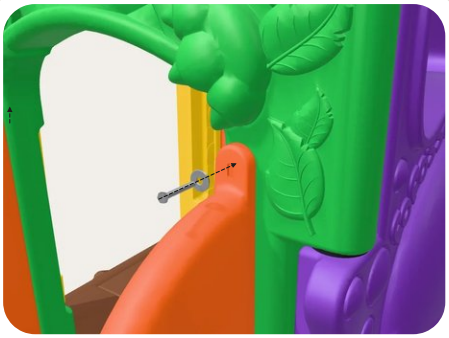

Slide

M6×45 screw + washer through the entry section tab, into the wall's rivet nut. 2 tabs, 1 screw in each.

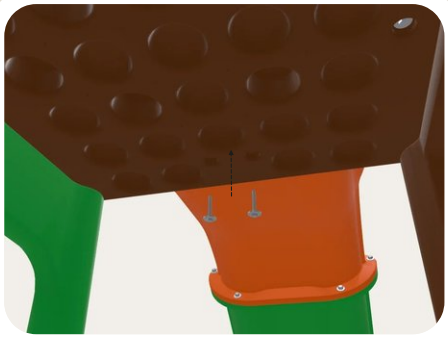


Fixing from below

Ramp, slide and platform cover: 2 M6×45 screws + washer under the platform, always from below.




Wall

M6×90 screw + washer, from the outside in, through both walls and the tube. 1 in each corner.

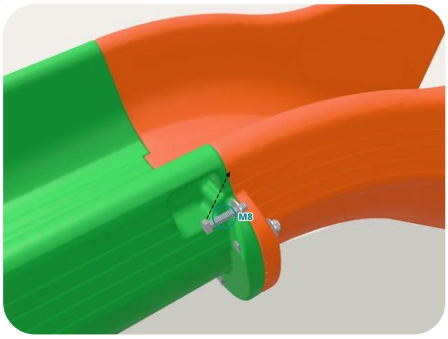


Slide sections

On the flange: 4 5/16" × 2" screws with a washer on both sides and a self-locking nut. In the recess: 2 M8×40 screws with washer, into the M8 rivet nut. At each joint.

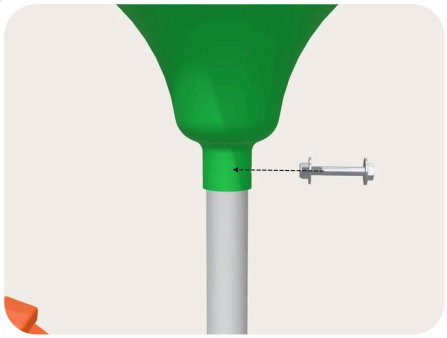

Tree top

5/16" × 2 1/4" screw with a washer on both sides and a self-locking nut, through the tree top and the tube.

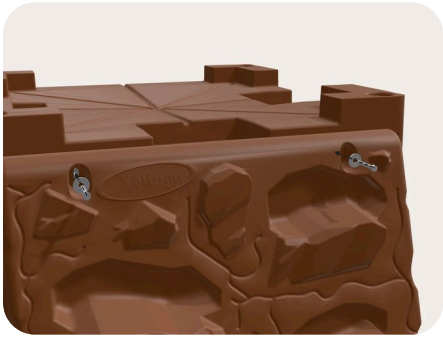

Climbing wall

M6×45 screw + washer from the outside of the climbing wall into the platform. 2 screws.




Assembly complete

Check the product visually, making sure every part is fitted and firmly fastened. **Only then let children use it.**

Age range: 3 to 8 years. Check that every screw is tight before letting children use it.

INSTALLATION DETAILS

Location and safety area

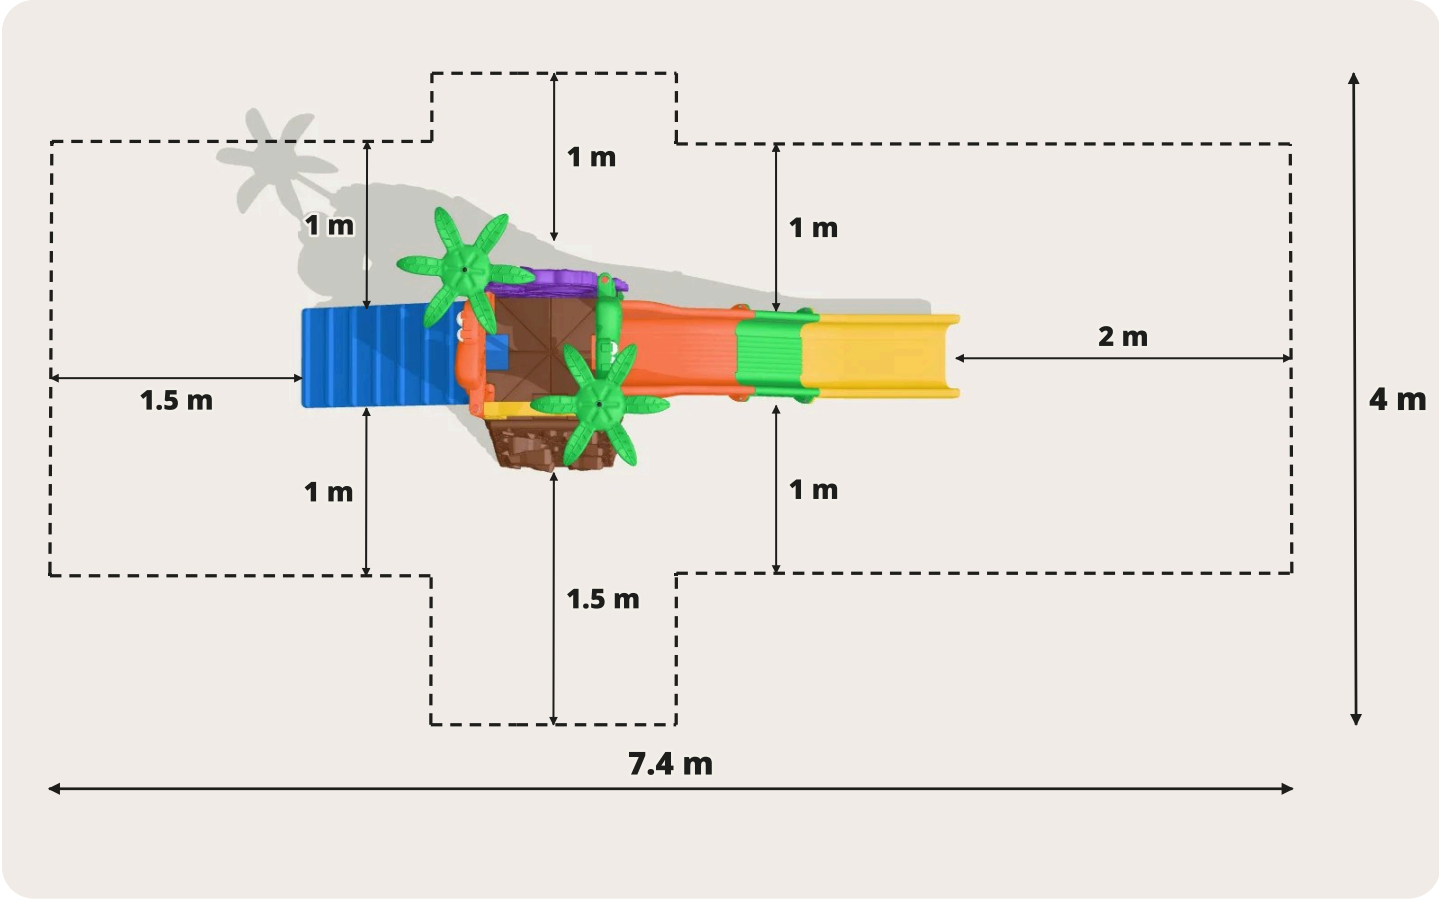

Area reserved for installation and slide impact (top view, dashed line) · Product size: 3,90 × 1,37 × 2,23 m

To keep users safe, minimum spaces and free distances must be respected.

Circulation area: at least 1.20 m wide around the equipment, so users can run freely; at least 1.50 m where the path changes direction, so strollers and wheelchairs can get in and turn.

Fall space: neighboring static equipment with overlapping fall spaces must be at least 1.50 m apart for a fall height of up to 600 mm, and 2.50 m for higher falls. Maximum fall height of this product: **700 mm**.

Slide landing area: at least 1000 mm from the sides of the run-out section and 2000 mm (type 01 run-out) or 1000 mm (type 02 run-out) from the end of the run-out section.

Ground: an even, continuous, stable surface that is non-slip in any weather, with no obstacles and a cross slope of no more than 2%. Use on grass, sand, carpet or another soft, level surface.

Location: first check for chemicals and loose material (rubble, sharp objects). Choose an airy place with morning sun, sheltered from drafts; do not install it in basements or garages. Never use it near stairs, roads, swimming pools, water or slippery places. If the area is fenced, the gates must open outwards and be at least 1 m wide.

Area reserved for installation and slide impact: about **7.4 × 4 m (24 × 13 ft)** (1 m around the playground, 1.5 m in front of the ramp and 2 m at the slide exit). Maximum fall height of the product: **700 mm (27.6 in)**.

To avoid accidents, the child should wear shoes. This product is not intended for commercial use.

INSPECTION AND MAINTENANCE

Keep the playground safe

Visual inspection — daily

- Cleanliness
- Free distances between the ground and the equipment
- Ground surface finish and exposed foundations
- Sharp edges and missing components
- Excessive wear and structural integrity

Operational inspection — every 1 to 3 months

Pay special attention to the structural integrity of the product, besides the items of the visual inspection.

Main inspection — yearly

- Structure: bending, deformation and cracks
- Finish: cracks, chips, broken or open joints
- Missing, bent, broken, loose or worn parts
- Edges, pinch points, access points and protective surfaces

Maintenance

- Tighten the joining parts and clean (do not use paints, solvents or other chemicals)
- Keep the free spaces and drain holes clean
- Replace fasteners and faulty or worn parts

As per NBR 16071-7:2012. Any change that affects safety only after consulting the manufacturer.

XALINGO S/A INDÚSTRIA E COMÉRCIO
BR 471, km 147 – Santa Cruz do Sul – RS – Brasil – CEP 96835-642
CNPJ 95.425.534/0001-76

SAC
(51) 3719-9800 · sac@xalingo.com.br
www.xalingo.com.br

Ilha dos Fofossauros · ref. 1008.7
Keep this manual for future reference.