Super Top Play

ref. 1003.2



ASSEMBLY INSTRUCTIONS

Assembly video on YouTube:
youtu.be/f9Bx1fbhCr0

Product size: **15.1 × 12.1 × 7.2 ft (4.60 × 3.69 × 2.19 m)**
Two towers joined by a bridge, with tunnel slide, 2 slides, 2 climbing ramps and tic-tac-toe
Age range: 3 to 8 years
Assembly by an adult — one person can do it alone.
17 steps · keep this manual for future reference.

BEFORE YOU START

Read carefully

Caution

Give this toy to the child only after it has been **assembled by an adult**, and always use it under **adult supervision**.

Assembly rules

- Follow the tube orientation: the **single hole goes at the bottom**, lined up with the hole in the leg, and the **top holes go up**.
- Every screw must go in with a **washer**, for a more even and secure tightening.
- Mind the position of each platform: the **side without the recess** goes on the window wall side on the tower with roof and on the tunnel side on the tunnel tower.
- Walls always with the **rivet nuts facing out**, and always an **EVA spacer** between two walls.
- The bridge, ramps and slides are screwed to the platform **from below**.

Tools




- **10 mm open-end or combination wrench**: M6×90 screws (8 pcs, steps 6 and 11) and M6×45 screws (50 pcs, steps 12–17)
- **10 mm socket with extension** or **10 mm L-shaped box wrench**: recessed screws of the tic-tac-toe crossbars (step 15)
- **2 × 13 mm wrenches** (or a wrench + a 13 mm socket): M8×70 screw with nut (4 sets, step 7). One holds the nut while the other turns the screw.
- Pliers


There are no specific tightening torques for the fasteners. The rivet nuts come already fitted in the parts.

Screws in this playground


Each type has its own color. The same card appears in each step and in the assembly video.

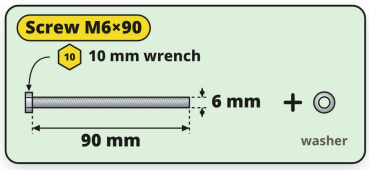

8× Screw M6×90 · steps 6 and 11

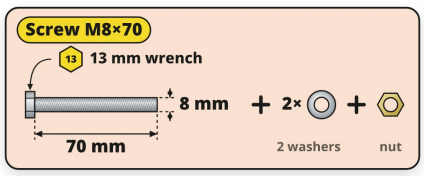

4× Screw M8×70 · step 7



50× Screw M6×45 · steps 12–17

PARTS LIST

Super Top Play parts



PLATFORM 2×
No. 1 · ref. 998711



RIVET NUT 8SJN-M6 108×
No. 2 · ref. 2090183 · already fitted



HEX SCREW M6 6×45 mm 50×
No. 3 · ref. 2090194



WASHER 58×
No. 4 · ref. 2090347



YELLOW STRIPED WALL 2×
No. 5 · ref. 998707



HEX SCREW M6 6×90 mm 8×
No. 6 · ref. 2090460



ORANGE WALL WITH DOTS 2×
No. 7 · ref. 998706



BRIDGE 1×
No. 8 · ref. 1000902



WALL WITH WINDOW 1×
No. 9 · ref. 1000903



SLIDE 2×
No. 10 · ref. 998703



CLIMBING RAMP 2×
No. 11 · ref. 998704



LEG 4×
No. 12 · ref. 998708



CROSSBAR 4×
No. 13 · ref. 998709

FRAME TUBE 2000 mm 4×
No. 14 · ref. 998712



ROOF 1×
No. 15 · ref. 998705



EVA SEAL 8×
No. 16 · ref. 998728



YELLOW WALL WITH DOTS (FOR TUNNEL) 1×
No. 17 · ref. 998730



TUNNEL SLIDE 1×
No. 18 · ref. 998702



TUNNEL SLIDE BASE 2×
No. 19 · ref. 998714



SMALL CROSSBAR 2×
No. 20 · ref. 953203



TIC-TAC-TOE CUBE 9×
No. 21 · ref. 998710

FRAME TUBE 1550 mm 4×
No. 22 · ref. 1003202



END CAP FOR TUBE 1550 mm 4×
No. 23 · ref. 1100137



HEX SCREW M8×70, YELLOW ZINC, FULLY THREADED 4×
No. 24 · ref. 2090329



M8 LOCK NUT 4×
No. 25 · ref. 2090323



ORANGE STRIPED WALL 2×
No. 26 · ref. 998726



M8 FLAT WASHER 8×
No. 27 · ref. 2090185

PRODUCT ASSEMBLY


Step by step

In each step, the arrows show where the part goes, the **black numbers** give the order and the **yellow letters** point to the details explained under the picture.

1

STEP 1 OF 17

Tower with roof: legs, platform and 3 tubes

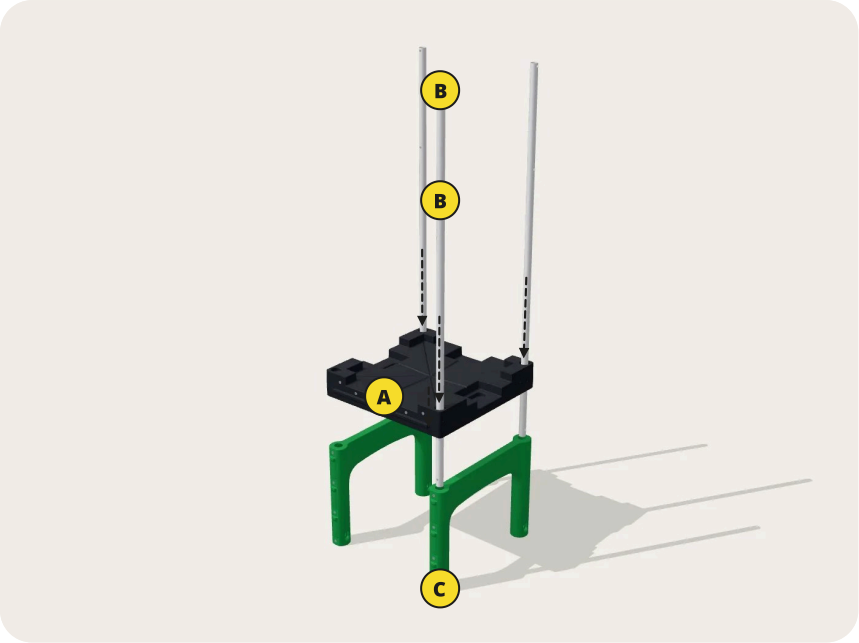

A Platform side without the recess: window wall side

B The tube's 2 holes at the top

C The tube's bottom hole lined up with the hole in the leg



The tube's bottom hole lined up with the leg

A Tube hole lined up with the hole in the leg

Start with the **tower with roof**. Place the 2 legs and set the platform on them.

Mind the platform position: the **platform side without the recess goes on the window wall side**, where the tic-tac-toe goes.

Push **3 tubes of 2000 mm** through the corners of the platform down to the bottom of the legs. The fourth corner stays without a tube for now.

CAUTION
Tube orientation: the **single hole goes down**, lined up with the hole in the leg, and the **2 holes go up**.

The 4 tubes of 2000 mm are for the tower with roof. The 4 shorter tubes (1550 mm) are for the tunnel tower.

PARTS FOR THIS STEP




2× Leg
ref. 998708



1× Platform
ref. 998711


3× Tube 2000 (tower with roof)
ref. 998712

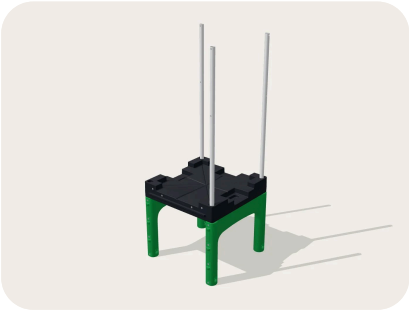

How it looks at the end of step 1

STEP 2 OF 17

2 Identify the walls

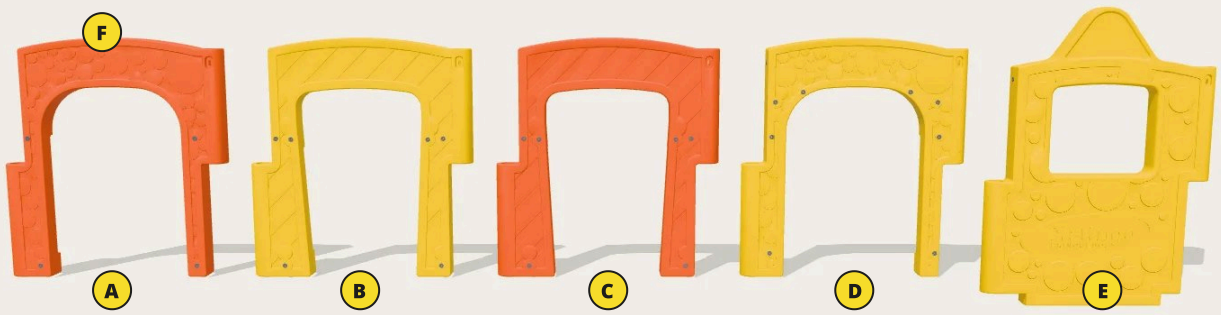

- **A** Orange with dots (2 pcs): one on each tower
- **B** Yellow striped (2 pcs): one on each tower
- **C** Orange striped (2 pcs): one on each tower
- **D** Yellow with dots (1 pc): tunnel tower, tunnel side
- **E** With window (1 pc): tower with roof
- **F** Rivet nuts always facing out

The Super Top Play has **8 walls**, 4 on each tower. Each tower takes one **orange wall with dots**, one **yellow striped** and one **orange striped**.

The fourth wall is different on each tower: **with window** on the tower with roof (tic-tac-toe side) and **yellow with dots** on the tunnel tower (tunnel side).


Tower with roof: **orange striped** on the slide side, **orange with dots** on the bridge side and **yellow striped** on the ramp side.

Tunnel tower: **orange with dots** on the ramp side, **yellow striped** on the slide side and **orange striped** on the bridge side.

CAUTION
When fitting the walls, always keep the **rivet nuts facing out**: they hold the bridge, the ramps, the slides and the tunnel.

STEP 3 OF 17

3 Walls of the tower with roof

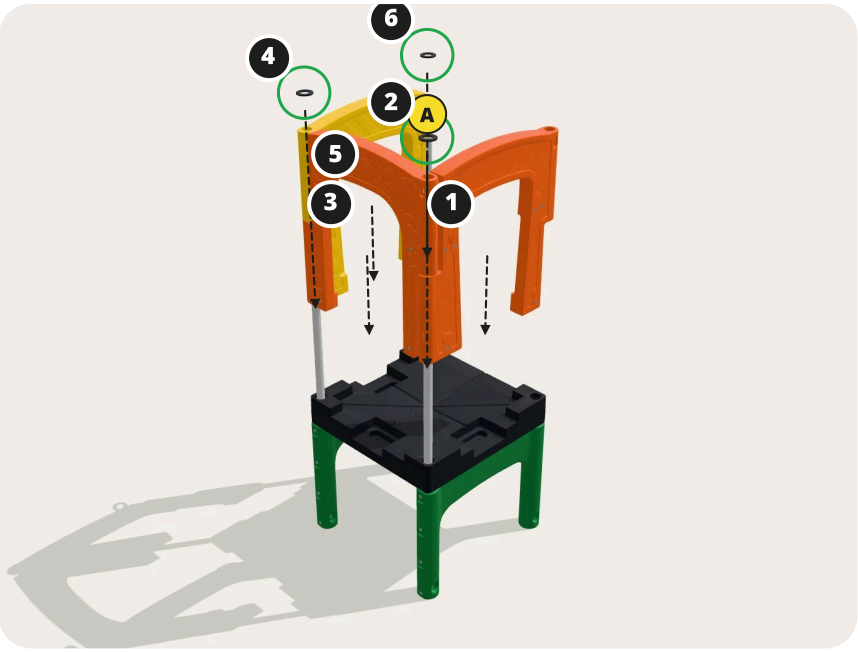

A EVA spacer on top, in the corner, before the next wall

Slide the walls down the tubes, in the order of the numbers in the picture:

1. Orange striped wall (slide side). **2.** EVA spacer on top, in the corner.


3. Orange wall with dots (bridge side). **4.** EVA spacer in the next corner.

5. Yellow striped wall (ramp side). **6.** EVA spacer in the other corner.

CAUTION
The EVA spacer goes **on top, before** the wall that closes that corner: there is always an EVA spacer between two walls.

PARTS FOR THIS STEP

1× Orange wall with dots ref. 998706	**1×** Yellow striped wall ref. 998707
1× Orange striped wall ref. 998726	**3×** EVA seal (spacer) ref. 998728

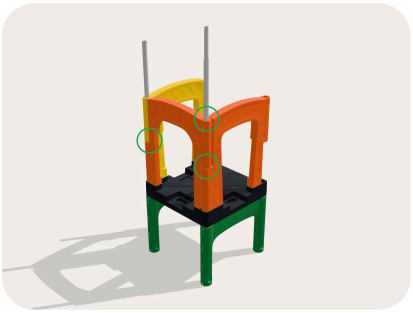

How it looks at the end of step 3

STEP 4 OF 17

4 Wall with window



1. Fit the end of the **wall with window** (tic-tac-toe side) on the **tube of the corner already in place** and slide the wall straight down, **swung open outward**.

2. With the wall resting on the platform, **swing it around the tube** until the square is closed.

> The other corner of this wall still has no tube: it goes in at step 5 and locks the walls.

PARTS FOR THIS STEP




1× Wall with window
ref. 1000903



How it looks at the end of step 4

STEP 5 OF 17

5 Last EVA and 4th tube

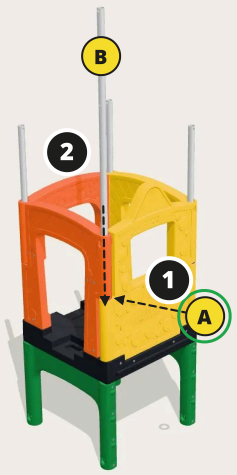

A Last EVA spacer: goes in from the front, flat

B Slide down the 4th tube: it locks the walls

1. Fit the last EVA spacer **from the front**, flat, in the corner that has no tube yet.

2. Slide down the **4th tube** (single hole down): it goes through the walls and the EVA and locks the assembly.

PARTS FOR THIS STEP

1× Tube 2000 (tower with roof)
ref. 998712


1× EVA seal (spacer)
ref. 998728




How it looks at the end of step 5

STEP 6 OF 17

6 Join the walls

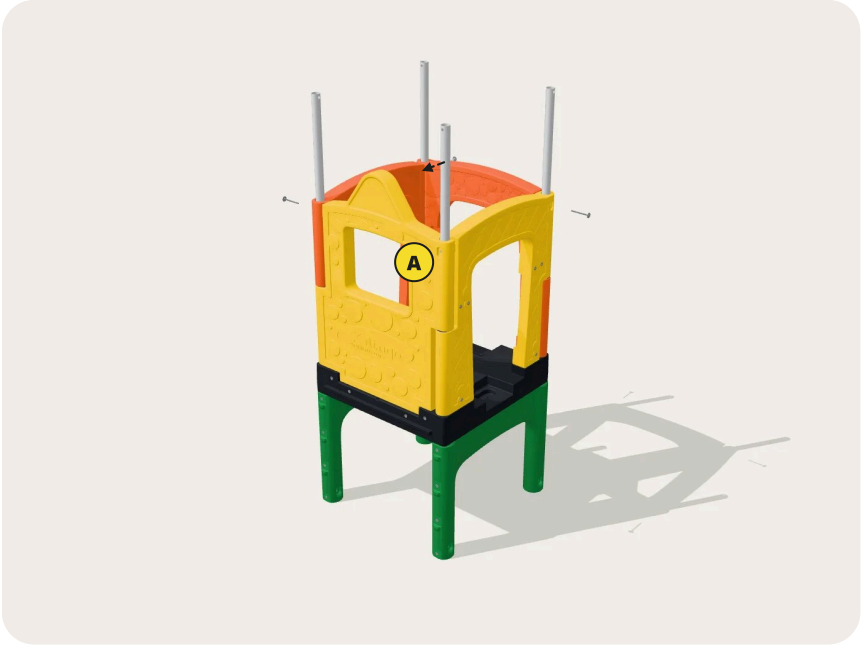

A 4 M6×90 screws go through the tubes (1 in each corner)

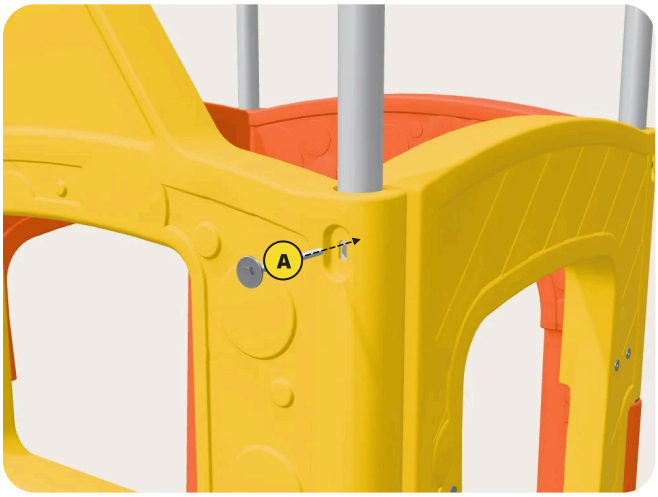

M6×90 screw going through the tube

A M6×90 screw + washer, from the outside in

Join the walls with the longer screws: **4 M6×90 screws with washer**, 1 in each corner, put in **from the outside in**.

The tubes have through holes for the screws.

PARTS FOR THIS STEP




4× Washer
one on each screw




4× M6×90 hex screw
ref. 2090460

SCREW AND TOOL



Tool: **10 mm wrench**.




How it looks at the end of step 6

STEP 7 OF 17

7 Roof



A The roof fits on the 4 tubes

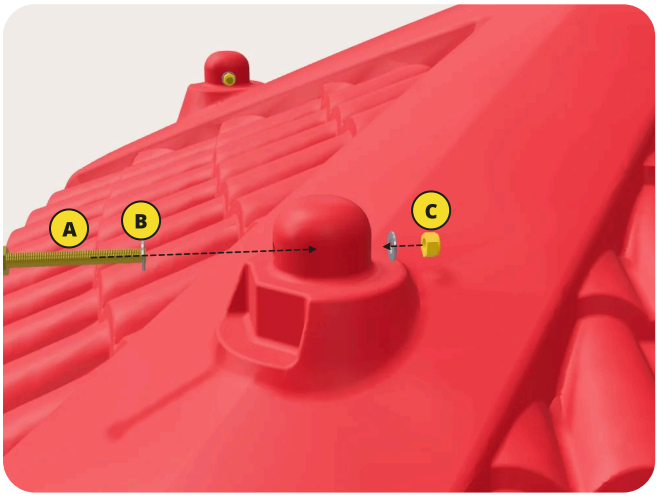

Roof fastening on each tube

A M8×70 screw

B M8 flat washer (on both sides)

C M8 self-locking nut (on the other side)

Place the roof on the 4 tubes.


In each corner, fasten with an **M8×70 screw**, an **M8 flat washer on each side** and an **M8 self-locking nut** (4 sets, 8 washers): the screw goes in with one washer on one side, and the other washer and the nut go on the other side.

> Use 2 13 mm wrenches: one holds the nut and the other turns the screw.

PARTS FOR THIS STEP

- **1×** Roof ref. 998705
- **8×** M8 flat washer two on each M8×70 screw
- **4×** M8 self-locking nut, yellow ref. 2090323
- **4×** M8×70 hex screw (fully threaded) ref. 2090329

SCREW AND TOOL




Tool: **2 × 13 mm wrenches**: one holds the nut while the other turns the screw.



How it looks at the end of step 7

STEP 8 OF 17


8 Tunnel tower: legs, platform and 3 tubes

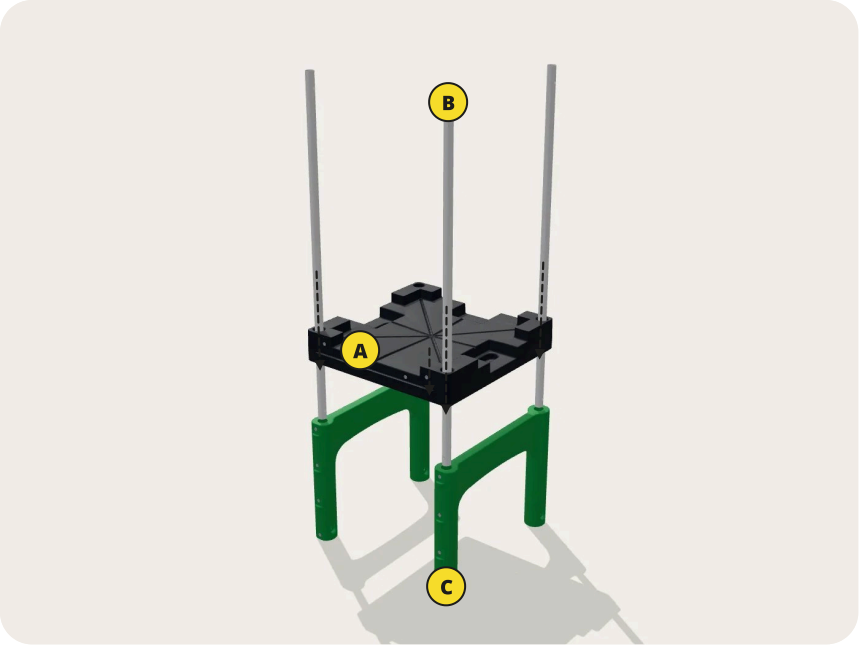

A Platform side without the recess: tunnel side

B The tube's holes at the top

C The tube's bottom hole lined up with the hole in the leg

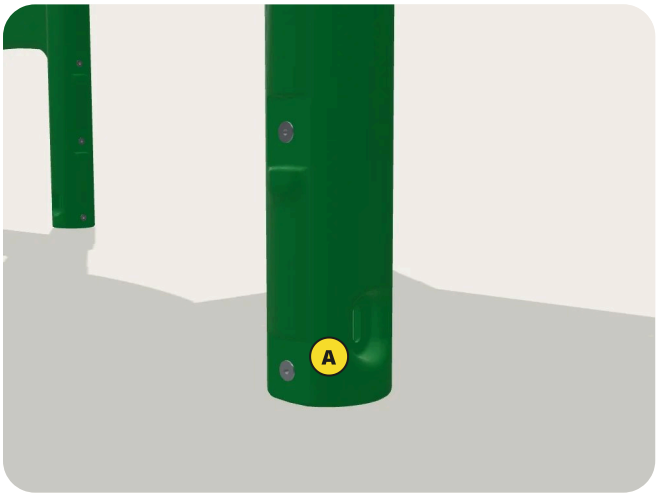

The tube's bottom hole lined up with the leg

A Tube hole lined up with the hole in the leg

Now build the **tunnel tower**, the tower without a roof. Place the 2 legs and set the platform on them.

Mind the platform position: the **platform side without the recess goes on the tunnel side**, where the yellow wall with dots goes.

Push **3 tubes of 1550 mm** through the corners of the platform down to the bottom of the legs, single hole down.

PARTS FOR THIS STEP




2× Leg
ref. 998708



1× Platform
ref. 998711


3× Tube 1550 (tunnel tower)
ref. 1003202

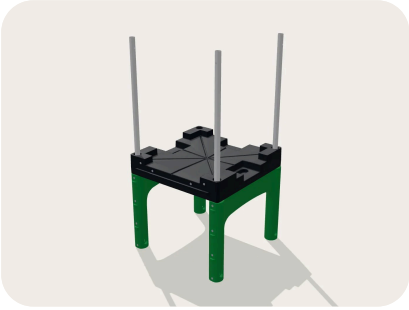

How it looks at the end of step 8

STEP 9 OF 17

9 Walls of the tunnel tower

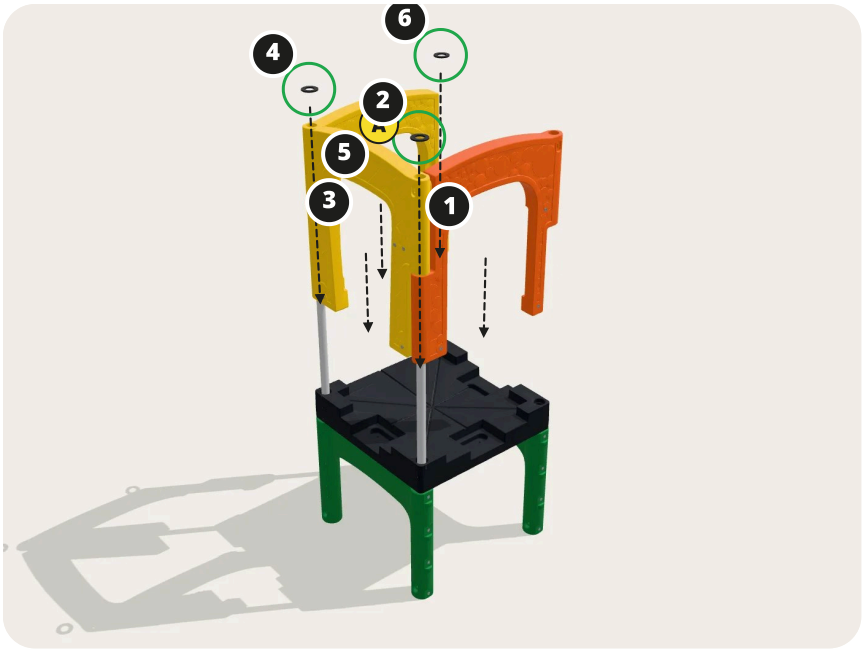

A Yellow with dots: tunnel side

Fit the walls and the EVA spacers in the same order as step 3:

1. Orange wall with dots (ramp side) and **2.** EVA. **3. Yellow striped** wall (slide side) and **4.** EVA.

5. Yellow wall with dots (tunnel side; it is the wall with more rivet nuts) and **6.** EVA.

CAUTION
Always keep the **rivet nuts facing out** and an EVA spacer between two walls.

PARTS FOR THIS STEP



1× Orange wall with dots
ref. 998706



1× Yellow striped wall
ref. 998707



3× EVA seal (spacer)
ref. 998728



1× Yellow wall with dots (tunnel)
ref. 998730




How it looks at the end of step 9

STEP 10 OF 17

10 Last wall, 4th tube and caps



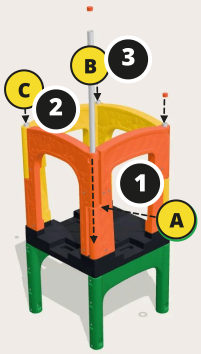

Last EVA (1), 4th tube (2) and caps (3)

- **A** Last EVA spacer: from the front, horizontally
- **B** Slide down the 4th tube: it locks the walls
- **C** Caps fitted on top of the 4 tubes

1. Fit the **orange striped** wall (bridge side) on the tube of the corner already in place and slide it straight down, swung open outward. **2.** Resting on the platform, **turn it around the tube** until the square is closed.

Then fit the **last EVA spacer from the front**, horizontally, slide down the **4th tube** (single hole down) and fit the **4 caps** on top of the tubes.

CAUTION
Mind the **end caps**: they go on top of the 4 tubes of the tunnel tower.

PARTS FOR THIS STEP

1× Orange striped wall ref. 998726	**1×** EVA seal (spacer) ref. 998728
1× Tube 1550 (tunnel tower) ref. 1003202	**4×** Tube end cap ref. 1100137




How it looks at the end of step 10

STEP 11 OF 17

11 Join the walls of the tunnel tower



A 4 M6×90 screws go through the tubes (1 in each corner)

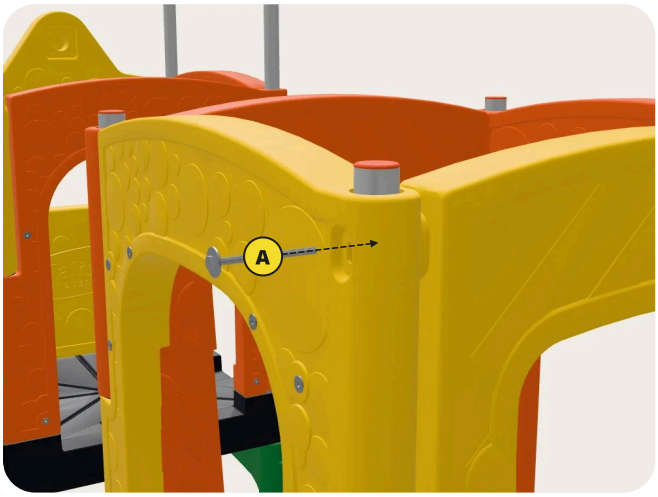

M6×90 screw going through the tube

A M6×90 screw + washer

Join the walls with **4 M6×90 screws with washer**, 1 in each corner, from the outside in.

Place the towers with the **orange wall with dots** of the tower with roof facing the **orange striped** wall of the tunnel tower: the bridge goes between them.

> Leave about 80 cm between the platforms of the two towers; the bridge sets the exact distance in the next step.

PARTS FOR THIS STEP




4× Washer
one on each screw



4× M6×90 hex screw
ref. 2090460

SCREW AND TOOL



Tool: **10 mm wrench.**




How it looks at the end of step 11

STEP 12 OF 17


12 Bridge



A On the other side of the bridge, 2 more tabs: 1 screw in each

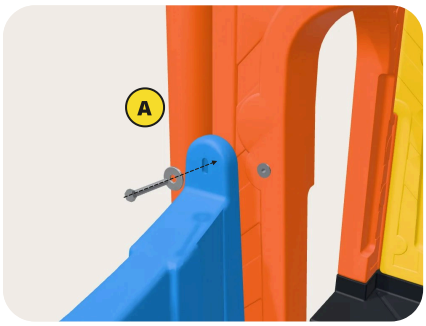

At the top: bridge tab on the wall

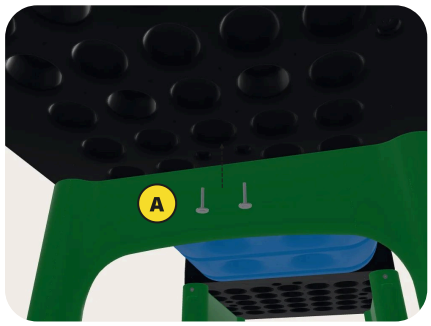

Below: under the platform

Fit the bridge between the two towers and screw it with **8 M6×45 screws with washer**.

At the top: the bridge has **4 tabs**, 2 at each end. Each tab takes **1 screw with washer**, which goes through the tab into the **wall's rivet nut**.


Below: 2 screws under each platform, from below.

CAUTION
Items fixed to the platform (bridge, slides and ramps) must be screwed **from below**, besides the fixings on the walls.

PARTS FOR THIS STEP

- **1×** Bridge ref. 1000902
- **8×** M6×45 hex screw ref. 2090194
- **8×** Washer one on each screw

SCREW AND TOOL



Tool: **10 mm wrench.**



How it looks at the end of step 12

STEP 13 OF 17

13 Slides




Fit the 2 slides: one on the tunnel tower (yellow striped wall) and the other on the tower with roof (orange striped wall). Screw them with **8 M6×45 screws with washer**.

Each slide has **2 fixing points on the wall** (1 screw in each tab, into the wall's rivet nut) and **2 on the platform**, from below.


PARTS FOR THIS STEP

- **2×** Slide ref. 998703
- **8×** M6×45 hex screw ref. 2090194
- **8×** Washer one on each screw


SCREW AND TOOL




Tool: **10 mm wrench.**



How it looks at the end of step 13

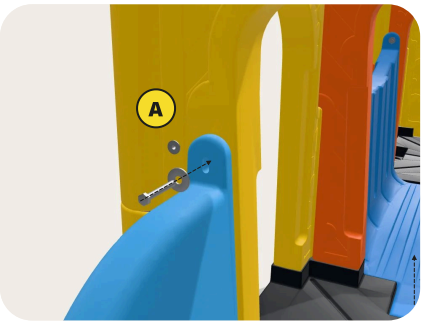


At the top: slide tab on the wall

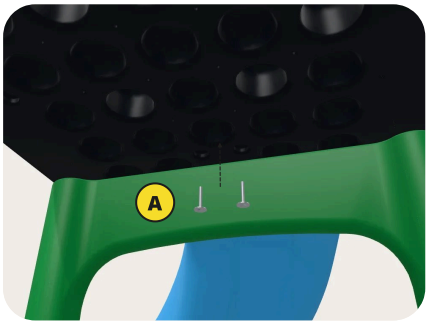


Below: under the platform


STEP 14 OF 17

14 Ramps (climbers)

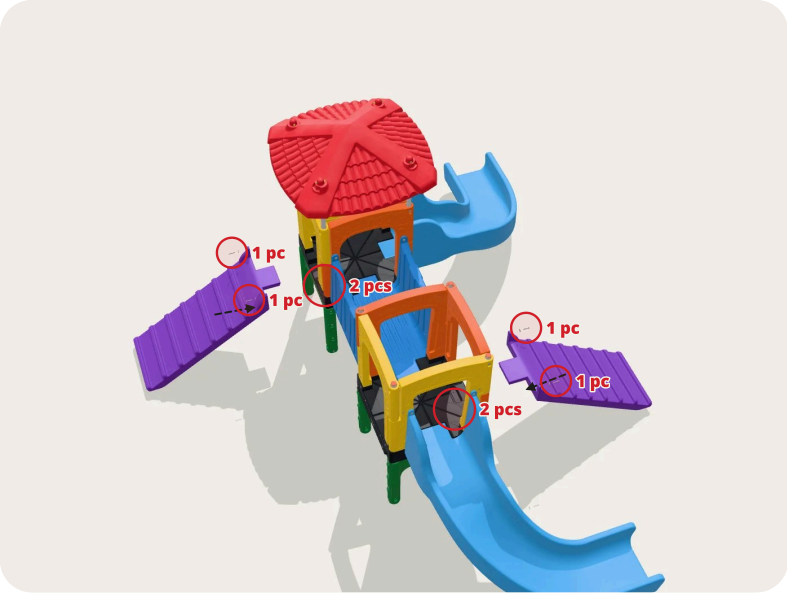

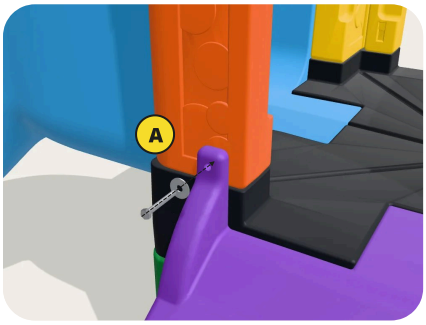

At the top: ramp tab on the wall

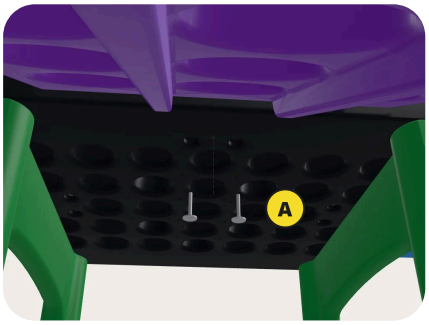

Below: under the platform

Fit the 2 ramps: one on the tunnel tower (orange wall with dots) and the other on the tower with roof (yellow striped wall). Screw them with **8 M6×45 screws with washer**.

Each ramp has **2 fixing points on the wall** and **2 on the platform**, from below.

PARTS FOR THIS STEP



2× Climbing ramp
ref. 998704




8× M6×45 hex screw
ref. 2090194




8× Washer
one on each screw

SCREW AND TOOL




Tool: **10 mm wrench.**



How it looks at the end of step 14

STEP 15 OF 17

15 Tic-tac-toe

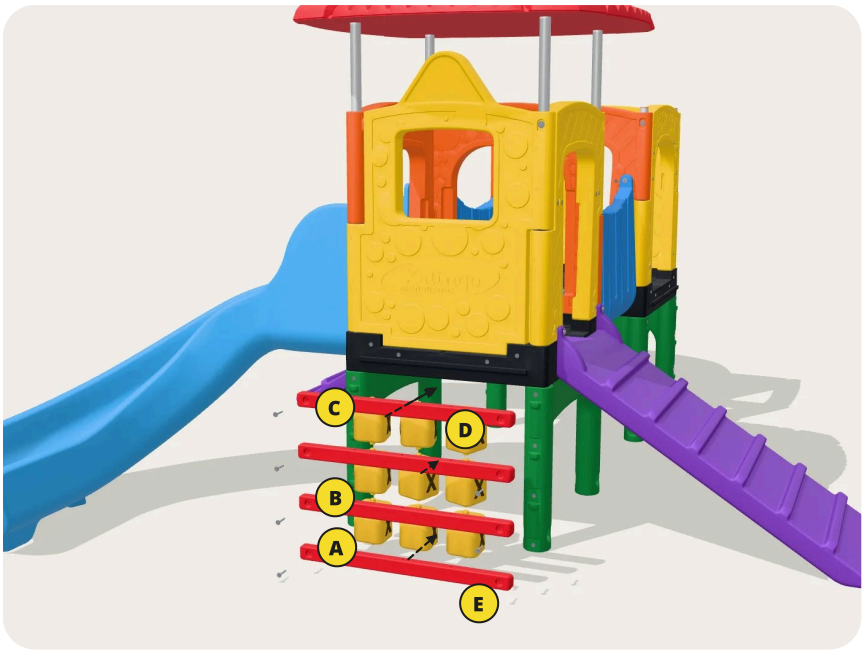

- **A** Bottom crossbar: holes facing up
- **B** Middle crossbars: through holes
- **C** Top crossbar: holes facing down
- **D** Cubes fit on the crossbar pegs
- **E** 8 M6×45 screws + washer, 2 in each crossbar



Crossbar screw into the leg

- **A** M6×45 screw + washer into the leg: it sits recessed in the crossbar (10 mm socket with extension)

The tic-tac-toe goes **under the tower with roof**, between the legs, on the window wall side.

Build it from the bottom up: crossbar, 3 cubes, crossbar, 3 cubes, crossbar, 3 cubes and the top crossbar. The cube pegs fit in the crossbar holes.

Mind the crossbar holes: on the **bottom crossbar** the holes face **up**; on the **top** one, **down**. The **middle crossbars** have through holes.


Screw each crossbar end to the leg with an **M6×45 screw and washer** (8 in total).

CAUTION
The screw sits recessed inside the crossbar: use a **10 mm socket with extension** or a **10 mm L-shaped socket wrench**.

PARTS FOR THIS STEP

4× Tic-tac-toe crossbar ref. 998709	**9×** Tic-tac-toe cube ref. 998710
8× M6×45 hex screw ref. 2090194	**8×** Washer one on each screw

SCREW AND TOOL



Tool: **10 mm socket with extension** or **10 mm L-shaped box wrench** (the screw sits recessed).



How it looks at the end of step 15

STEP 16 OF 17


16 Tunnel slide bases



A Base at the front of the tunnel: 2 M6×45 screws + washer

B Small crossbars join the two bases: 4 screws

SCREW AND TOOL

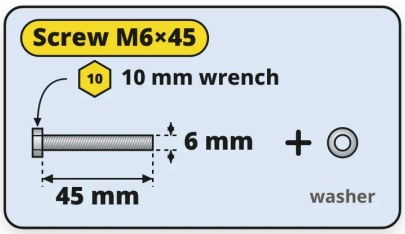

Tool: **10 mm wrench**.

With the tunnel on the ground next to the playground, fit one of the bases at the **front** of the tunnel slide and screw it (**2 M6×45 screws with washer**).

Place the second base and screw on the **2 small crossbars** to join the two bases (**4 M6×45 screws with washer**).

PARTS FOR THIS STEP

- **2×** Small crossbar ref. 953203
- **1×** Tunnel slide ref. 998702
- **2×** Tunnel slide base ref. 998714
- **6×** M6×45 hex screw ref. 2090194
- **6×** Washer one on each screw




How it looks at the end of step 16

STEP 17 OF 17

17 Tunnel slide



A 12 M6×45 screws + washer around the tunnel mouth

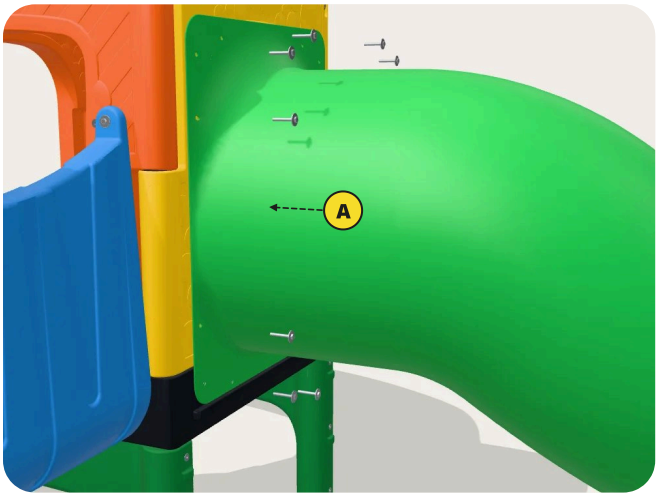

Tunnel mouth screws

A M6×45 screw + washer, 3 at each end of the tunnel mouth


Fit the tunnel slide on the **yellow wall with dots** of the tunnel tower and screw it with **12 M6×45 screws with washer**: 3 at each of the 4 ends of the tunnel mouth, from the outside in, into the wall's rivet nuts.

PARTS FOR THIS STEP


12× M6×45 hex screw ref. 2090194

12× Washer one on each screw

SCREW AND TOOL




Tool: **10 mm wrench**.



How it looks at the end of step 17


FASTENING DETAILS

How each part is screwed on

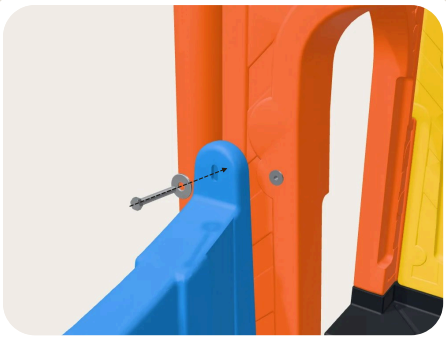

Bridge

M6×45 screw + washer through the bridge tab, into the wall's rivet nut. 4 tabs, 1 screw in each.

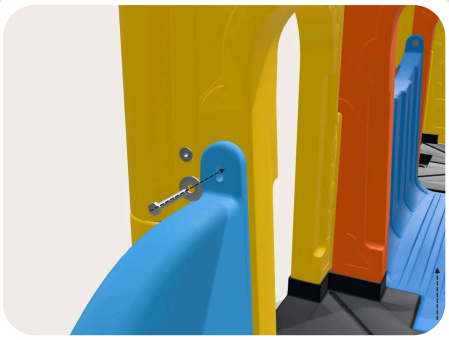


Slide

M6×45 screw + washer through the slide tab, into the wall's rivet nut. 2 per slide.




Climber (ramp)

M6×45 screw + washer through the ramp tab, into the wall's rivet nut. 2 per ramp.

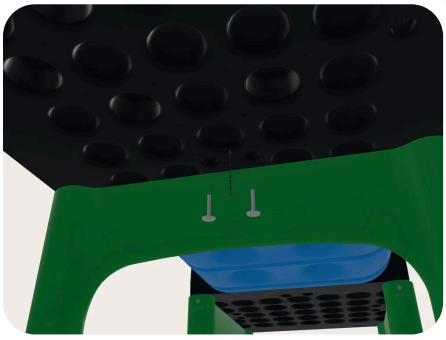


Fixing from below

Bridge, slides and ramps: 2 M6×45 screws + washer under the platform, always from below.

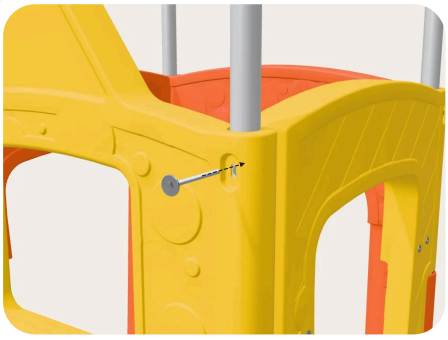


Wall

M6×90 screw + washer, from the outside in, through both walls and the tube. 1 in each corner.

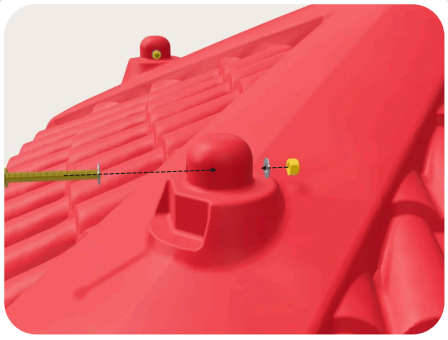

Roof

M8×70 screw with an M8 flat washer on each side and an M8 self-locking nut. 1 set on each tube.

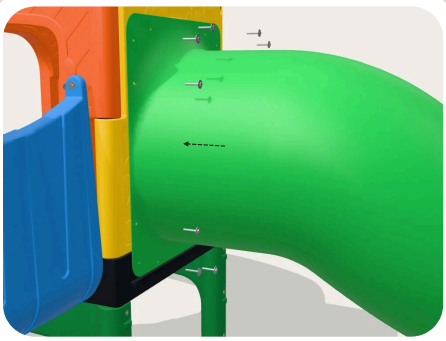

Tunnel slide

M6×45 screw + washer, 3 at each end of the tunnel mouth, into the rivet nuts of the yellow wall with dots.



Tic-tac-toe

M6×45 screw + washer at each crossbar end, into the leg. The screw sits recessed: 10 mm socket with extension.



Assembly complete

Check the product visually, making sure every part is fitted and firmly fastened. **Only then let children use it.**

Age range: 3 to 8 years. Designed for children up to 23 kg (50 lb).

INSTALLATION DETAILS

Location and safety area

To keep users safe, minimum spaces and free distances must be respected.

Circulation area: at least 1.20 m wide around the equipment, so users can run freely; at least 1.50 m where the path changes direction, so strollers and wheelchairs can get in and turn.

Fall space: neighboring static equipment with overlapping fall spaces must be at least 1.50 m apart for a fall height of up to 600 mm, and 2.50 m for higher falls. Maximum fall height of this product: **700 mm**.

Slide landing area: at least 1000 mm from the sides of the run-out section and 2000 mm (type 01 run-out) or 1000 mm (type 02 run-out) from the end of the run-out section.

Ground: an even, continuous, stable surface that is non-slip in any weather, with no obstacles and a cross slope of no more than 2%. Use on grass, sand, carpet or another soft, level surface.

Location: first check for chemicals and loose material (rubble, sharp objects). Choose an airy place with morning sun, sheltered from drafts; do not install it in basements or garages. Never use it near stairs, roads, swimming pools, water or slippery places. If the area is fenced, the gates must open outwards and be at least 1 m wide.

Area reserved for installation and slide impact: about **6.8 × 7.6 m** (1 m around the playground and 2 m at the exit of each slide). Maximum fall height of the product: **700 mm**.

Ground anchoring kit: comes with the product (2 triangular metal brackets, 6 anchor bolts 3/8" × 2 1/2", 2 M8×70 screws, 2 M8 self-locking nuts and 4 washers), to fix the playground to a firm floor.

To avoid accidents, the child should wear shoes. This product is not intended for commercial use.

INSPECTION AND MAINTENANCE

Keep the playground safe

Visual inspection — daily

- Cleanliness
- Free distances between the ground and the equipment
- Ground surface finish and exposed foundations
- Sharp edges and missing components
- Excessive wear and structural integrity

Operational inspection — every 1 to 3 months

Pay special attention to the structural integrity of the product, besides the items of the visual inspection.

Main inspection — yearly

- Structure: bending, deformation and cracks
- Finish: cracks, chips, broken or open joints
- Missing, bent, broken, loose or worn parts
- Edges, pinch points, access points and protective surfaces

Maintenance

- Tighten the joining parts and clean (do not use paints, solvents or other chemicals)
- Keep the free spaces and drain holes clean
- Replace fasteners and faulty or worn parts

As per NBR 16071-7:2012. Any change that affects safety only after consulting the manufacturer.

XALINGO S/A INDÚSTRIA E COMÉRCIO
BR 471, km 147 – Santa Cruz do Sul – RS – Brasil – CEP 96835-642
CNPJ 95.425.534/0001-76

SAC
(51) 3719-9800 · sac@xalingo.com.br
www.xalingo.com.br

Super Top Play · ref. 1003.2
Keep this manual for future reference.