Creative Play

ref. 0998.7

ASSEMBLY INSTRUCTIONS

Assembly video on YouTube:
youtu.be/9HynAiFR-ak



Product size: **3,60 × 3,40 × 2,14 m**
Assembly by an adult — one person can do it alone.
15 steps · keep this manual for future reference.

BEFORE YOU START

Read carefully

Caution

Give this toy to the child only after it has been **assembled by an adult**, and always use it under **adult supervision**.

Assembly rules

- Mind the tube orientation: the **single hole goes at the bottom**, lined up with the hole in the leg, and the **2 holes go at the top**.
- Every screw must go in with a **washer**, for a more even and secure tightening.
- Mind the floor's position so that the tunnel is assembled correctly.
- Walls always with the **rivets facing out**.
- The ramp and slides are screwed to the floor **from the bottom up**.

Tools




- **10 mm open-end or combination wrench**: M6×45 screws (38 pcs, steps 1 and 9–13) and M6×90 screws (4 pcs, step 14)
- **10 mm socket with extension** or **10 mm L-shaped box wrench**: recessed screws of the tic-tac-toe crossbars (step 1)
- **2 × 13 mm wrenches** (or a wrench + a 13 mm socket): M8×70 screw with nut (4 sets, step 15). One holds the nut while the other turns the screw.
- Pliers


There are no specific tightening torques for the fasteners. The rivet nuts come already fitted in the parts.

Screws in this playground


Each type has its own color. The same card appears in each step and in the assembly video.



38× Screw M6×45 · steps 1 and 9–13

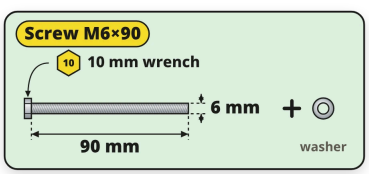

4× Screw M6×90 · step 14

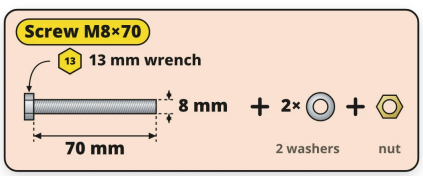

4× Screw M8×70 · step 15

PARTS LIST

Creative Play parts



BLACK PLATFORM — 1×
No. 1 · ref. 998711



RIVET NUT 8SJN-M6 — 62×
No. 2 · ref. 2090183 · already fitted



HEX SCREW M6 6×45 mm — 38×
No. 3 · ref. 2090194



M8 FLAT WASHER — 24×
No. 4 · ref. 2090185



TUNNEL SLIDE — 1×
No. 5 · ref. 998702



TUNNEL SLIDE BASE — 2×
No. 6 · ref. 998714



WASHER — 26×
No. 7 · ref. 2090347



SMALL CROSSBAR — 2×
No. 8 · ref. 953203



CLIMBING RAMP — 1×
No. 9 · ref. 998704



ROOF — 1×
No. 10 · ref. 998705



M8 SELF-LOCKING NUT, YELLOW — 4×
No. 11 · ref. 2090323



HEX SCREW M8×70, YELLOW ZINC, FULLY THREADED — 4×
No. 12 · ref. 2090329



HEX SCREW M6 6×90 mm — 4×
No. 13 · ref. 2090460



ORANGE WALL WITH DOTS — 1×
No. 14 · ref. 998706



EVA SEAL — 4×
No. 15 · ref. 998728



YELLOW STRIPED WALL — 1×
No. 16 · ref. 998707



TIC-TAC-TOE CUBE — 9×
No. 17 · ref. 998710

TUBE 2000 — 4×
No. 18 · ref. 998712



YELLOW WALL WITH DOTS – FOR THE TUNNEL — 1×
No. 19 · ref. 998730



ORANGE STRIPED WALL — 1×
No. 20 · ref. 998726



SLIDE — 2×
No. 21 · ref. 998703



CROSSBAR — 4×
No. 22 · ref. 998709




LEG — 2×
No. 23 · ref. 998708

PRODUCT ASSEMBLY


Step by step

In each step, the arrows show where the part goes, the **black numbers** give the order and the **yellow letters** point to the details explained under the picture.

1 STEP 1 OF 15
Legs and tic-tac-toe

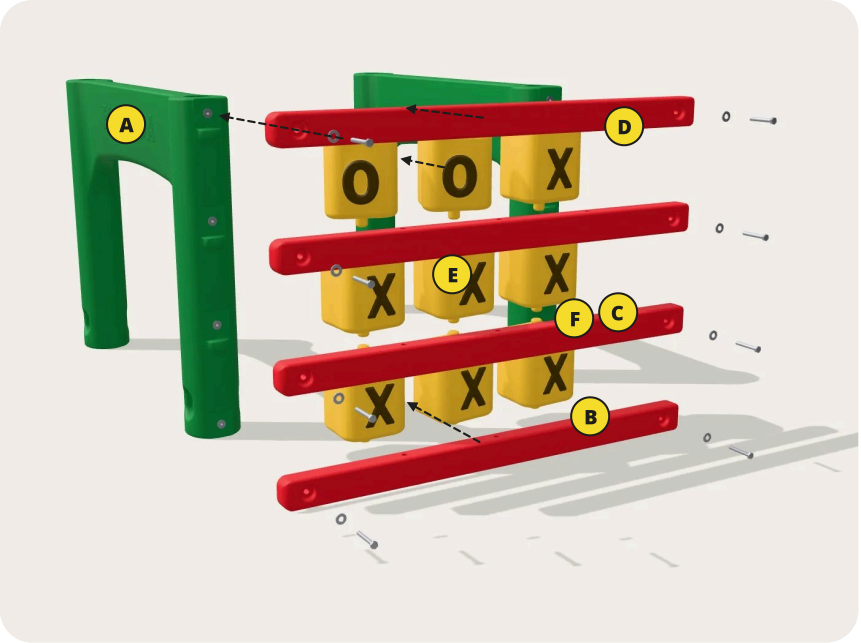

- **A** Legs with the word ENTRADA (entrance) facing out
- **B** Bottom crossbar: holes facing up
- **C** Middle crossbars: through holes
- **D** Top crossbar: holes facing down
- **E** The cubes fit on the crossbar pins
- **F** 8 M6×45 screws + washer

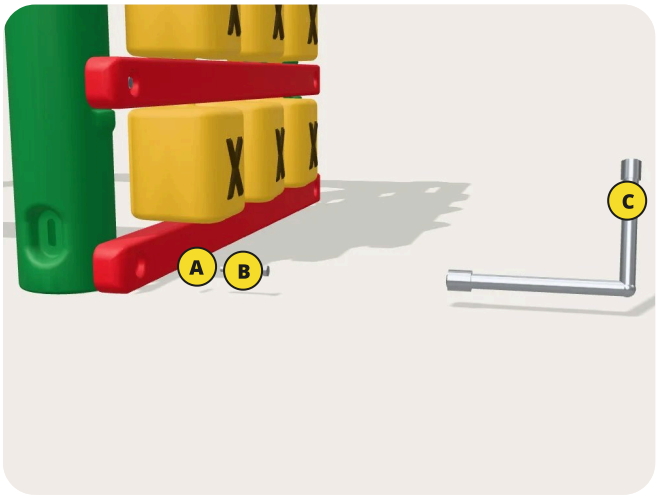

Detail: fixing the crossbars

- **A** Washer
- **B** M6×45 hex screw
- **C** 10 mm wrench: socket with extension or L-shaped box wrench

Place the two legs with the word **ENTRADA (entrance) facing out**.

Build the tic-tac-toe from the bottom up: crossbar, 3 cubes, crossbar, 3 cubes, crossbar, 3 cubes and the top crossbar. The cube pins fit into the crossbar holes.

Check the crossbar holes: on the **bottom crossbar**, near the ground, the holes face **up**; on the **top** one, **down**. The **middle crossbars** have through holes.


Screw each crossbar end to the leg with an **M6×45 screw and washer** (8 in total).

CAUTION
The screw sits recessed inside the crossbar: use a **10 mm socket with extension** or a **10 mm L-shaped box wrench**.


PARTS FOR THIS STEP

- **2×** Leg ref. 998708
- **4×** Crossbar ref. 998709
- **9×** Tic-tac-toe cube ref. 998710
- **8×** M6×45 hex screw ref. 2090194
- **8×** Washer one on each screw

SCREW AND TOOL




Tool: **10 mm socket with extension** or **10 mm L-shaped box wrench** (the screw sits recessed).



How it looks at the end of step 1

STEP 2 OF 15


2 Floor and 3 tubes

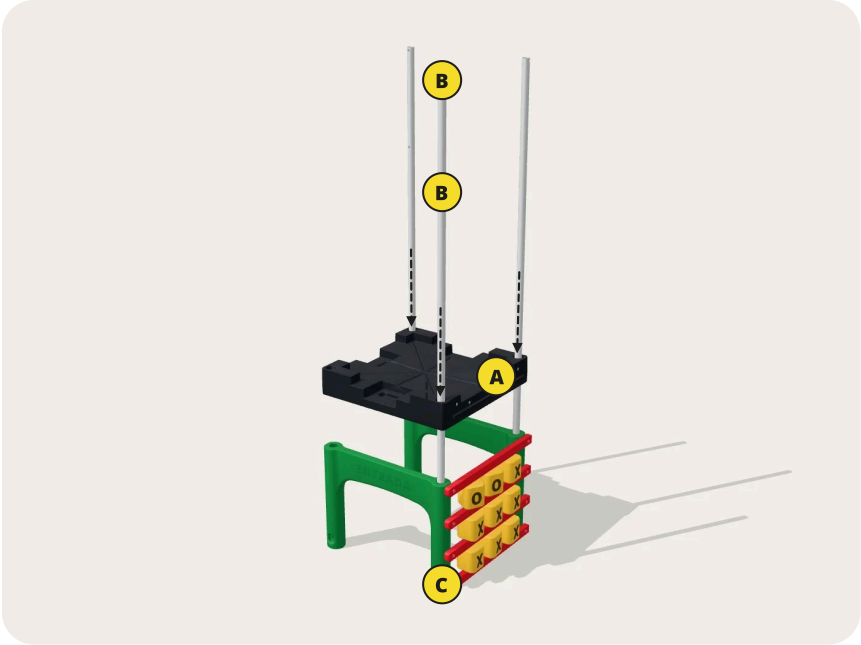

A Side without recess over the tic-tac-toe

B The tube's 2 holes at the top

C The tube's bottom hole lined up with the hole in the leg

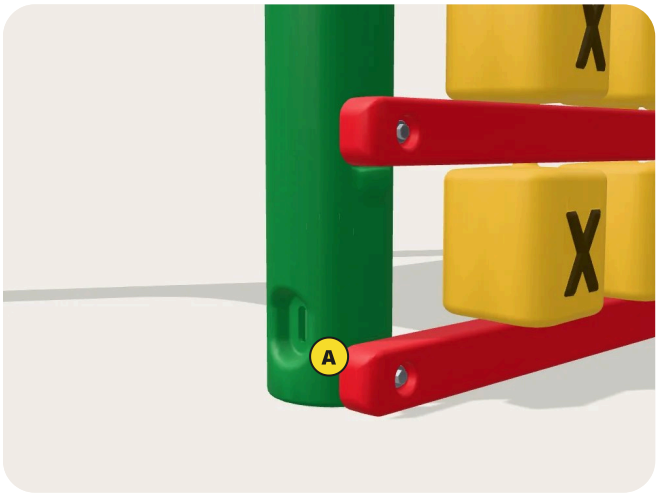

The tube's bottom hole lined up with the leg

A Tube hole lined up with the leg hole

Place the floor on the legs, minding its orientation to the tic-tac-toe: the **side of the floor without a recess goes over the tic-tac-toe**.

Push **3 tubes** through the corners of the platform down to the bottom of the legs. The fourth corner stays without a tube for now.


CAUTION
Tube orientation: the **single hole goes down**, lined up with the hole in the leg, and the **2 holes go up**.

PARTS FOR THIS STEP




1× Black floor
ref. 998711

3× Tube 2000
ref. 998712

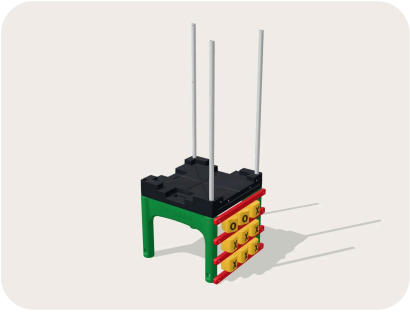

How it looks at the end of step 2

3 STEP 3 OF 15
Identify the walls

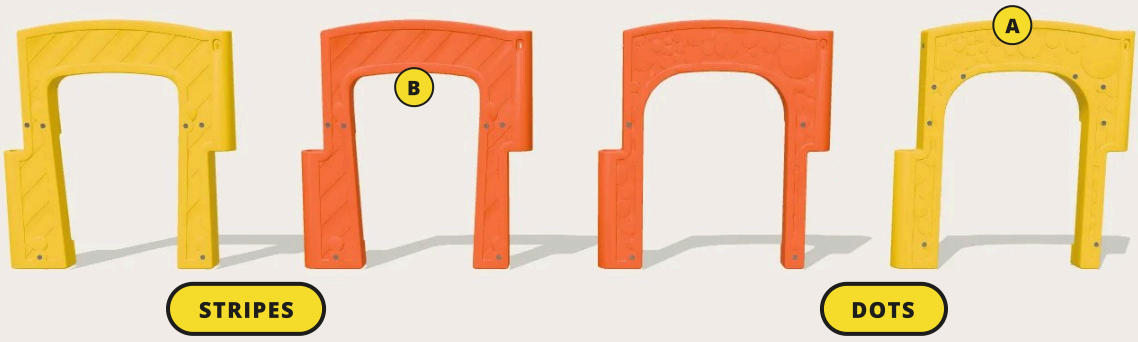

A More rivet nuts: goes on the tunnel side

B Rivet nuts always facing out

There are **two striped walls** and **two walls with dots** (colors may vary with production).

Of the walls with dots, the one with **more rivet nuts** goes on the **tunnel side**.

CAUTION
When fitting the walls, always keep the **rivets facing out**: they are used to fix the ramp and the slides.

4 STEP 4 OF 15
Wall with dots and EVA



A EVA spacer on top

B Wall with dots


Fit the wall with orange dots (ramp side) by sliding it down the tubes.

Put an **EVA spacer on top**, in the corner where the striped wall will meet it.

PARTS FOR THIS STEP

1× Orange wall with dots
ref. 998706

1× EVA seal (spacer)
ref. 998728



How it looks at the end of step 4

STEP 5 OF 15

5 Striped wall



A Striped wall slides down the tubes

Fit a striped wall by sliding it down the tubes, over the EVA spacer.

PARTS FOR THIS STEP




1× Yellow striped wall
ref. 998707



How it looks at the end of step 5

STEP 6 OF 15

6 Tunnel-side wall

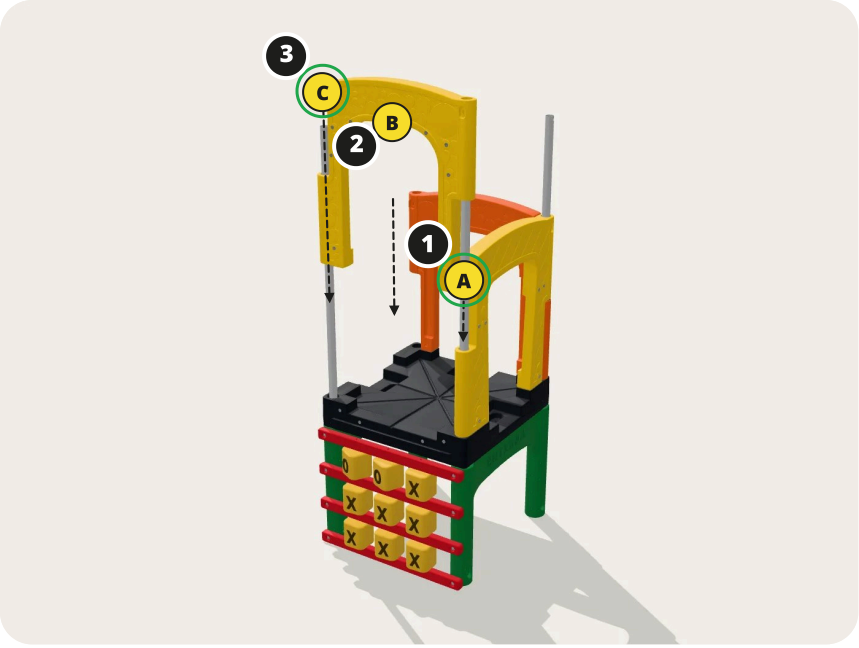

A EVA on top, before the tunnel wall

B Tunnel wall: dots, more rivet nuts

C EVA on top, in the other corner

1. Put an EVA spacer on top of the corner of the striped wall.

2. Fit the dotted wall with **more rivets** (tunnel side).

3. Put another EVA spacer on top, in the next corner.

CAUTION
In steps 4 and 6, the EVA spacer goes **on top, before** the wall that closes that corner. The last one (step 8) goes in **from the front**, after the last wall.


PARTS FOR THIS STEP



2× EVA seal (spacer)
ref. 998728




1× Yellow wall with dots (tunnel)
ref. 998730

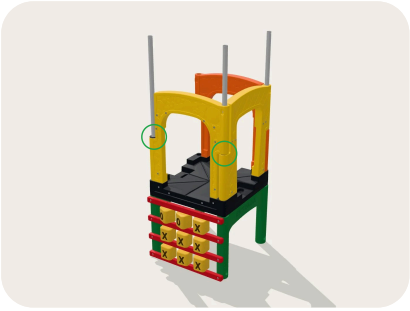

How it looks at the end of step 6

7 STEP 7 OF 15
Last striped wall

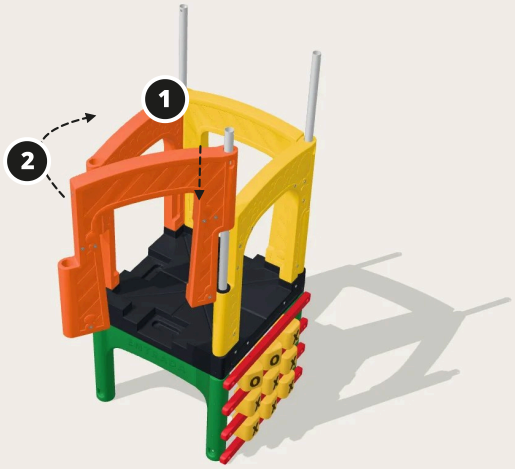

1. Fit the end of the last striped wall on the **corner tube already in place** and slide the wall down upright, **swung open outwards**.

2. With the wall resting on the platform, **swing it around the tube** until the square is closed.

> The other corner of this wall still has no tube: it goes in at step 8 and locks the walls.


PARTS FOR THIS STEP

1× Orange striped wall
ref. 998726



How it looks at the end of step 7

8 STEP 8 OF 15
Last EVA and 4th tube

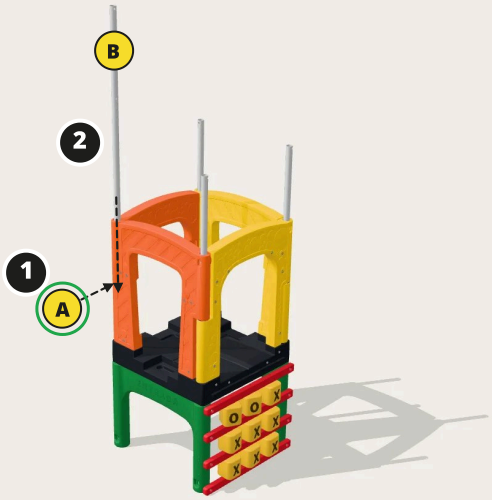

A Last EVA spacer: goes in from the front, flat

B Then lower the last tube: it locks the walls

1. Fit the last EVA spacer **from the front**, flat, in the corner that has no tube yet.

2. Then lower the **4th tube** (single hole down): it goes through the walls and the EVA and locks the whole set.

PARTS FOR THIS STEP

1× Tube 2000
ref. 998712


1× EVA seal (spacer)
ref. 998728



How it looks at the end of step 8


STEP 9 OF 15

9 Climbing ramp

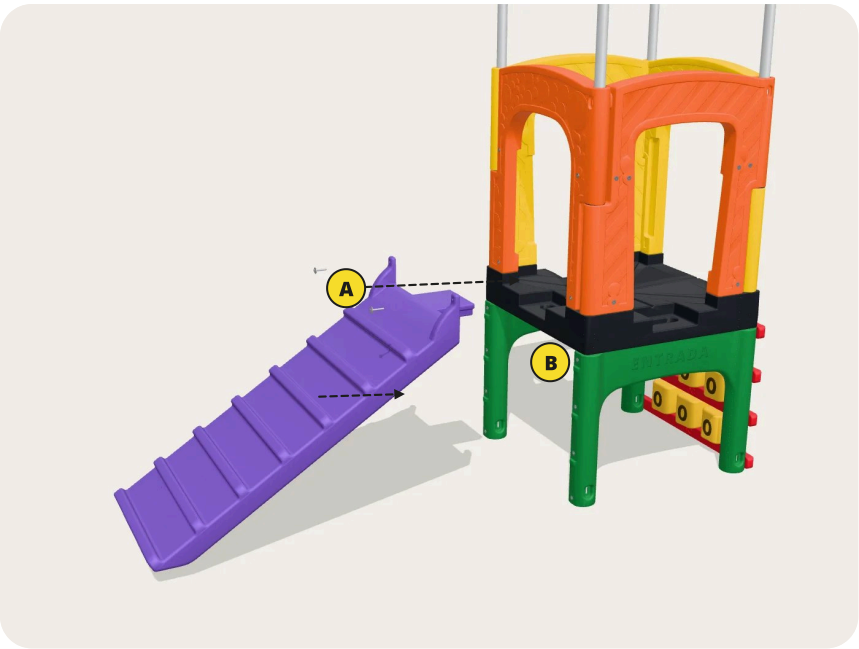

A 2 M6×45 screws in the wall

B 2 screws under the platform, from below

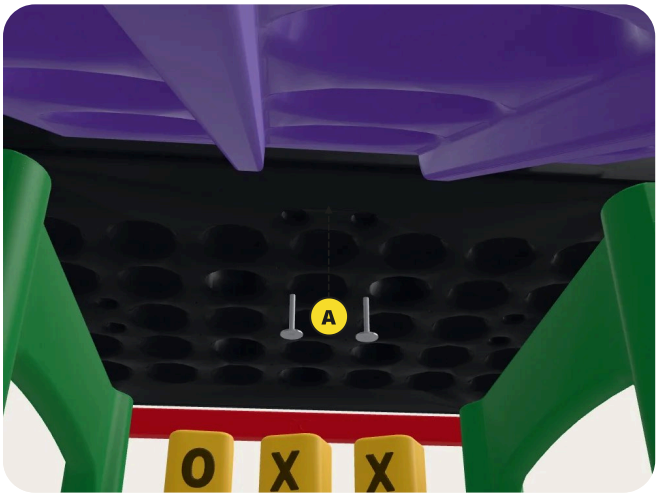

Fastening under the platform

A Under the platform: screw in from below

Fit the ramp and screw it to the wall and to the underside of the floor with **4 M6×45 screws with washer**: 2 on the wall and 2 under the floor.

CAUTION
Items fixed to the floor (ramp and slides) must be screwed **from the bottom up**.


PARTS FOR THIS STEP

1× Climbing ramp
ref. 998704

4× M6×45 hex screw
ref. 2090194

4× Washer
one on each screw

SCREW AND TOOL




Tool: **10 mm wrench.**



How it looks at the end of step 9

STEP 10 OF 15


10 Tunnel slide base

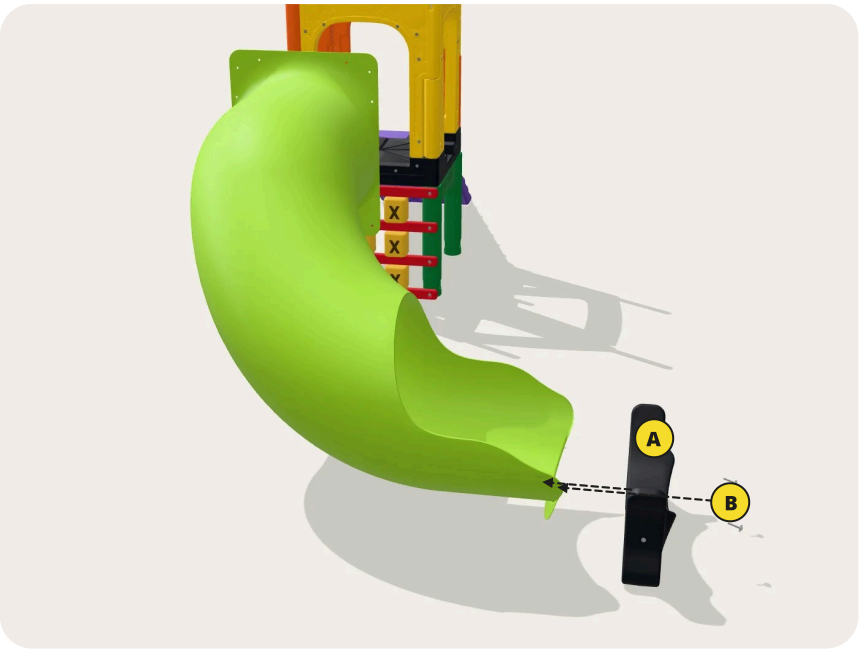

A Base at the front end of the tunnel slide

B 2 M6×45 screws + washer

SCREW AND TOOL

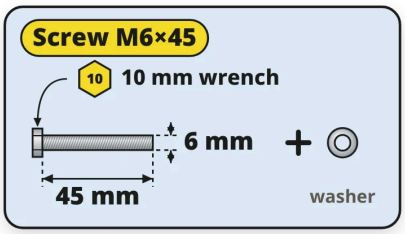

Tool: **10 mm wrench**.

With the tunnel on the ground, fit one of the bases on the **front end** of the slide and screw it on (**2 M6×45 screws with washers**).

> Do steps 10 and 11 with the tunnel next to the playground, before fixing it.

PARTS FOR THIS STEP


1× Tunnel slide ref. 998702	**1×** Tunnel slide base ref. 998714
2× M6×45 hex screw ref. 2090194	**2×** Washer one on each screw



How it looks at the end of step 10

STEP 11 OF 15


11 Second base and small crossbars

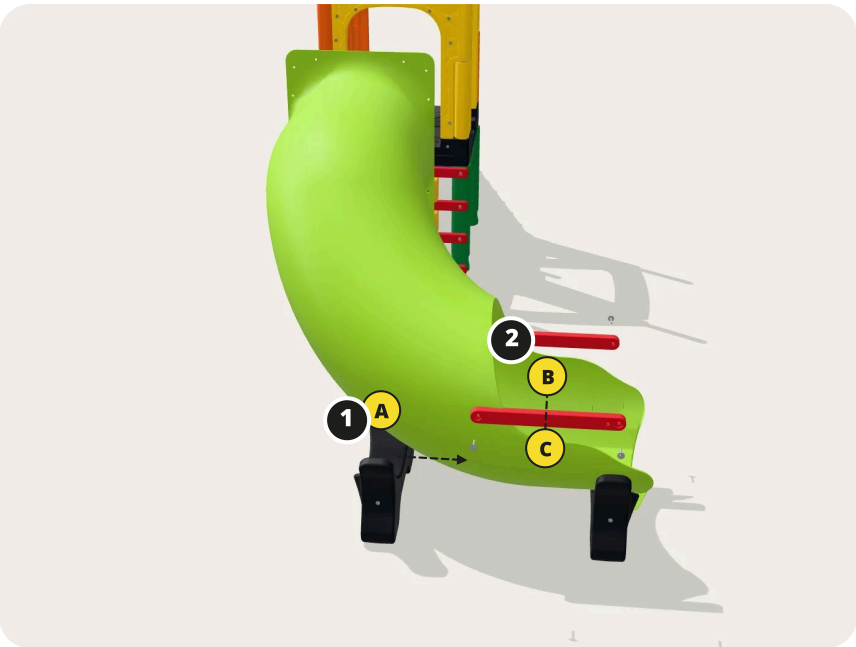

Place the second base and screw on the **small crossbars** to join the two bases (**4 M6×45 screws with washers**).

PARTS FOR THIS STEP


- **2×** Small crossbar ref. 953203
- **1×** Tunnel slide base ref. 998714
- **4×** M6×45 hex screw ref. 2090194
- **4×** Washer one on each screw

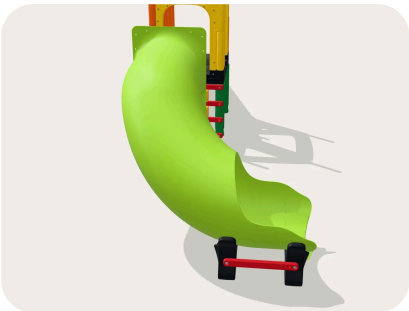

How it looks at the end of step 11

- **A** Second base
- **B** Small crossbars join the two bases
- **C** 4 M6×45 screws + washer


SCREW AND TOOL

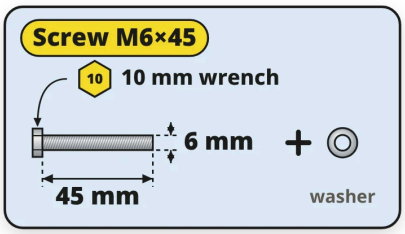


Tool: **10 mm wrench.**

STEP 12 OF 15

12 Tunnel slide

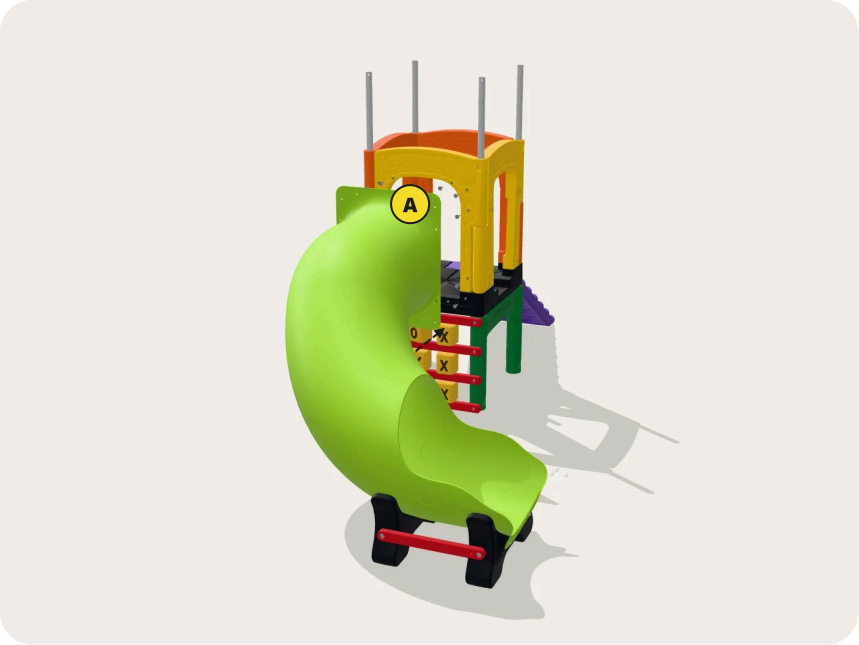

A 12 M6×45 screws: on the tunnel wall and the floor

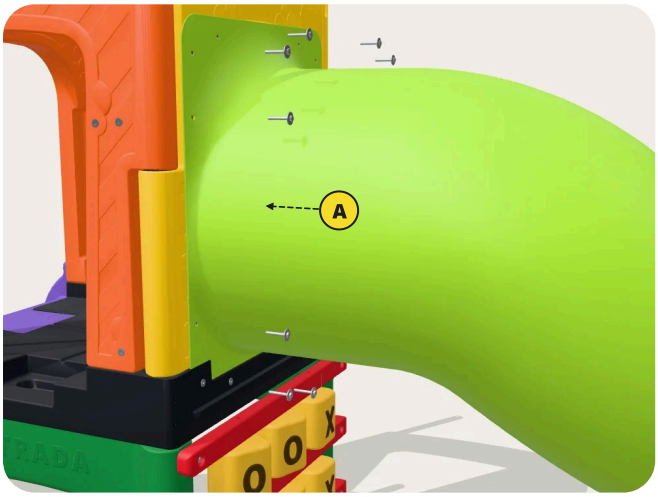

Tunnel slide screws

A M6×45 screw + washer: from outside in, on the wall and the floor


Fit the tunnel slide on the tunnel-side wall and screw it to the wall and the floor: **12 M6×45 screws with washer**.

PARTS FOR THIS STEP


12× M6×45 hex screw ref. 2090194

12× Washer one on each screw

SCREW AND TOOL




Tool: **10 mm wrench**.



How it looks at the end of step 12

STEP 13 OF 15

13 Curved slides

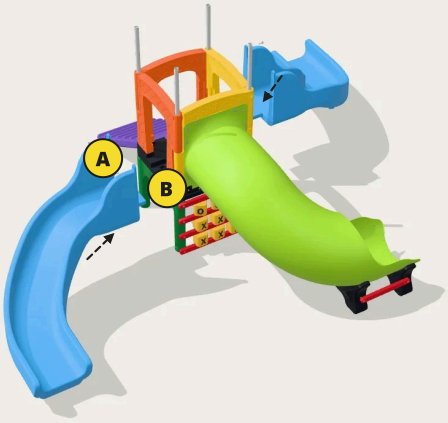

Fit the 2 curved slides and screw them on: **8 M6×45 screws with washer**.

Each slide has **2 fixing points on the wall** and **2 on the floor**; on the floor, screw from the bottom up.

A Each slide: 2 screws on the wall + 2 on the floor

B On the floor, from the bottom up


PARTS FOR THIS STEP

- **2×** Curved slide ref. 998703
- **8×** M6×45 hex screw ref. 2090194
- **8×** Washer one on each screw



How it looks at the end of step 13


SCREW AND TOOL

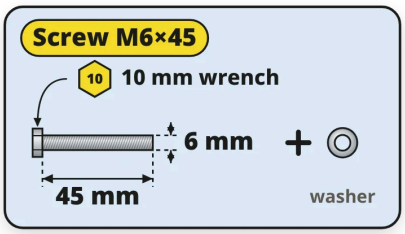


Tool: **10 mm wrench**.

STEP 14 OF 15

14 Join the walls

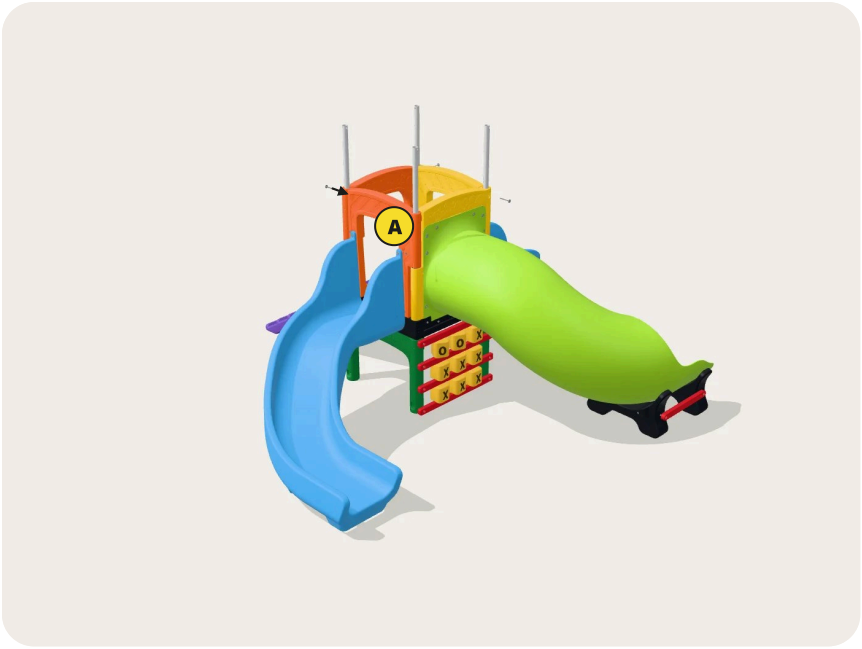

A 4 M6×90 screws go through the tubes (1 in each corner)

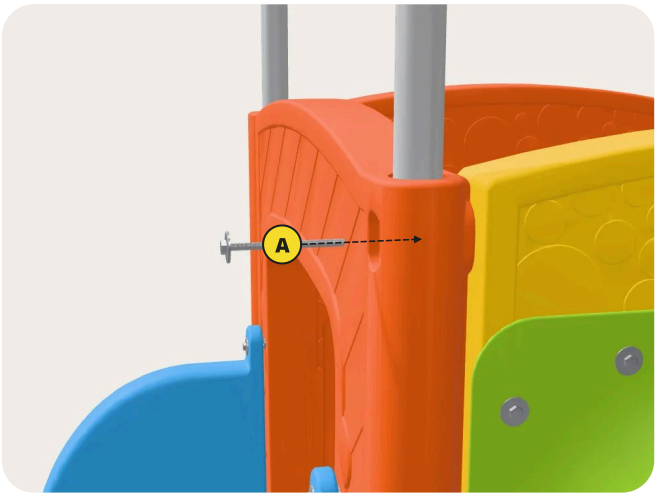

M6×90 screw going through the tube

A M6×90 screw + washer

Join the walls with the longer screws: **4 M6×90 screws with washers**, 1 in each corner, put in **from the outside in**.

The tubes have through holes for the screws.

PARTS FOR THIS STEP




4× M6×90 hex screw ref. 2090460




4× Washer one on each screw

SCREW AND TOOL



Tool: **10 mm wrench**.




How it looks at the end of step 14

STEP 15 OF 15

15 Roof



A The roof fits on the 4 tubes

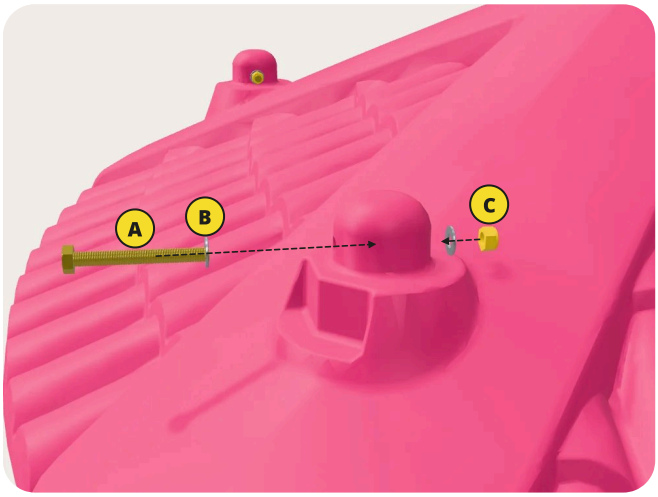

Roof fastening on each tube

A M8×70 screw

B M8 flat washer (on both sides)

C M8 self-locking nut (on the other side)

Place the roof on the 4 tubes.

In each corner, fasten with an **M8×70 screw**, an **M8 flat washer on each side** and an **M8 self-locking nut** (4 sets, 8 washers): the screw goes in with one washer on one side, and the other washer and the nut go on the other side.

PARTS FOR THIS STEP


1× Roof
ref. 998705

8× M8 flat washer
ref. 2090185

4× M8 self-locking nut, yellow
ref. 2090323

4× M8×70 hex screw (fully threaded)
ref. 2090329


SCREW AND TOOL

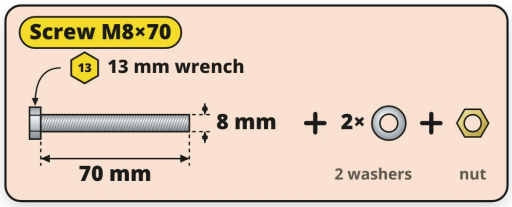

Tool: **2 × 13 mm wrenches**: one holds the nut while the other turns the screw.


FASTENING DETAILS

How each part is screwed on

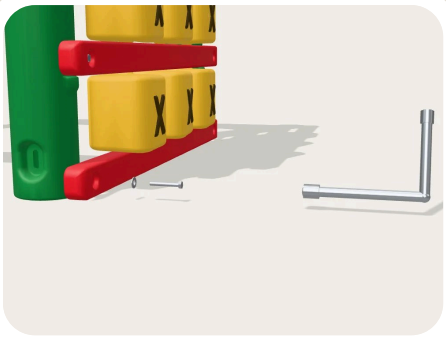

Tic-tac-toe

M6×45 screw + washer at each crossbar end, into the leg (8 in total). The screw sits recessed: use a 10 mm socket with extension or an L-shaped box wrench.

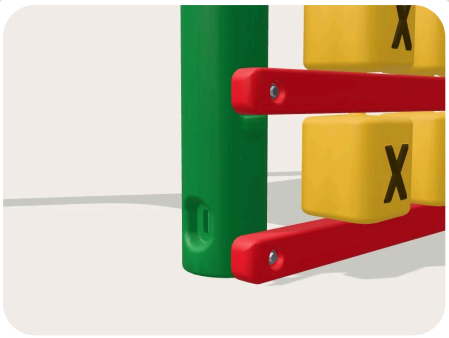


Tube in the leg

The tube's single hole goes at the bottom, lined up with the hole in the leg; the 2 holes go at the top.



Climbing ramp

M6×45 screw + washer: 2 in the wall, into the rivet nuts, and 2 under the platform, from below.

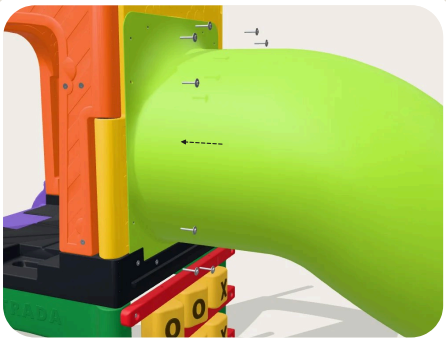


Tunnel slide

M6×45 screw + washer, from outside in, on the tunnel-side wall and the floor: 12 in total.



Wall

M6×90 screw + washer, from the outside in, through both walls and the tube. 1 in each corner.

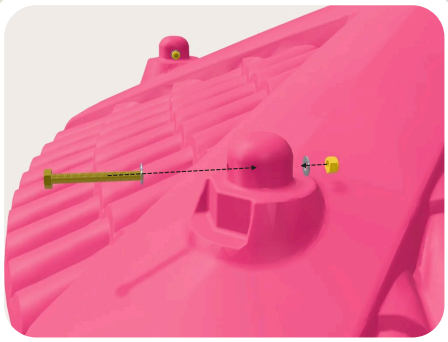

Roof

M8×70 screw with an M8 flat washer on each side and an M8 self-locking nut. 1 set on each tube.



Assembly complete

Check the product visually, making sure every part is fitted and firmly fastened. **Only then let children use it.**

Designed for one child at a time on the platform, maximum weight 23 kg.

INSTALLATION DETAILS

Location and safety area

To keep users safe, minimum spaces and free distances must be respected.

Circulation area: at least 1.20 m wide around the equipment, so users can run freely; at least 1.50 m where the path changes direction, so strollers and wheelchairs can get in and turn.

Fall space: neighboring static equipment with overlapping fall spaces must be at least 1.50 m apart for a fall height of up to 600 mm, and 2.50 m for higher falls. Maximum fall height of this product: **700 mm**.

Slide landing area: at least 1000 mm from the sides of the run-out section and 2000 mm (type 01 run-out) or 1000 mm (type 02 run-out) from the end of the run-out section.

Ground: an even, continuous, stable surface that is non-slip in any weather, with no obstacles and a cross slope of no more than 2%. Use on grass, sand, carpet or another soft, level surface.

Location: first check for chemicals and loose material (rubble, sharp objects). Choose an airy place with morning sun, sheltered from drafts; do not install it in basements or garages. Never use it near stairs, roads, swimming pools, water or slippery places. If the area is fenced, the gates must open outwards and be at least 1 m wide.

To avoid accidents, the child should wear shoes. This product is not intended for commercial use.

INSPECTION AND MAINTENANCE

Keep the playground safe

Visual inspection — daily

- Cleanliness
- Free distances between the ground and the equipment
- Ground surface finish and exposed foundations
- Sharp edges and missing components
- Excessive wear and structural integrity

Operational inspection — every 1 to 3 months

Pay special attention to the structural integrity of the product, besides the items of the visual inspection.

Main inspection — yearly

- Structure: bending, deformation and cracks
- Finish: cracks, chips, broken or open joints
- Missing, bent, broken, loose or worn parts
- Edges, pinch points, access points and protective surfaces

Maintenance

- Tighten the joining parts and clean (do not use paints, solvents or other chemicals)
- Keep the free spaces and drain holes clean
- Replace fasteners and faulty or worn parts

As per NBR 16071-7:2012. Any change that affects safety only after consulting the manufacturer.

XALINGO S/A INDÚSTRIA E COMÉRCIO – EM RECUPERAÇÃO JUDICIAL
BR 471, km 147 – Santa Cruz do Sul – RS – Brasil – CEP 96835-642
CNPJ 95.425.534/0001-76

SAC
(51) 3719-9800 · sac@xalingo.com.br
www.xalingo.com.br

Creative Play · ref. 0998.7
Keep this manual for future reference.