

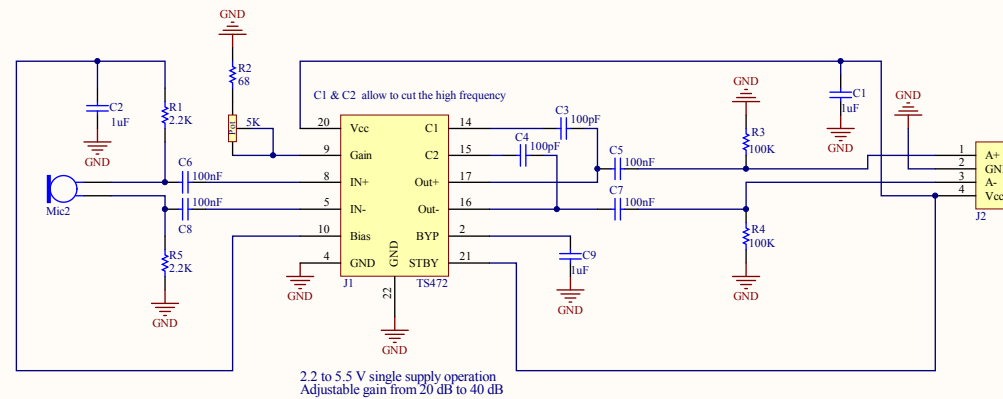


Microphone schematic using TS472 with a very low noise, 2.0V bias output and active low standby mode



Title: 8SoundsUSB-MIC		Author: M.Bandou	
Sheet: 1 of 1		Team members:	
Date: 2011-12-05		M.Bandou, A.Béland, G.Cayer, S.Choquette, F.Gosselin, F.Robitaille, D.Telly.Kizito	
Rev.: 2.0			
Released under Creative Common Licence Attribution-ShareAlike 2.5 Canada (CC BY-SA 2.5)			
Info.: <a href="http://sourceforge.net/projects/eightsoundsusb/">http://sourceforge.net/projects/eightsoundsusb/</a>		Checked by : S.Choquette	

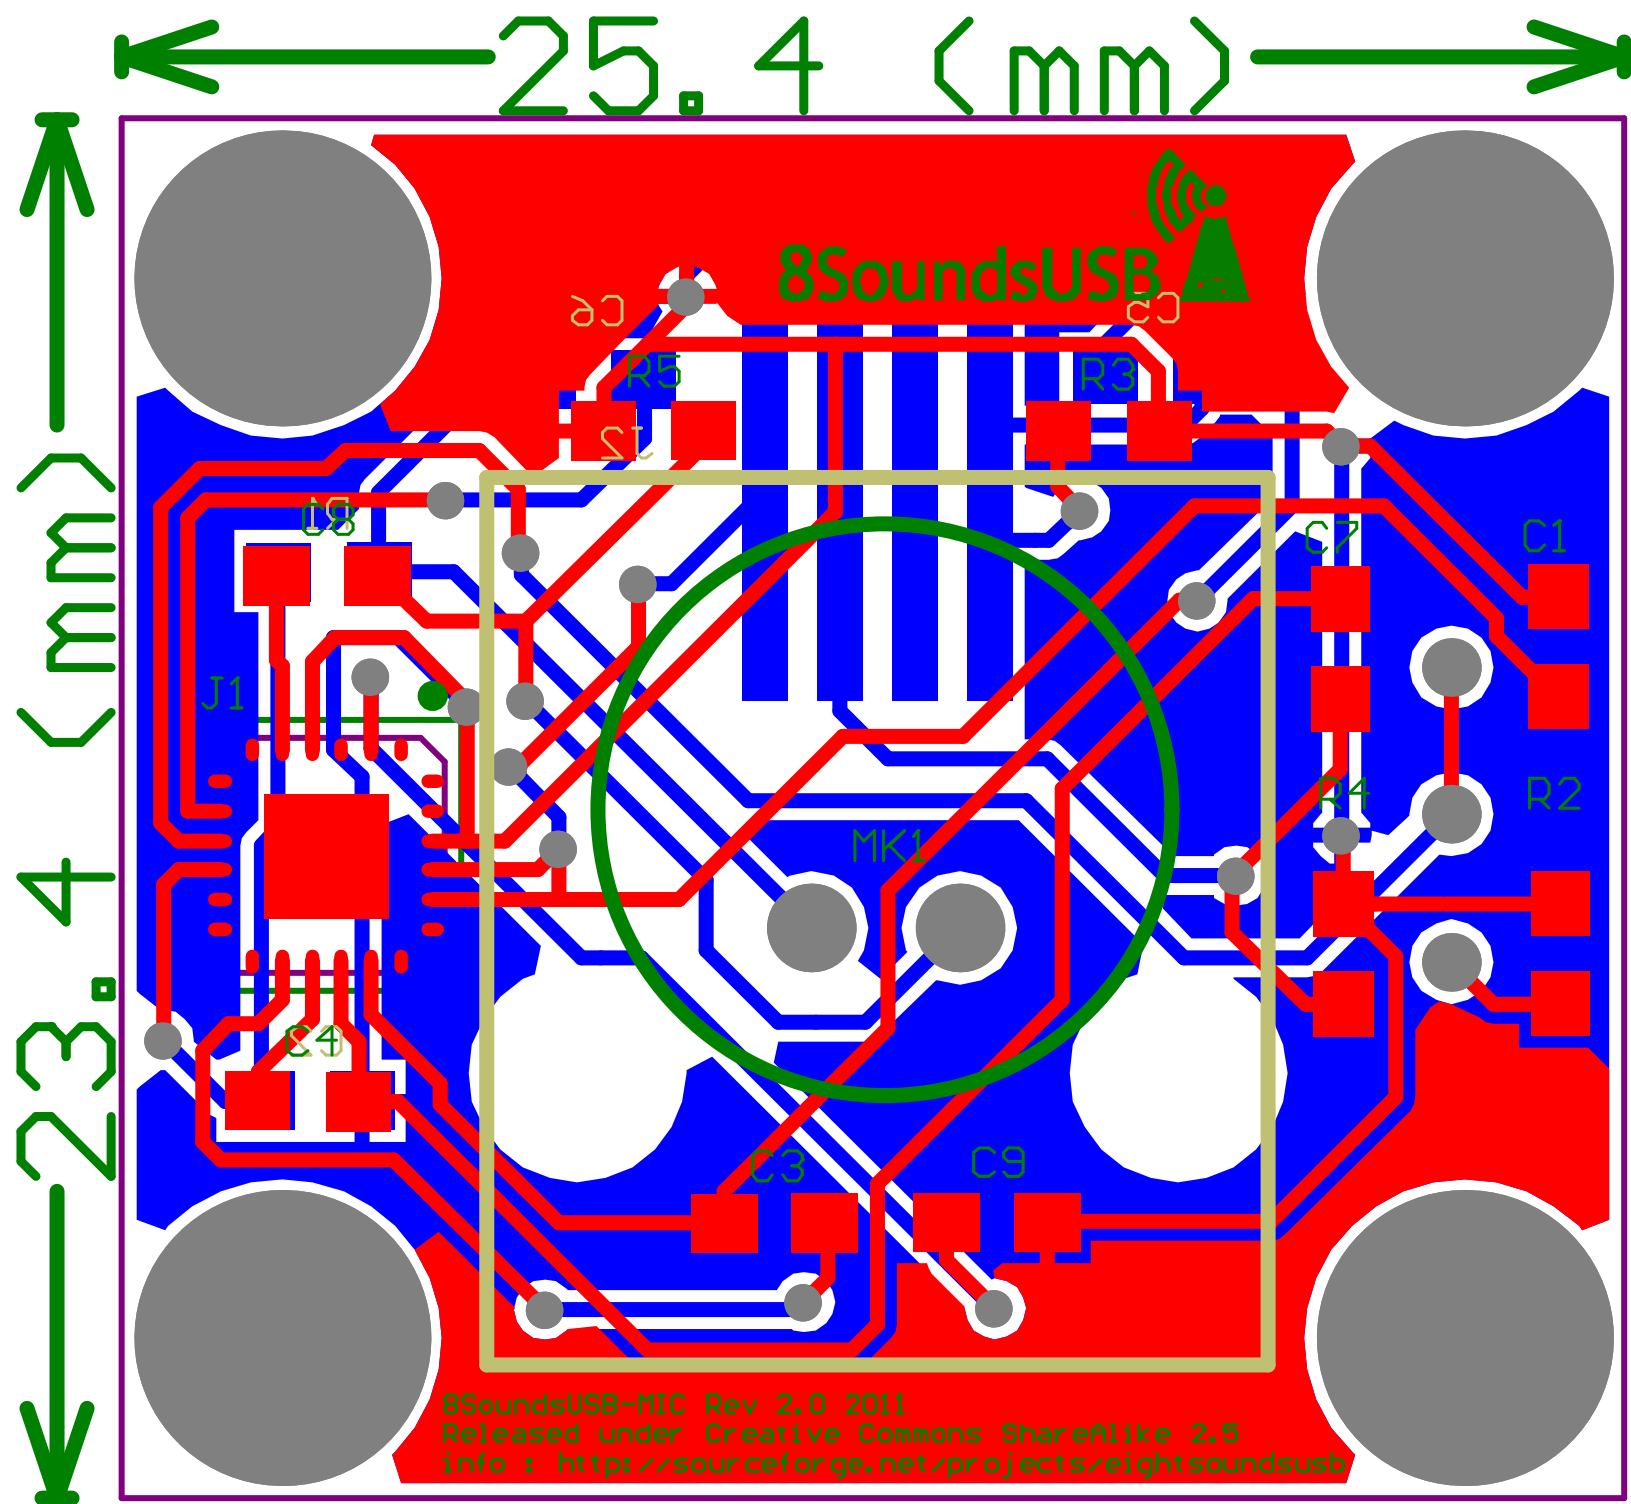

# Bill of Materials

8SoundsUSB-MIC

Source Data From:8SoundsUSB-MIC.PrjPcb

Project:8SoundsUSB-MIC.PrjPcb

Variant:None

Creation Date:2011-12-0820:34:44

Print Date:4088540885,8575

#Column Name	#Column Name Error	LibRef	Designator	#Column Name Error:Description	Quantity
		Cap	C1, C2, C9		3
		Cap	C3, C4		2
		Cap	C5, C6, C7, C8		4
		TS472	J1		1
		RJ-11-MIC	J2		1
		Mic2	MK1		1
		CT-94	pot		1
		Res1	R1, R5		2
		Res1	R2		1
		Res1	R3, R4		2
					18

ApprovedNotes

