
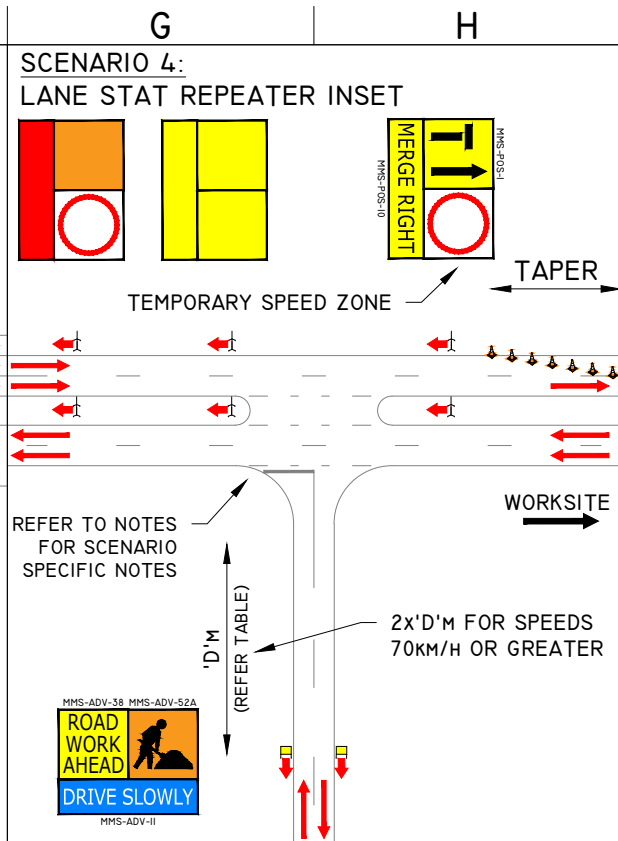
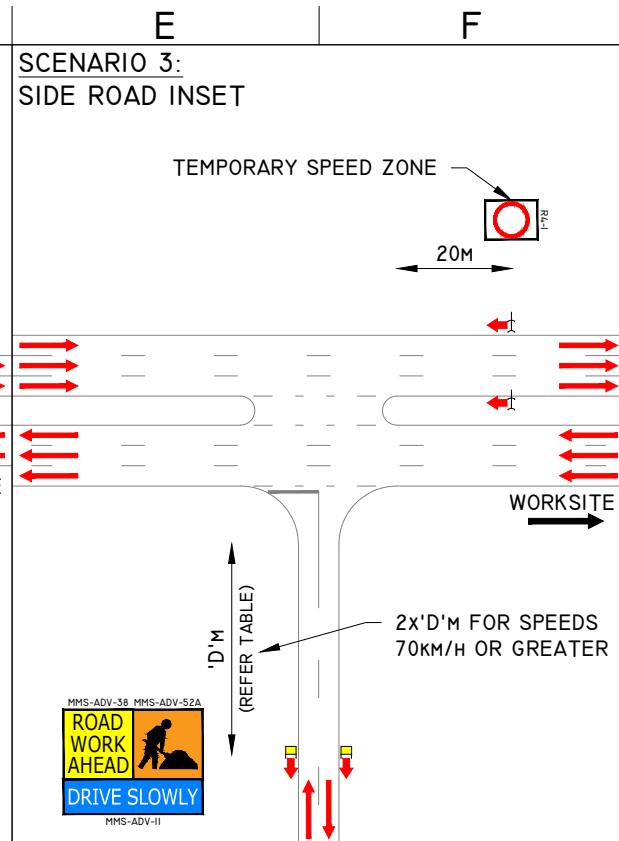
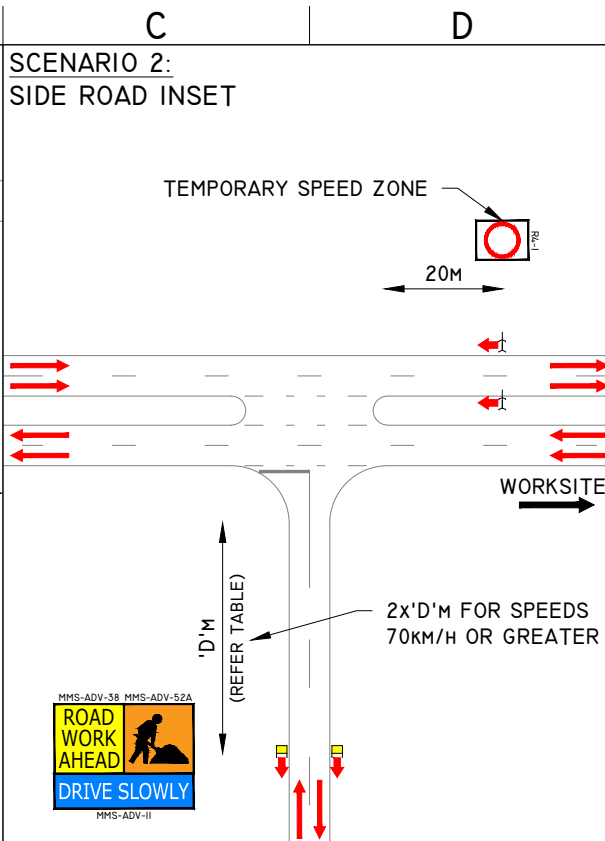


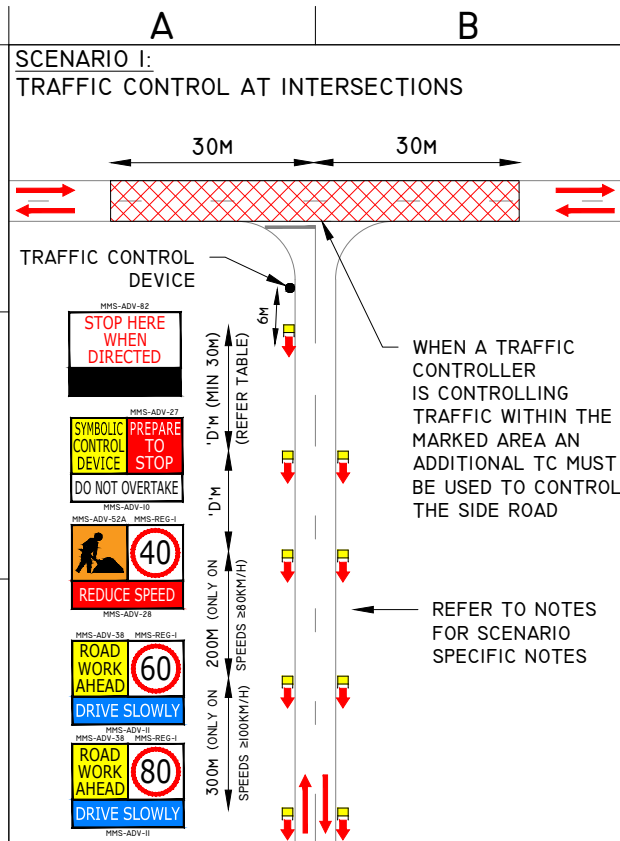

NOTES

TOLERANCES

POSITION OF SIGNS:

MINIMUM 10% LESS THAN THE DISTANCE OR LENGTHS GIVEN.

MAXIMUM 25% MORE THAN THE DISTANCES OR LENGTHS GIVEN.

SPACING OF DELINEATING DEVICES:

MAXIMUM 10% MORE THAN THE SPACING GIVEN.

NO MINIMUM.

AGTTM PART 6 SECTION 6.8.

DOCUMENTATION

ON-SITE VARIATIONS MUST BE APPROVED BY THE TRAFFIC MANAGEMENT SUPERVISOR, THAN AN ON-SITE VARIATION MADE AND CHANGES RECORDED IN THE DAILY DAIRY. FOR MORE INFORMATION REFER TO SECTION 9.3 OF THE TMP.

GENERAL NOTES

1. ALL SIGN LOCATIONS ARE TO BE CHECKED ON SITE PRIOR TO SETOUT AND POSITIONS ADJUSTED AS PER THE 'TOLERANCES'.
2. FOR BOX EDGED SIGN ALTERNATIVES, CONSULT AWTM PRIOR TO IMPLEMENTATION.





SCENARIO 1 NOTES

1. REFER TO TRAFFIC CONTROL PROCEDURES FOR SYMBOLIC TRAFFIC CONTROL DEVICE SIGNAGE
2. REFER TO TRAFFIC CONTROL PROCEDURES FOR THE SELECTION OF TRAFFIC MANAGEMENT DEVICES

SCENARIO 4 NOTES

1. DRAWING IS INDICATIVE ONLY AND LANE CLOSURES CAN BE DEPLOYED STARTING FROM EITHER THE SLOW LANE OR THE FAST LANE.
2. LANE STATUS AND LANE CLOSURE MAY BE MIRRORED WHEN A CLOSURE OF THE MEDIAN LANE IS REQUIRED.

TABLES SIGN SPACING <i>AGTTM PART 3 - TABLE 2.2</i>	
SPEED LIMIT (KM/H)	DISTANCE ('D') (M)
55 OR LESS	15
56 TO 65	45
GREATER THAN 65	EQUAL TO SPEED OF TRAFFIC IN KM/H

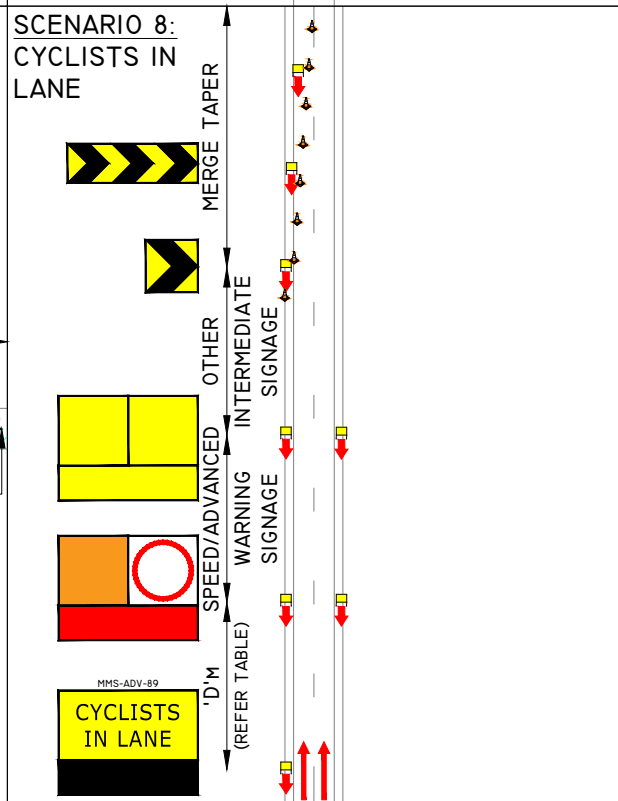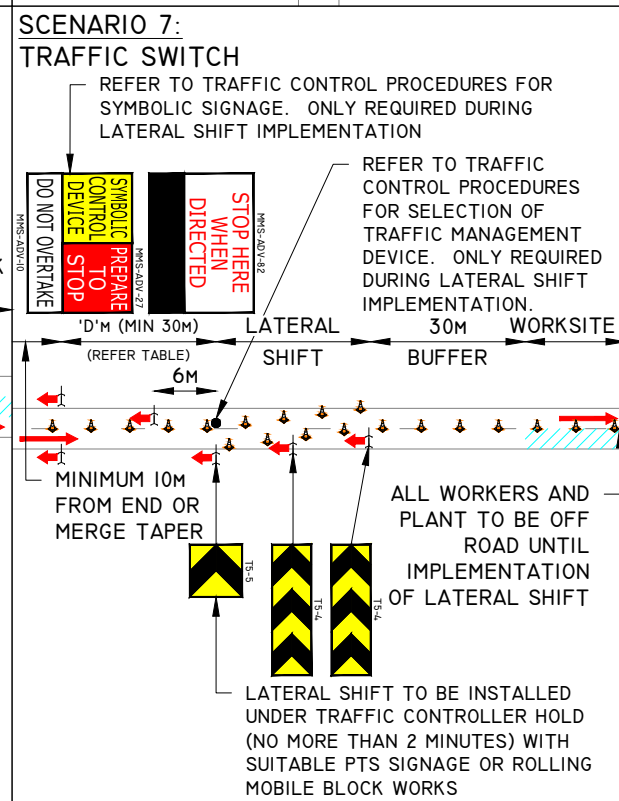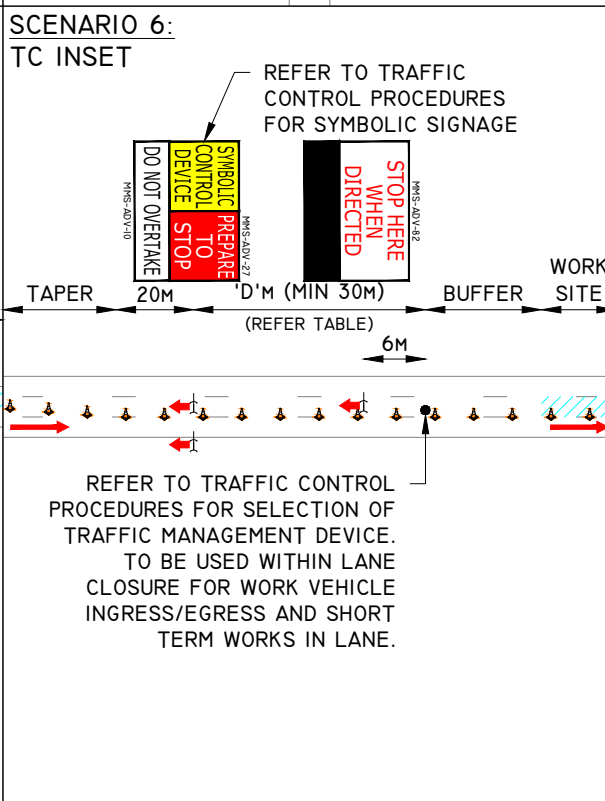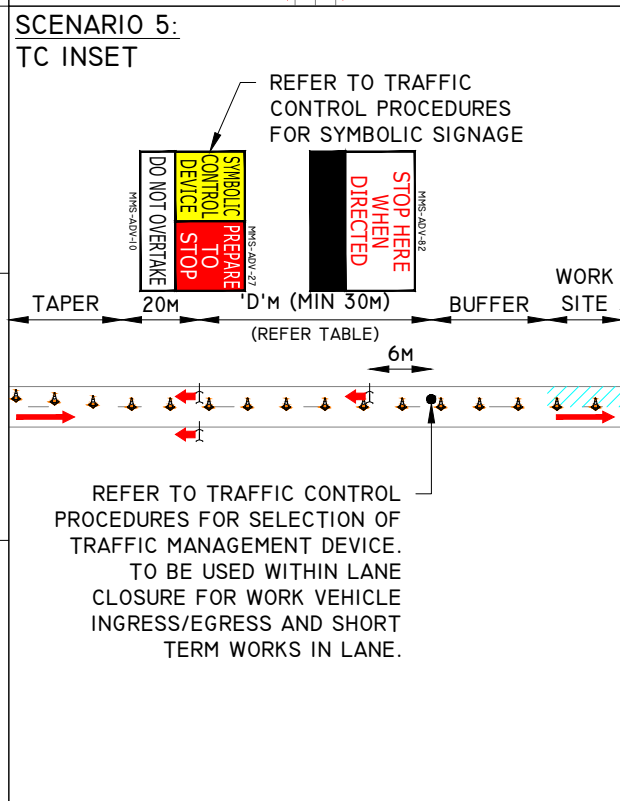

LEGEND	
	EXISTING ROAD
	PROPOSED CONES
	WORKSITE



mainroads
 WESTERN AUSTRALIA


METROPOLITAN REGIONS
 TRAFFIC MANAGEMENT BRANCH

WATERLOO CRESCENT
 TELEPHONE (08) 138 138

EAST PERTH 6004



TRAFFIC CONTROL PROCEDURES


REFER TO TMP SECTION 4.1.7 PORTABLE TRAFFIC CONTROL DEVICES FOR MORE DETAILS	
MANUAL TRAFFIC CONTROL	

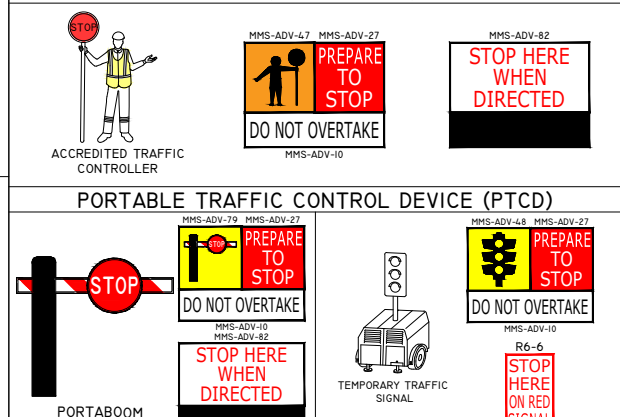

MANUAL TRAFFIC CONTROL IS NOT PERMITTED ON THE MAIN ROADS NETWORK WITH THE EXCEPTIONS LISTED UNDER SECTION 4.1.7 (PORTABLE TRAFFIC CONTROL DEVICES) OF THE TMP AND IN THE MAIN ROADS CODE OF PRACTICE.

- ON ALL OTHER ROADS, PTCDS MUST BE USED UNDER THE FOLLOWING CONDITIONS:
- A PERMANENT SPEED LIMIT OF 90m/h OR MORE AND OVER 2,000VPD; OR
 - A PERMANENT SPEED LIMIT OF 80km/h OR MORE AND OVER 10,000VPD.
- PTCDs SHOULD BE CONSIDERED ON ALL WORKS AND ONLY BE SUPPLEMENTED WITH MANUAL TRAFFIC CONTROL UNDER AN AWTM/WTM RISK ASSESSMENT.

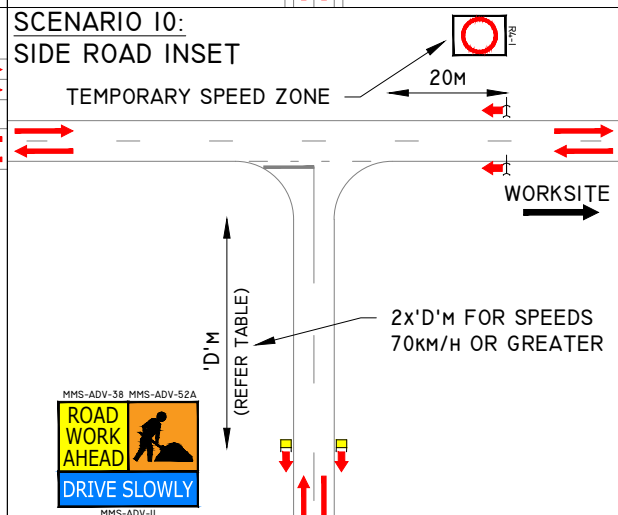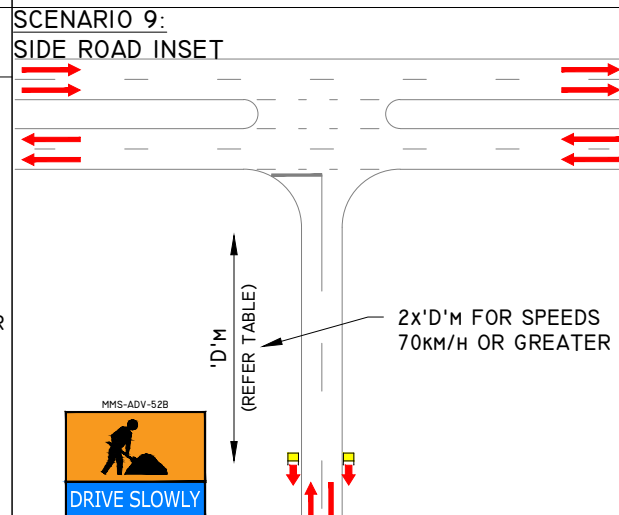

DATE OF DRAWING 2025 JULY		SCALE -
LOCAL GOVERNMENT AUTHORITY -		POSTED SPEED -
ROAD AUTHORITY MAIN ROADS WA		WORKSITE SPEED -
CHECKED BY TYLER HARTLEY		SIGNATURE 
ACCREDITATION RTM-0066		SIGNATURE 
DESIGNED BY MICHAEL REED		
ACCREDITATION AWTM-23-II536-02		
GENERIC TRAFFIC GUIDANCE SCHEME LANE CLOSURE SETUPS MULTIPLE ROAD CONFIGURATIONS SIDE ROAD INSETS		
DRAWING NO 0922-01531-LC-101		REVISION 6