

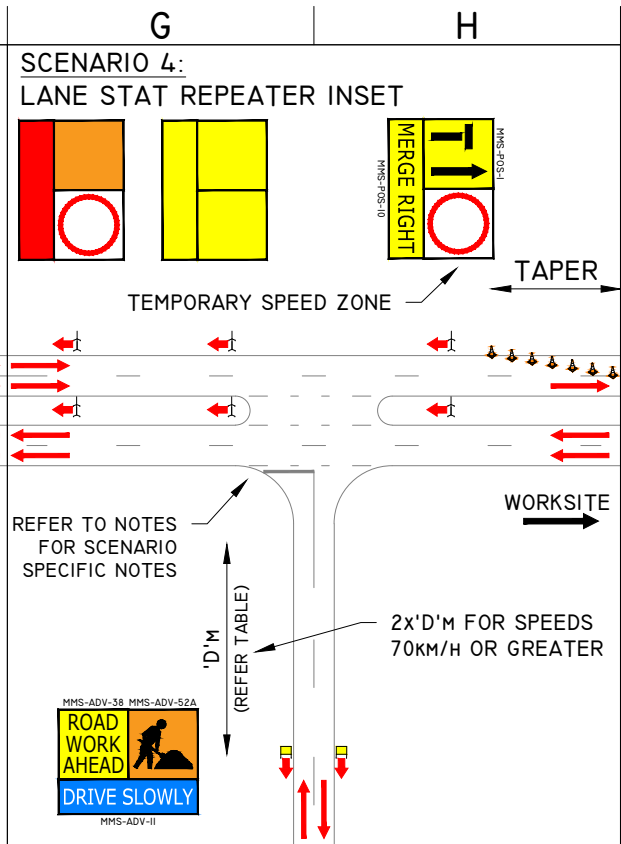
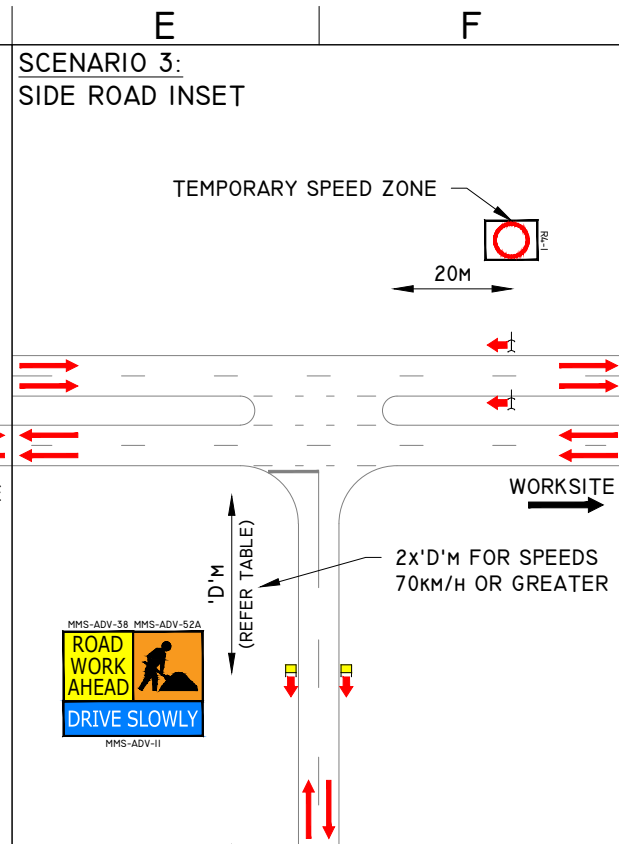
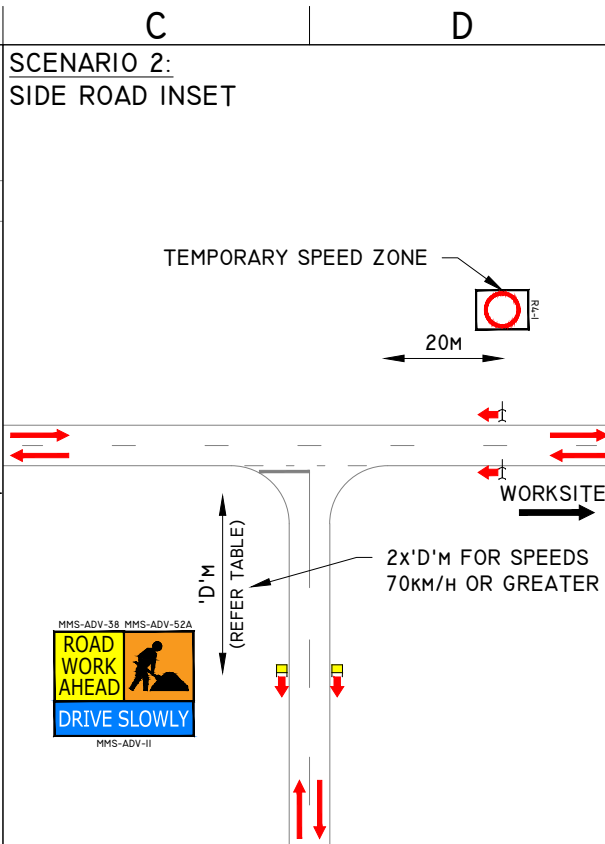
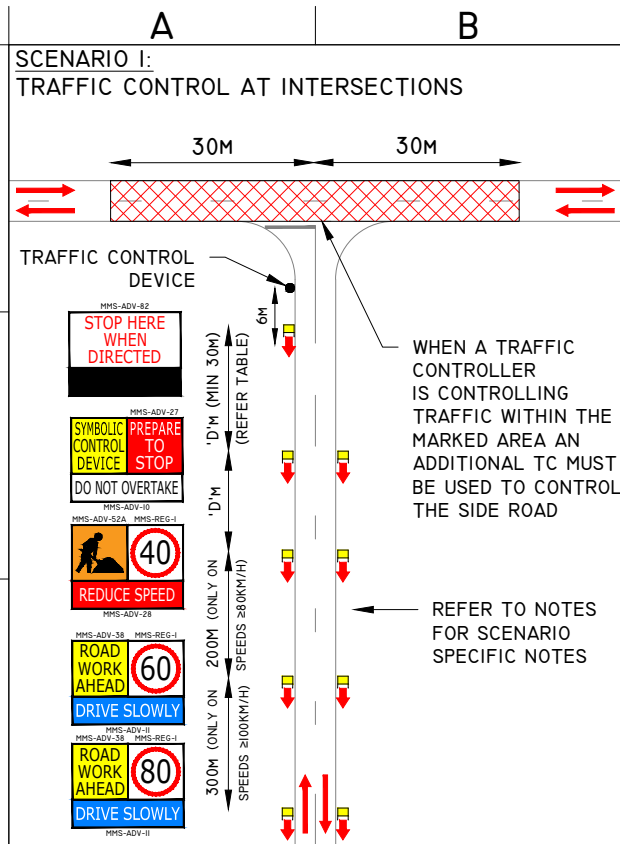
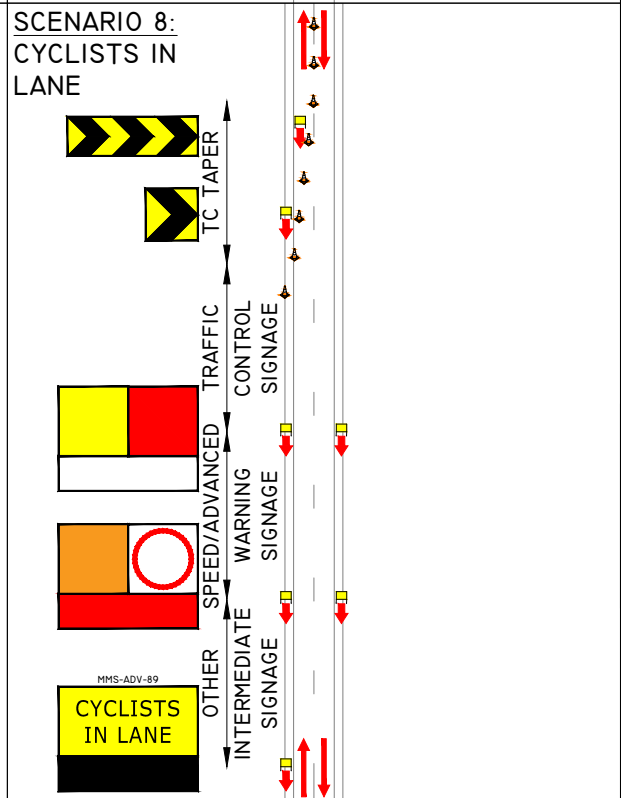
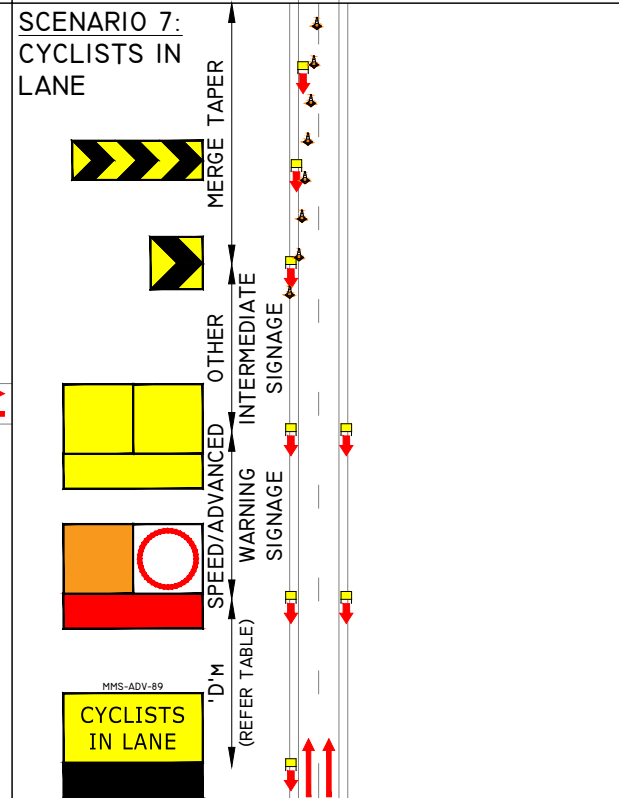


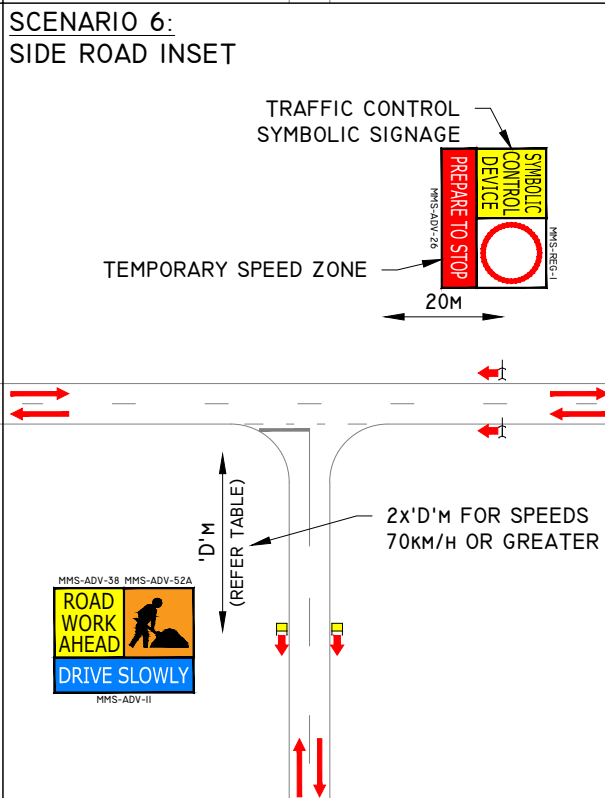


	NOTES <u>TOLERANCES</u> POSITION OF SIGNS: MINIMUM 10% LESS THAN THE DISTANCE OR LENGTHS GIVEN. MAXIMUM 25% MORE THAN THE DISTANCES OR LENGTHS GIVEN. SPACING OF DELINEATING DEVICES: MAXIMUM 10% MORE THAN THE SPACING GIVEN. NO MINIMUM. <i>AGTTM PART 6 SECTION 6.8.</i> <u>DOCUMENTATION</u> ON-SITE VARIATIONS MUST BE APPROVED BY THE TRAFFIC MANAGEMENT SUPERVISOR, THAN AN ON-SITE VARIATION MADE AND CHANGES RECORDED IN THE DAILY DAIRY. FOR MORE INFORMATION REFER TO SECTION 9.3 OF THE TMP. <u>GENERAL NOTES</u> 1. ALL SIGN LOCATIONS ARE TO BE CHECKED ON SITE PRIOR TO SETOUT AND POSITIONS ADJUSTED AS PER THE 'TOLERANCES'. 2. FOR BOX EDGED SIGN ALTERNATIVES, CONSULT AWTM PRIOR TO IMPLEMENTATION. 3. SLOW SIDE OF THE TRAFFIC CONTROL BAT TO BE COVERED FOR RAIL APPROACHES. <u>SCENARIO 1 NOTES</u> 1. REFER TO TRAFFIC CONTROL PROCEDURES FOR SYMBOLIC TRAFFIC CONTROL DEVICE SIGNAGE 2. REFER TO TRAFFIC CONTROL PROCEDURES FOR THE SELECTION OF TRAFFIC MANAGEMENT DEVICES <u>SCENARIO 4 NOTES</u> 1. DRAWING IS INDICATIVE ONLY AND LANE CLOSURES CAN BE DEPLOYED STARTING FROM EITHER THE SLOW LANE OR THE FAST LANE. 2. LANE STATUS AND LANE CLOSURE MAY BE MIRRORED WHEN A CLOSURE OF THE MEDIAN LANE IS REQUIRED.	1 2 3
--	--	--

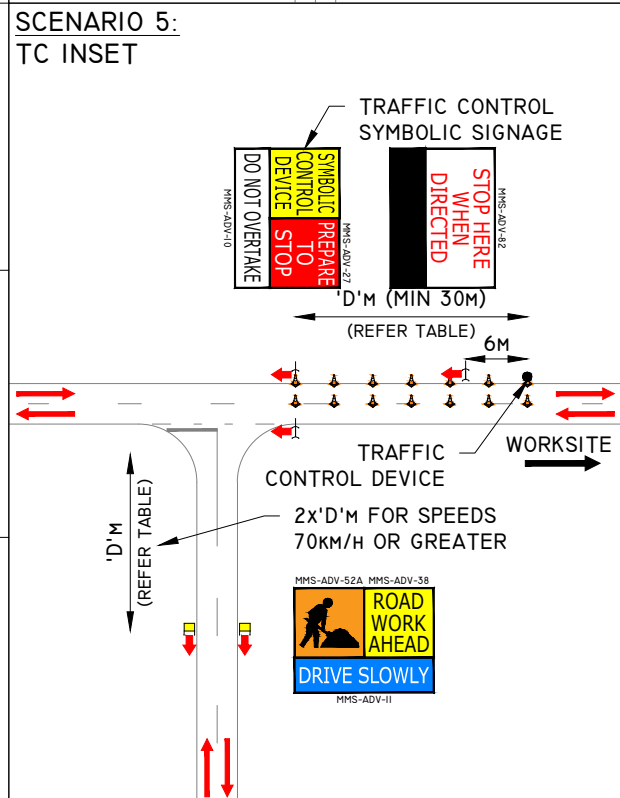

TABLES		4
SIGN SPACING		
AGTTM PART 3 - TABLE 2.2		
SPEED LIMIT (KM/H)	DISTANCE ('D') (M)	
55 OR LESS	15	
56 TO 65	45	
GREATER THAN 65	EQUAL TO SPEED OF TRAFFIC IN KM/H	


		5
LEGEND		
	EXISTING ROAD	
	EXISTING RAILWAY TRACKS	
	PROPOSED CONES	
	WORKSITE	

DATE OF DRAWING 2025 JULY	SCALE -	7
LOCAL GOVERNMENT AUTHORITY -	POSTED SPEED -	
ROAD AUTHORITY MAIN ROADS WA	WORKSITE SPEED -	
CHECKED BY TYLER HARTLEY	SIGNATURE 	
ACCREDITATION RTM-0066		
DESIGNED BY MICHAEL REED	SIGNATURE 	
ACCREDITATION AWTM-2011536-02		

GENERIC TRAFFIC GUIDANCE SCHEME RAIL APPROACH SETUPS MULTIPLE ROAD CONFIGURATIONS SIDE ROAD INSETS		8
DRAWING NO 0922-01531-RA-I01		REVISION 6

TRAFFIC CONTROL PROCEDURES

REFER TO TMP SECTION 4.1.7 PORTABLE TRAFFIC CONTROL DEVICES FOR MORE DETAILS

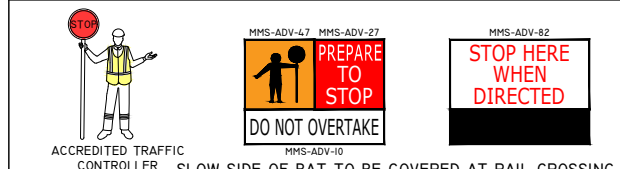

MANUAL TRAFFIC CONTROL IS NOT PERMITTED ON THE MAIN ROADS NETWORK WITH THE EXCEPTIONS LISTED UNDER SECTION 4.1.7 (PORTABLE TRAFFIC CONTROL DEVICES) OF THE TMP AND IN THE MAIN ROADS CODE OF PRACTICE.

- ON ALL OTHER ROADS, PTCds MUST BE USED UNDER THE FOLLOWING CONDITIONS:
- A PERMANENT SPEED LIMIT OF 90m/h OR MORE AND OVER 2,000vpd; OR
 - A PERMANENT SPEED LIMIT OF 80km/h OR MORE AND OVER 10,000vpd.
- PTCDs SHOULD BE CONSIDERED ON ALL WORKS AND ONLY BE SUPPLEMENTED WITH MANUAL TRAFFIC CONTROL UNDER AN AWTM/WTM RISK ASSESSMENT.

