


SCENARIO 1:
CYCLISTS IN LANE

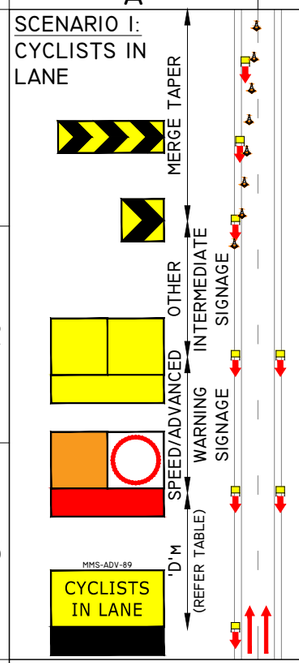


SCENARIO 2:
CYCLISTS IN LANE

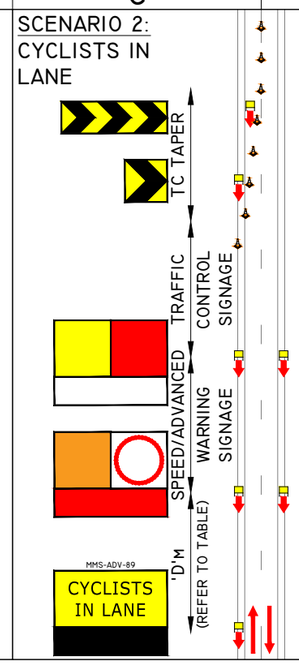

SCENARIO 3:
TRAFFIC CONTROL AT INTERSECTIONS

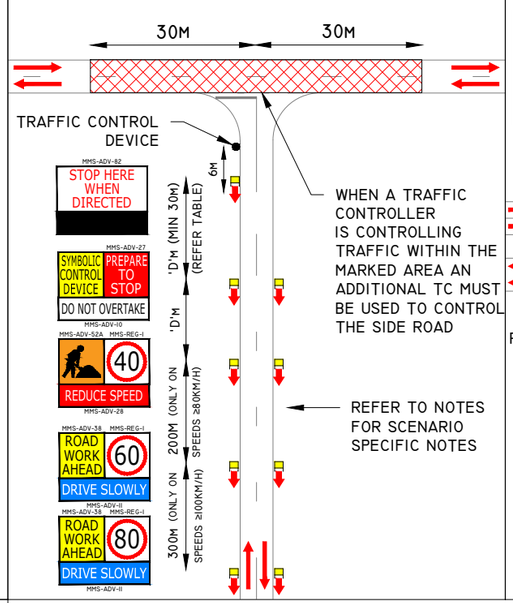

SCENARIO 4:
LANE STAT REPEATER INSET

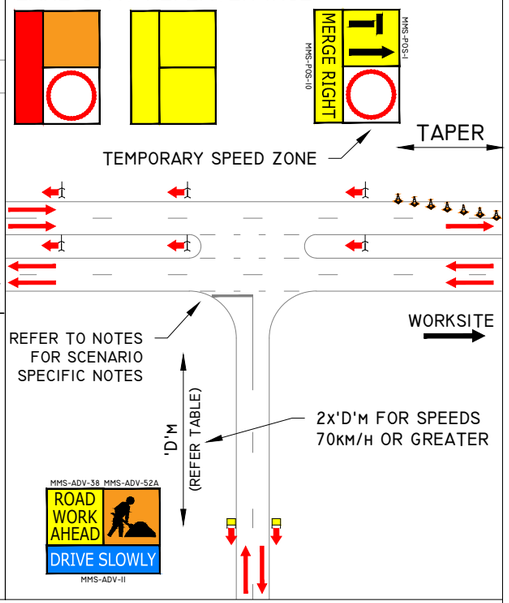


SCENARIO 5:
PILOT VEHICLE


DISPLAY 1
PILOT VEHICLE FOLLOW ME

PILOT VEHICLE

PILOT VEHICLE TO FIND SUITABLE TURN AROUND LOCATION, PULL OFF ROAD AND ALLOW VEHICLES TO PASS BEFORE JOINING FRONT OF QUEUE.

PILOT VEHICLE MUST CONFIRM ALL TRAFFIC IS CLEAR BEFORE TURNING AROUND TO AVOID COLLISIONS.



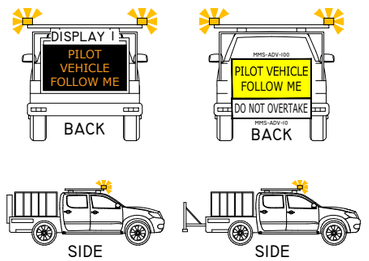

PILOT VEHICLE OPERATION

1. MINIMUM 2x PILOT VEHICLES TO BE USED. 1x VEHICLE POSITIONED IN DIRECTION OF RELEASED TRAFFIC 1x VEHICLE AS A BACKUP.
2. TC RELEASES TRAFFIC IN ONE DIRECTION UNDER THE GUIDANCE OF PILOT VEHICLE. PILOT VEHICLE TO DIRECT MOTORISTS SAFELY PAST THE WORKSITE.
3. PILOT VEHICLE TO PULL OFF ROAD AT SAFE LOCATION, LET TRAFFIC PASS AND TURN AROUND TO JOIN FRONT OF QUEUE READY FOR NEXT TRAFFIC RELEASE.


TRAFFIC CONTROL PROCEDURES

REFER TO TMP SECTION 4.1.7 PORTABLE TRAFFIC CONTROL DEVICES FOR MORE DETAILS

MANUAL TRAFFIC CONTROL



PORTABLE TRAFFIC CONTROL DEVICE (PTCD)

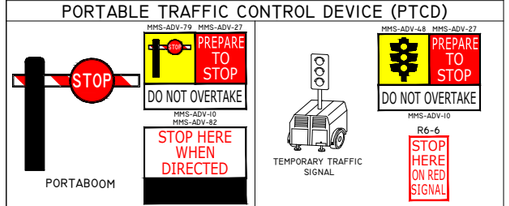

MANUAL TRAFFIC CONTROL IS NOT PERMITTED ON THE MAIN ROADS NETWORK WITH THE EXCEPTIONS LISTED UNDER SECTION 4.1.7 (PORTABLE TRAFFIC CONTROL DEVICES) OF THE TMP AND IN THE MAIN ROADS CODE OF PRACTICE.

ON ALL OTHER ROADS, PTCDs MUST BE USED UNDER THE FOLLOWING CONDITIONS:

- A PERMANENT SPEED LIMIT OF 90KM/H OR MORE AND OVER 2,000VPD; OR
- A PERMANENT SPEED LIMIT OF 80KM/H OR MORE AND OVER 10,000VPD.

PTCDs SHOULD BE CONSIDERED ON ALL WORKS AND ONLY BE SUPPLEMENTED WITH MANUAL TRAFFIC CONTROL UNDER AN AWTM/WTM RISK ASSESSMENT.

NOTES

TOLERANCES

POSITION OF SIGNS:
MINIMUM 10% LESS THAN THE DISTANCE OR LENGTHS GIVEN.
MAXIMUM 25% MORE THAN THE DISTANCES OR LENGTHS GIVEN.
SPACING OF DELINEATING DEVICES:
MAXIMUM 10% MORE THAN THE SPACING GIVEN.
NO MINIMUM.
AGTTM PART 6 SECTION 6.8.

DOCUMENTATION

ON-SITE VARIATIONS MUST BE APPROVED BY THE TRAFFIC MANAGEMENT SUPERVISOR, THAN AN ON-SITE VARIATION MADE AND CHANGES RECORDED IN THE DAILY DAIRY. FOR MORE INFORMATION REFER TO SECTION 9.3 OF THE TMP.

GENERAL NOTES

1. ALL SIGN LOCATIONS ARE TO BE CHECKED ON SITE PRIOR TO SETOUT AND POSITIONS ADJUSTED AS PER THE 'TOLERANCES'.
2. FOR BOX EDGED SIGN ALTERNATIVES, CONSULT AWTM PRIOR TO IMPLEMENTATION.

SCENARIO 3 NOTES

1. REFER TO TRAFFIC CONTROL PROCEDURES FOR SYMBOLIC TRAFFIC CONTROL DEVICE SIGNAGE
2. REFER TO TRAFFIC CONTROL PROCEDURES FOR THE SELECTION OF TRAFFIC MANAGEMENT DEVICES

SCENARIO 4 NOTES

1. DRAWING IS INDICATIVE ONLY AND LANE CLOSURES CAN BE DEPLOYED STARTING FROM EITHER THE SLOW LANE OR THE FAST LANE.
2. LANE STATUS AND LANE CLOSURE MAY BE MIRRORED WHEN A CLOSURE OF THE MEDIAN LANE IS REQUIRED.

SCENARIO 5 NOTES

1. PILOT VEHICLES MUST BE USED WITH TRAFFIC CONTROL CONTROLLING TRAFFIC ON EITHER SIDE OF THE OPERATION.
2. ROAD LAYOUT IS INDICATIVE ONLY AND THIS INSET MUST BE USED IN CONJUNCTION WITH AN RF DRAWING (EXCLUDING RF-008).

TABLES

SIGN SPACING

AGTTM PART 3 - TABLE 2.2

SPEED LIMIT (KM/H)	DISTANCE ('D') (M)
55 OR LESS	15
56 TO 65	45
GREATER THAN 65	EQUAL TO SPEED OF TRAFFIC IN KM/H

LEGEND

EXISTING ROAD
PROPOSED CONES

mainroads WESTERN AUSTRALIA

METROPOLITAN REGIONS
TRAFFIC MANAGEMENT BRANCH
WATERLOO CRESCENT EAST PERTH 6004
TELEPHONE (08) 138 138

DATE OF DRAWING: 2025 JULY	SCALE: -
LOCAL GOVERNMENT AUTHORITY: -	POSTED SPEED: -
ROAD AUTHORITY: MAIN ROADS WA	WORKSITE SPEED: -
CHECKED BY: TYLER HARTLEY	SIGNATURE: Tyler Hartley
ACCREDITATION: RTM-0066	
DESIGNED BY: MICHAEL REED	SIGNATURE:
ACCREDITATION: AWTM-23-11536-02	

GENERIC TRAFFIC GUIDANCE SCHEME
REVERSIBLE FLOW SETUPS
MULTIPLE ROAD CONFIGURATIONS
SIDE ROAD INSETS

DRAWING NO	REVISION
0922-01531-RF-102	6