


A TMD may apply tolerances (see AGTTM Part 6 Section 6.8) to the spacing requirements for signs and devices when preparing the design of a TGS.

See Figure 2.5.3(a) for the tolerances that apply to a sign spacing.

If a TMD applies a tolerance, which is either the minimum or maximum allowable (as per the above or AGTTM Part 6 Section 6.8), or is so close to the maximum or minimum such that a TMI also applying the maximum tolerance as per AGTTM Part 6 Section 6.8 on site may exceed the total allowable tolerance, or uses the provisions above to increase the spacing, the TMD must specify this distance as either a minimum or maximum (or provide the maximum or minimum value) on the TGS so that a tolerance is not also applied on site by the TMI which would then exceed any applicable limits.

Figure 2.5.3(a) – Sign spacing tolerances

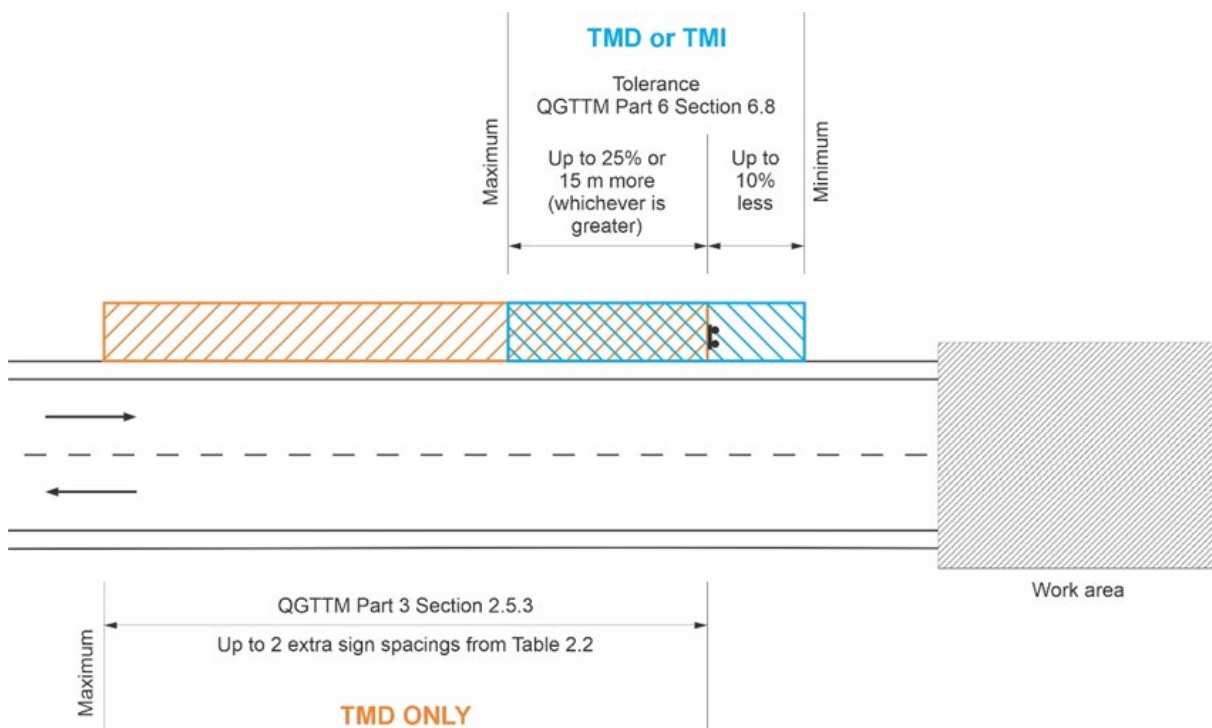

While any sign may be installed in a permanent manner on posts sunk into the ground, signs required for works which will be in progress for longer than 14 days (that are not exclusively targeting pedestrians) should be installed in a permanent manner on posts sunk into the ground. Check that underground utilities are not located below and making holes is approved by the relevant road authority. Ensure regular site inspection, maintenance and securing practices occur in these circumstances. In these situations, the installation height of all temporary signs mounted in a permanent manner must be based on the requirements in AGTTM Part 6 Section 6.6.1 and AS1742.3 clause 4.3.2. Signs directed exclusively towards