

## 5.4.2 Temporary hazard markers

### Difference


Replace the dot point:

- Repeated markers must be spaced so they appear as a continuous line to approaching road users.

with:

- Repeated larger Temporary Hazard markers (T5-4 or 2 x TM5-5A panels in a multi-message frame arrangement – see Figure 5.4.2) must be spaced so they appear as a continuous line to approaching road users.
- The smaller Temporary Hazard markers (T5-5 or T5-7 - see Figure 5.4.2) should be installed in a minimum group of three for a 3.0 m–3.5 m-wide taper, with one hazard marker at the start of the taper, another at the end of the taper and a third hazard marker at the approximate mid-point of the taper for approaching road users.

**Figure 5.4.2 – Types of Temporary Hazard marker**

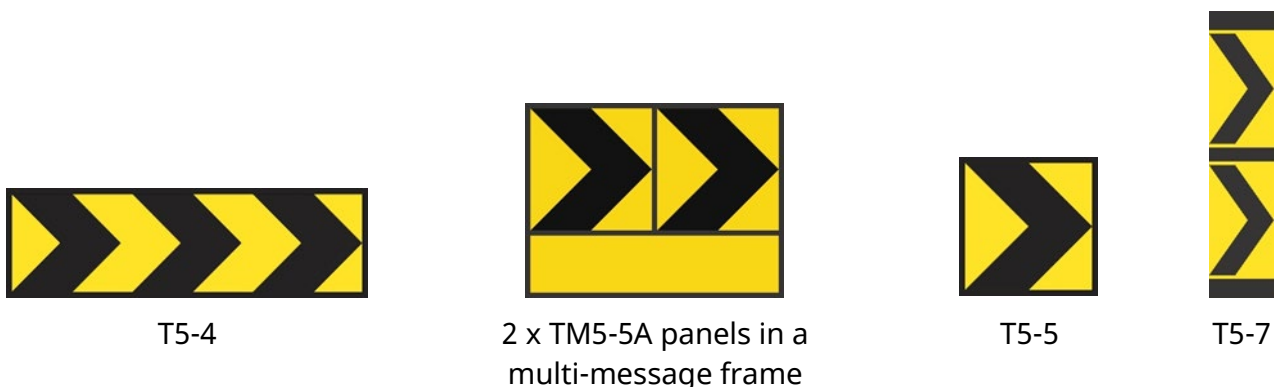

## 5.4.4 Shuttle flow

### Difference

Replace the entire Section 5.4.4 with the following:

This method is typically used when a portion of the roadway is closed so that a single lane is used alternately by traffic travelling in opposite directions. It is one-way flow with one direction first, then the other.

When using shuttle flow, the following are requirements and recommendations:

- Lane widths must be in accordance with Table 2.5. For further guidance on lane widths, see Section 2.5.8.