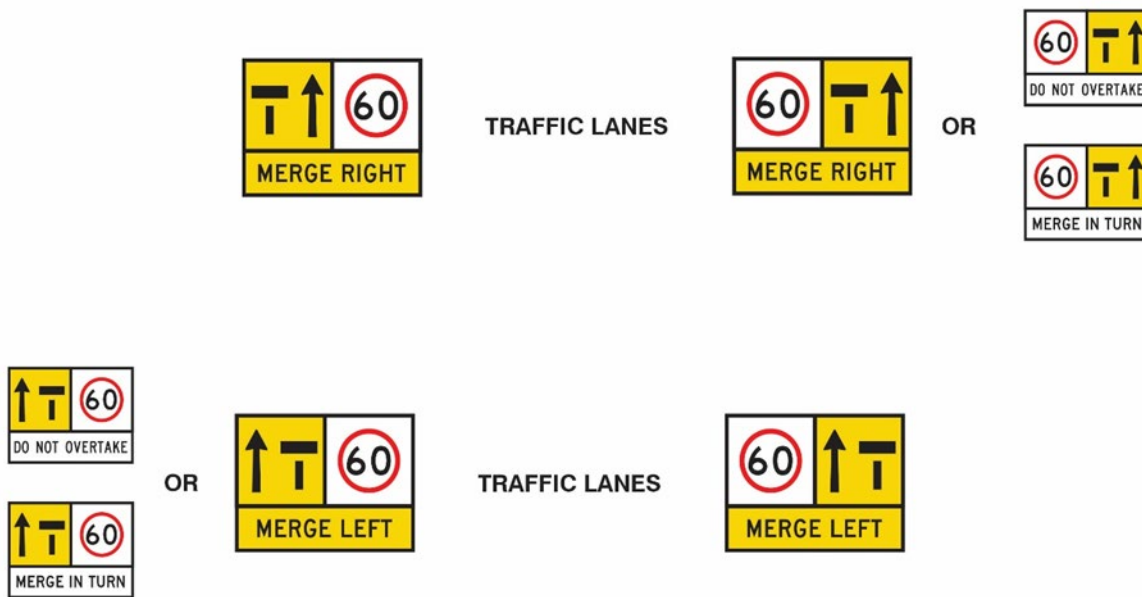


Figure 5.9.1(a) – Lane status signs for merge tapers**Addition**

In subsection '**Multiple tapers**', add the following:

When signing multiple merge tapers, the following lane status sign configuration and location requirements will apply:

- All lane status signs must display the final lane configuration regardless of their location.
- A lane status sign must be located a minimum of a single sign spacing prior to the start of the first merge taper; however, as more than one lane is merging, this spacing may be increased to a distance of two sign spacings (see Section 2.5.3).
- A repeater lane status sign may be installed in the area between the two merge tapers and, if used, should be located a minimum of a single sign spacing prior to the start of the second merge taper.

The following Figure 5.9.1(b) is an example of the lane status sign configuration and location for a road with multiple merge tapers. This Figure does not include all traffic control devices required and is not to be used as a TGS diagram.