


As an example, the standard GROSS LOAD LIMIT (R6-4) sign may be used to apply a weight limitation on any road. It is important where access to a road is restricted that the start and end points of the restriction are identified. In association with using the R6-4 sign at the start of where the weight limit applies, an END (R7-4) plate is used with the R6-4 sign to indicate where the weight limitation ends. The same arrangements are possible in a multi-message sign, see Figure A.4.1.

Figure A.4.1 – Example signs for restricting access on a road

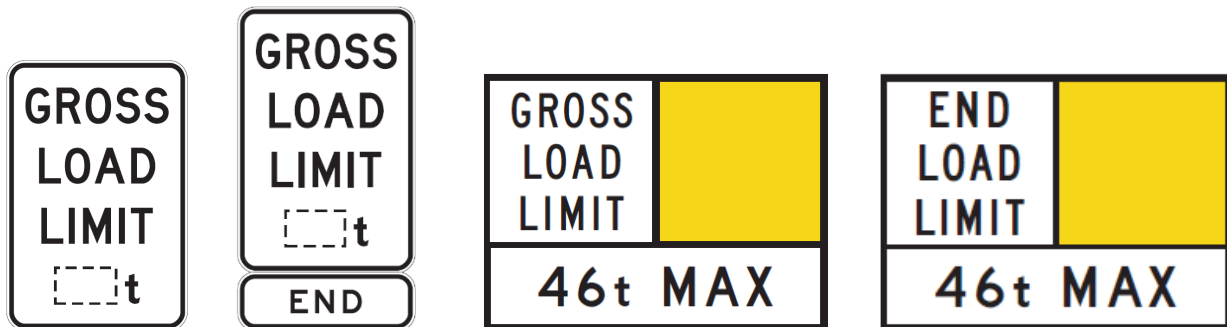

A.5 Warning of a road closure ahead

New

Advanced warning of a road closure ahead should be provided. Warning signs (see Figure A.5.1 and A.5.2) may be installed at the start of the road section and may be some distance from actual closure point. They should be installed at decision points, where areas exist to turn around the longest vehicles using that stretch of road or where alternative routes are available.

Special arrangements for local traffic to access their properties may need to be considered and the signs adjusted accordingly. Where local traffic is provided access, the ROAD CLOSED signs should be located where the road is closed to all traffic and the ROAD CLOSED AHEAD sign used at the point where only locals should be permitted to travel past.

Where speed limits on approach to a road closure are greater than 60km/h, a 60km/h temporary speed limit must be implemented 300 to 500m in advance of the closure point.

A PREPARE TO STOP message may be used 300 to 500m in advance of the closure point.