


Figure 2.2(b) – Sign or hazard greater than or equal to 200 m from a speed zone change

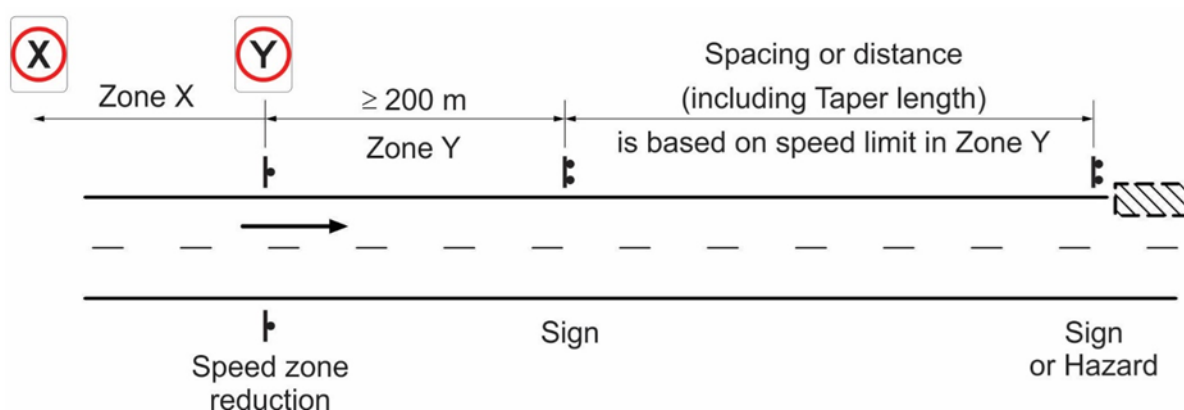

Where site restrictions prevent the placing of required signs (e.g. local topography, median barriers, bridges) the following should be considered:

- moving signs away from the site restriction and installing additional signs
- using smaller signs, subject to the approval of the relevant authority
- using median barrier brackets to support signs, subject to the approval of the relevant authority.

Where a physical constraint on site impacts locating the sign(s) as per the spacing requirements in Table 2.2 and it is supported by a risk assessment, the TMD may increase this spacing requirement (up to a total maximum spacing of three times the spacing in Table 2.2) to suit the site conditions without requiring an RPEQ sign off.

A TMD may apply tolerances (see AGTTM Part 6 Section 6.8) to the spacing requirements for signs and devices when preparing the design of a TGS.

See Figure 2.5.3(a) for the tolerances that apply to a sign spacing.

If a TMD applies a tolerance, which is either the minimum or maximum allowable (as per the above or AGTTM Part 6 Section 6.8), or is so close to the maximum or minimum such that a TMI also applying the maximum tolerance as per AGTTM Part 6 Section 6.8 on site may exceed the total allowable tolerance, or uses the provisions above to increase the spacing, the TMD must specify this distance as either a minimum or maximum (or provide the maximum or minimum value) on the TGS so that a tolerance is not also applied on site by the TMI which would then exceed any applicable limits.