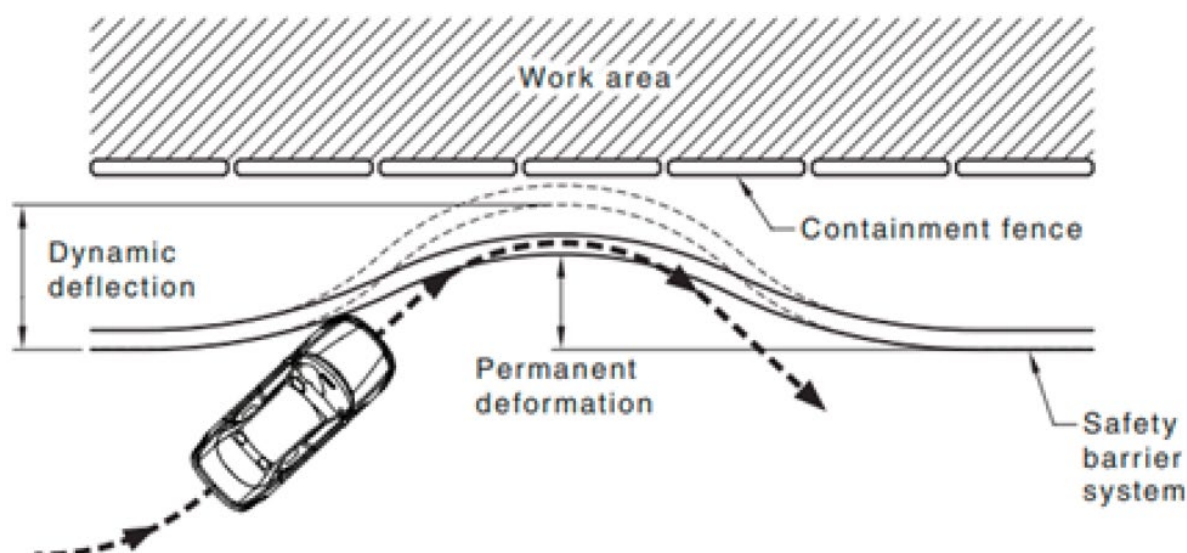


Table 5.1 – Road safety barrier system clearance to traffic lane

Speed (km/h)	Recommended minimum Distance (m)*
≤ 40	0.3
41–60	0.5
61–80	0.5
> 80	1

*Clearance is measured in front of the barrier system and not behind the barrier system in the deflection zone.

Figure 5.4 illustrates an example of dynamic deflection. Clearance in Table 5.1 is measured in front of the barrier system and not behind the barrier system in the deflection zone. This example does not include all traffic control devices required and is not to be used as a TGS diagram.

Figure 5.4: Dynamic deflection and protective fencing behind a safety barrier system

For additional guidance on road safety barriers in Queensland, see the [Road Planning and Design Manual Edition 2: Volume 3, Supplement to Austroads Guide to Road Design Part 6: Roadside Design, Safety and Barriers](#), with Section 6.8 of this document detailing the requirements for temporary road safety barriers.

Only road safety barriers included on the current list of products in the Transport and Main Roads [Accepted Road Safety Barrier Systems and Devices](#) document must be used at roadwork sites in Queensland.