

EMERGENCY ONLY

NOTES

- TOLERANCES:**
POSITION OF SIGNS:
MINIMUM 10% LESS THAN THE DISTANCE OR LENGTHS GIVEN.
MAXIMUM 25% MORE THAN THE DISTANCES OR LENGTHS GIVEN.
SPACING OF DELINEATING DEVICES:
MAXIMUM 10% MORE THAN THE SPACING GIVEN.
NO MINIMUM.
- AGTTM PART 6 SECTION 6.8.**
DOCUMENTATION
ON-SITE VARIATIONS MUST BE APPROVED BY THE TRAFFIC MANAGEMENT SUPERVISOR, THAN AN ON-SITE VARIATION MADE AND CHANGES RECORDED IN THE DAILY DAIRY. FOR MORE INFORMATION REFER TO SECTION 9.3 OF THE TMP.
1. PLAN TO BE USED FOR EMERGENCY WORKS ONLY.
 2. ONE TM VEHICLE WILL BE REQUIRED FOR EVERY CLOSURE POINT AROUND EMERGENCY.
 3. THIS PLAN MAY BE USED IN CONJUNCTION WITH OTHER EMERGENCY PLANS TO FORM A SAFE BARRIER AROUND THE HAZARD.

TABLES

SIGN SPACING

AGTTM PART 3 - TABLE 2.2

SPEED LIMIT (km/h)	DISTANCE ('D') (m)
55 OR LESS	15
56 TO 65	45
GREATER THAN 65	EQUAL TO SPEED OF TRAFFIC IN km/h

LEGEND

- EXISTING ROAD
PROPOSED CONES
HAZARD




METROPOLITAN REGIONS
TRAFFIC MANAGEMENT BRANCH
WATERLOO CRESCENT
TELEPHONE (08) 138 138
EAST PERTH 6004


DATE OF DRAWING 2025 JULY	SCALE -
STRAIGHT LINE KILOMETERS (SLK) -	POSTED SPEED -
ROAD AUTHORITY MRWA	WORKSITE SPEED -
CHECKED BY TYLER HARTLEY	SIGNATURE <i>Tyler Hartley</i>
ACCREDITATION RTM-0066	
DESIGNED BY MICHAEL REED	SIGNATURE <i>Michael Reed</i>
ACCREDITATION AWTM-23-11536-02	
GENERIC TRAFFIC GUIDANCE SCHEME EMERGENCY WORK SCENARIOS MINOR 4-WAY INTERSECTION PRE-CLOSURE POINT	
DRAWING NO 0922-01531-EW-014	REVISION 6

THESE SIGNS MAY BE SWITCHED TO REDUCE THE DISTANCE OF THE SPEED ZONE TO THE HAZARD


SYMBOLIC HAZARD SIGN TO BE SELECTED DEPENDING ON TYPE OF HAZARD

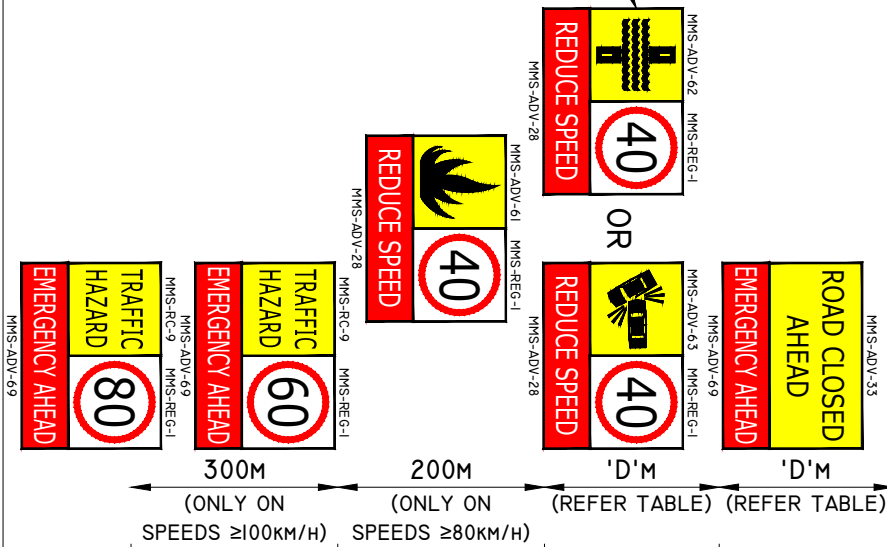


THESE SIGNS MAY BE SWITCHED TO REDUCE THE DISTANCE OF THE SPEED ZONE TO THE HAZARD

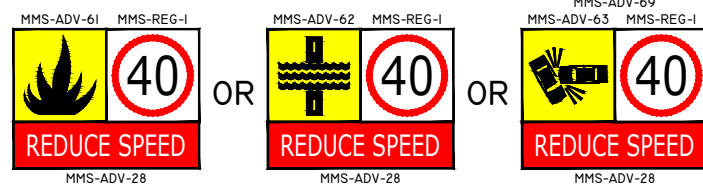

SYMBOLIC HAZARD SIGN TO BE SELECTED DEPENDING ON TYPE OF HAZARD

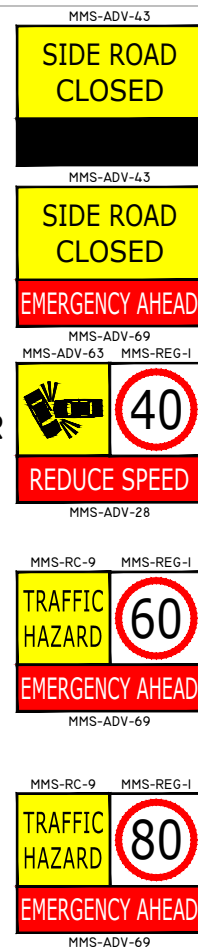

THESE SIGNS MAY BE SWITCHED TO REDUCE THE DISTANCE OF THE SPEED ZONE TO THE HAZARD

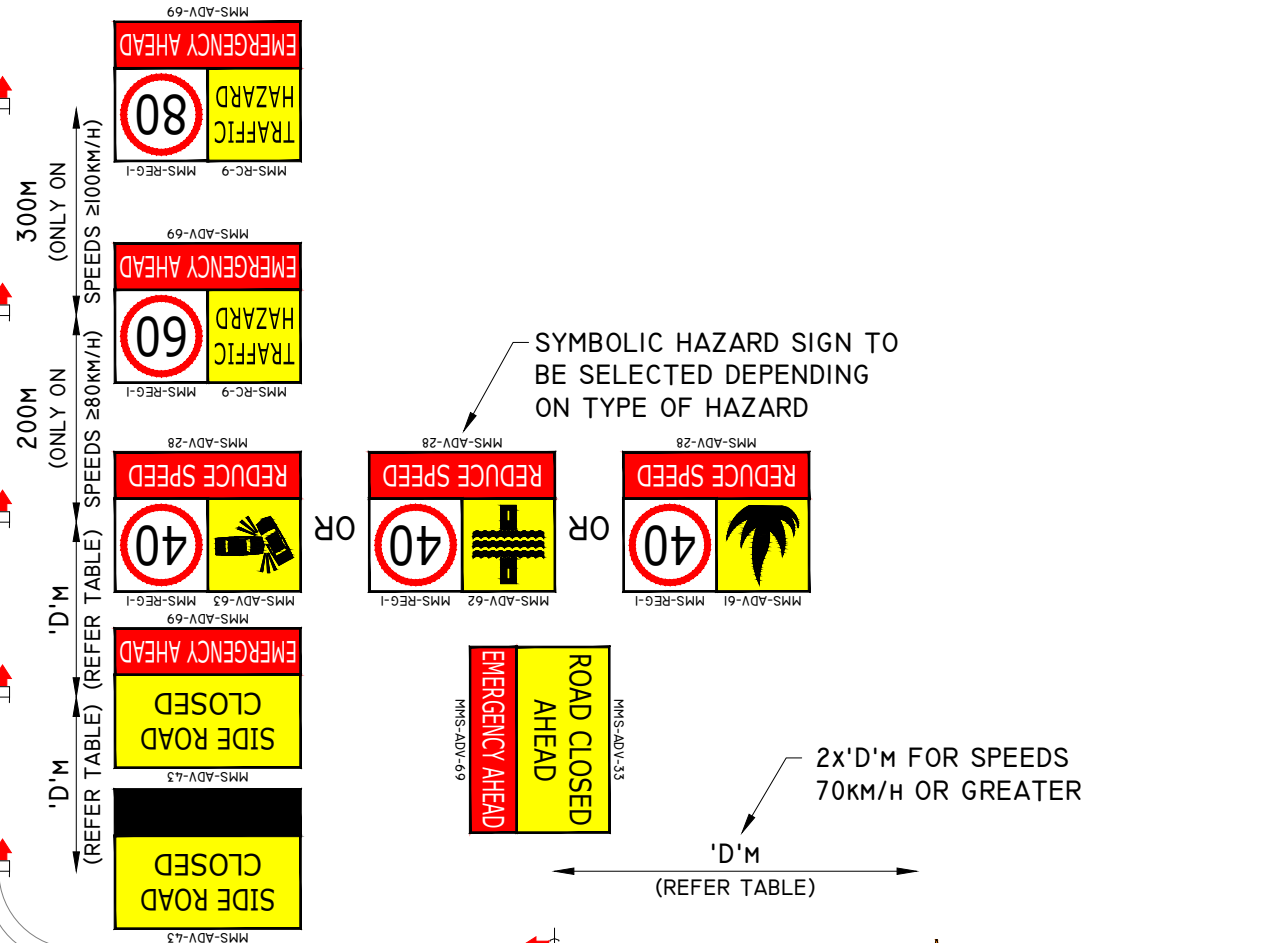

2x'D'M FOR SPEEDS 70km/h OR GREATER

'D'M' (REFER TABLE)

EMERGENCY ONLY