

Where traffic speed is substantially different (± 10 km/h or more) to the posted or temporary speed zone values, refer to Section 2.5.9 for the speed value to use in the tables.

Figure 2.2(a) – Sign or hazard within 200 m of a speed zone change


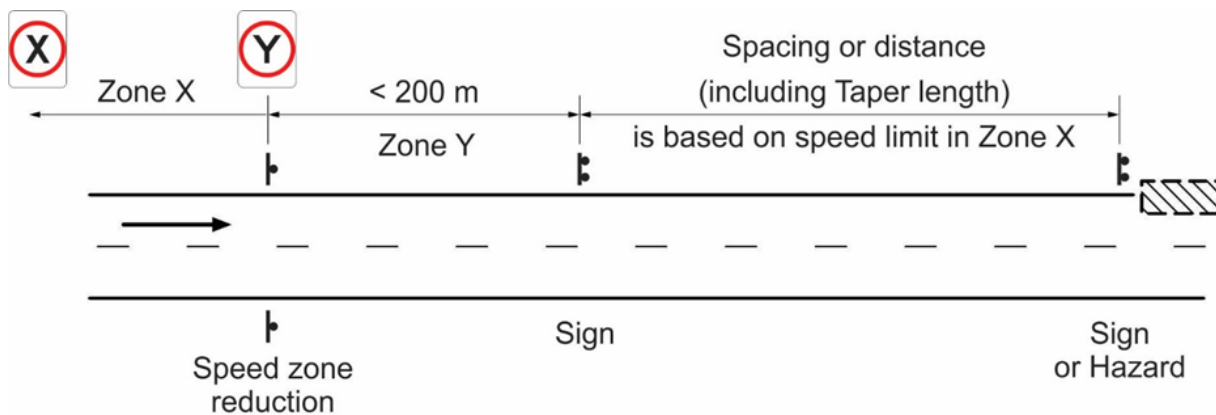


Figure 2.2(b) – Sign or hazard greater than or equal to 200 m from a speed zone change

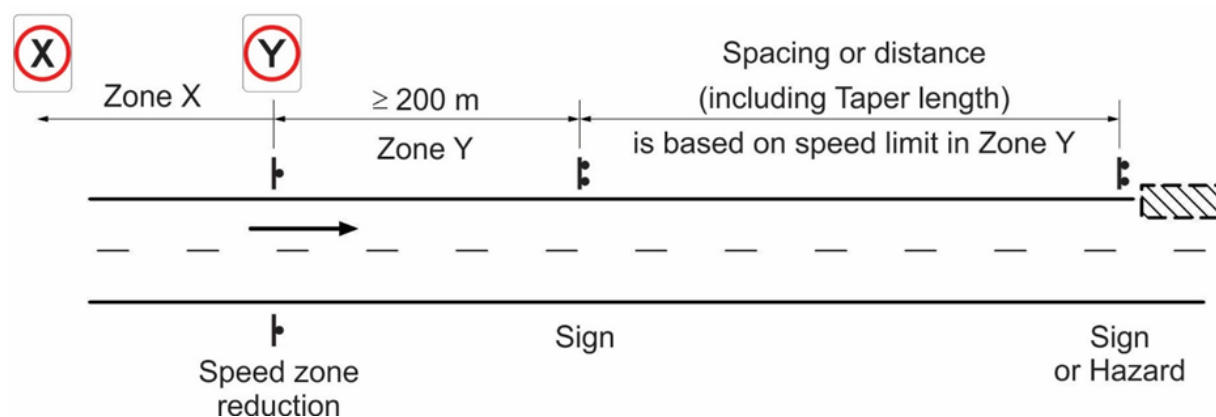

Where site restrictions prevent the placing of required signs (e.g. local topography, median barriers, bridges) the following should be considered:

- moving signs away from the site restriction and installing additional signs
- using smaller signs, subject to the approval of the relevant authority, and
- using median barrier brackets to support signs, subject to the approval of the relevant authority.

Where a physical constraint on site impacts locating the sign(s) as per the spacing requirements in Table 2.2 and it is supported by a risk assessment, the TMD may increase this spacing requirement (up to a total maximum spacing of three times the spacing in Table 2.2) to suit the site conditions without requiring an RPEQ sign off.