

On roads with a permanent speed limit (prior to any reductions for the works) of less than or equal to 80 km/h, the safety buffer may be omitted where the works (including the work area, all workers, vehicles, equipment and materials) are at least 6 m clear of traffic and is supported by a risk assessment.

Figure 3.6(a) – Safety buffer for T-intersection

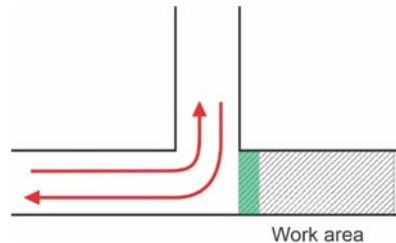


Figure 3.6(b) – Safety buffer for cross intersection

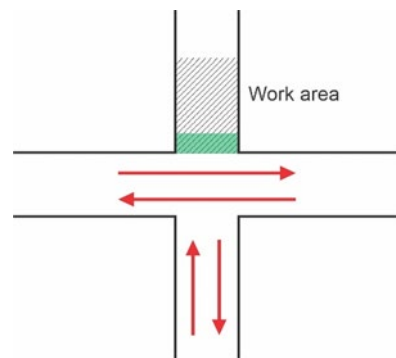


Figure 3.6(c) – Safety buffer for roundabout


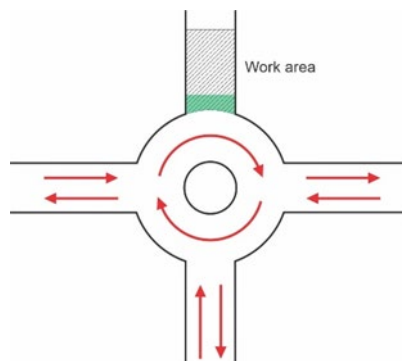


Figure 3.6(d) – Safety buffer for terminating leg of T-intersection

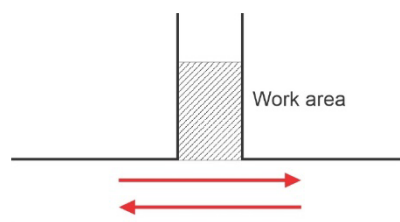

Note: For works areas that extend close to the traffic lanes of the continuing leg of the T-intersection, 'past' methods of control (see Section 5) may be more appropriate.