

3. If a five-minute count is not possible, and AADT values with hourly breakdowns are not available, use AADT values and percentage heavy vehicle data. To estimate the five-minute count, firstly divide the AADT by a factor of 10 (to get an estimated hourly count) and then divide this by 12 to get an estimated five-minute value. Divide this by two if the AADT is for a two-way road. Use the percentage heavy vehicles information with this value to estimate the number of heavy vehicles for this five-minute period.

AADT information for state-controlled roads can be located on the [Queensland Open Data Portal – Traffic Census data](#).

The duplication of the advance warning signs for a traffic control station as indicated in Figures 4.4, 4.5 and 4.6 below is not a specific requirement. Signs are to be duplicated in accordance with the requirements in Section 2.5.3 and Section 5.5.1 for speed signs.

Figure 4.4 illustrates an example of sign positioning for queues as per the steps above for a speed of 60 km/h where the PREPARE TO STOP sign is less than or equal to 240 m away from the PTC/traffic controller. This diagram is not an example of how to install all traffic control devices and is not to be used as a TGS diagram.

Figure 4.4: Avoiding end of queue collisions (≤ 240 m)

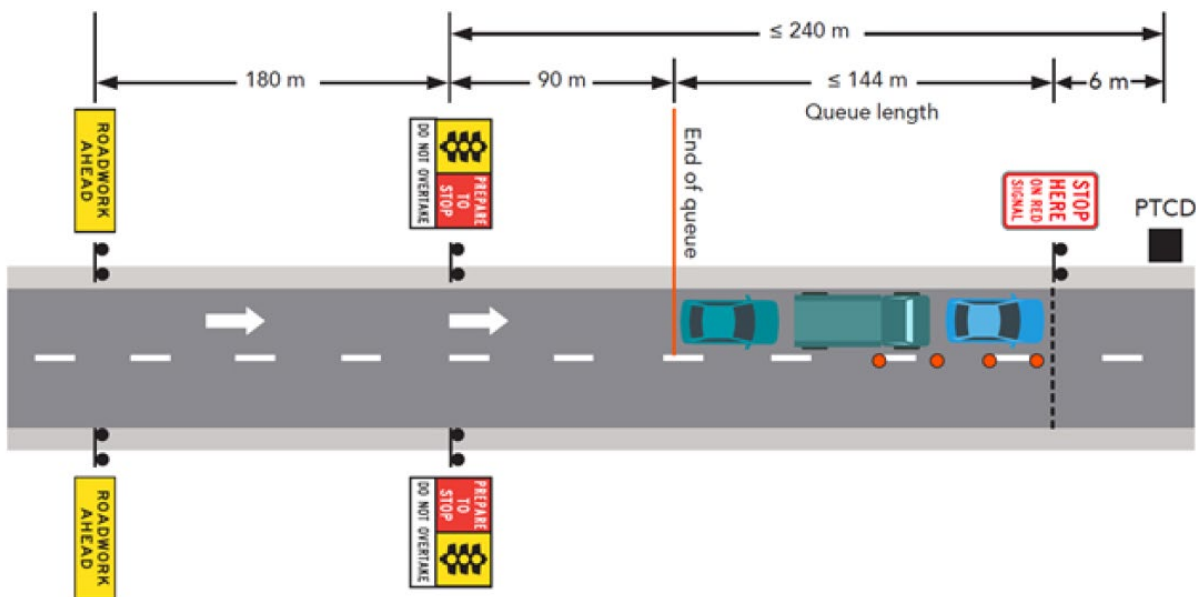


Figure 4.5 illustrates an example of sign positioning for queues as per steps above for a speed of 60 km/h where the primary PREPARE TO STOP sign is more than 240 m, but less than or equal to 300 m away from the PTCD/traffic controller. This diagram is not an example of how to install all traffic control devices and is not to be used as a TGS diagram.