


Figure 5.5.1 illustrates an example of a speed reduction arrangement for road worker safety on a 60 km/h road where road workers will be working within 1.2 m of the traffic lane and the speed past the workers is to be reduced to 40 km/h. The distance in advance of the workers for the start of the 40 km/h reduced speed zone is based on appropriate sign spacing in Table 2.2. As this spacing is within 200 m of a speed limit change (to 40 km/h), the speed value to use in Table 2.2 is 60 km/h which equates to a distance of 45 m. This Figure does not include all traffic control devices required and is not to be used as a TGS diagram.

Figure 5.5.1 – Speed limit sign location for road worker safety

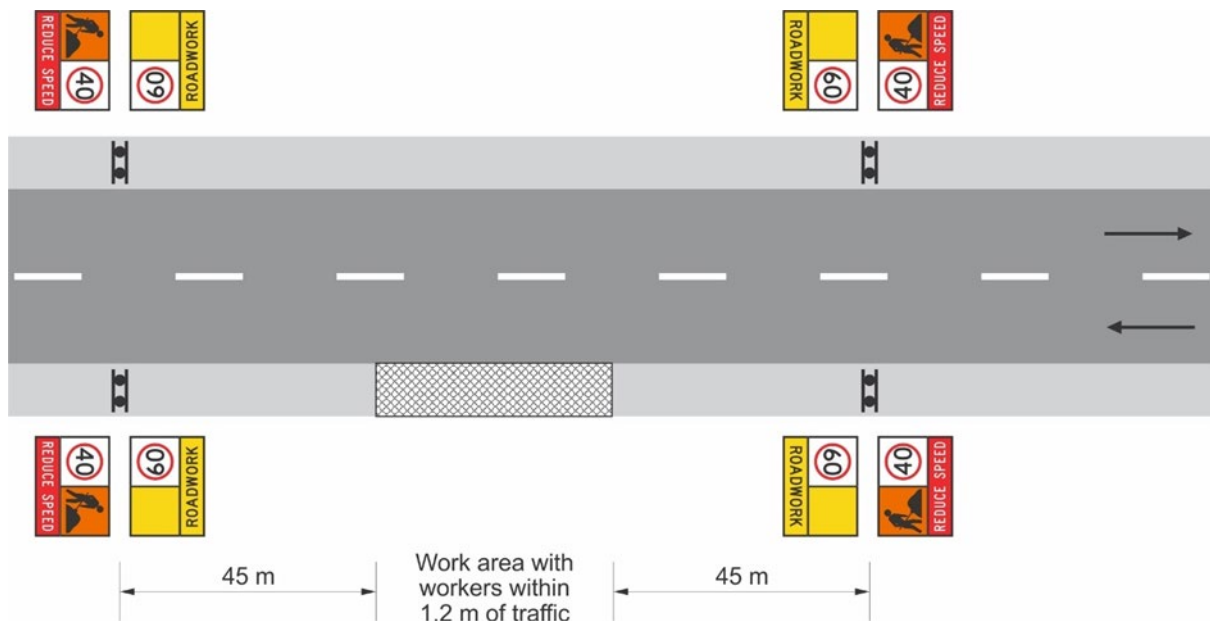

Selecting the speed limit

Selecting the temporary speed limit at works is dependent on workplace safety and traffic safety requirements. Temporary speed limits are a viable option for any of the following examples:

- shuttle flow
- contraflow
- temporary stopping
- temporary traffic signals and PTCD
- the number of lanes is reduced
- merges
- narrow lanes
- protecting traffic controllers