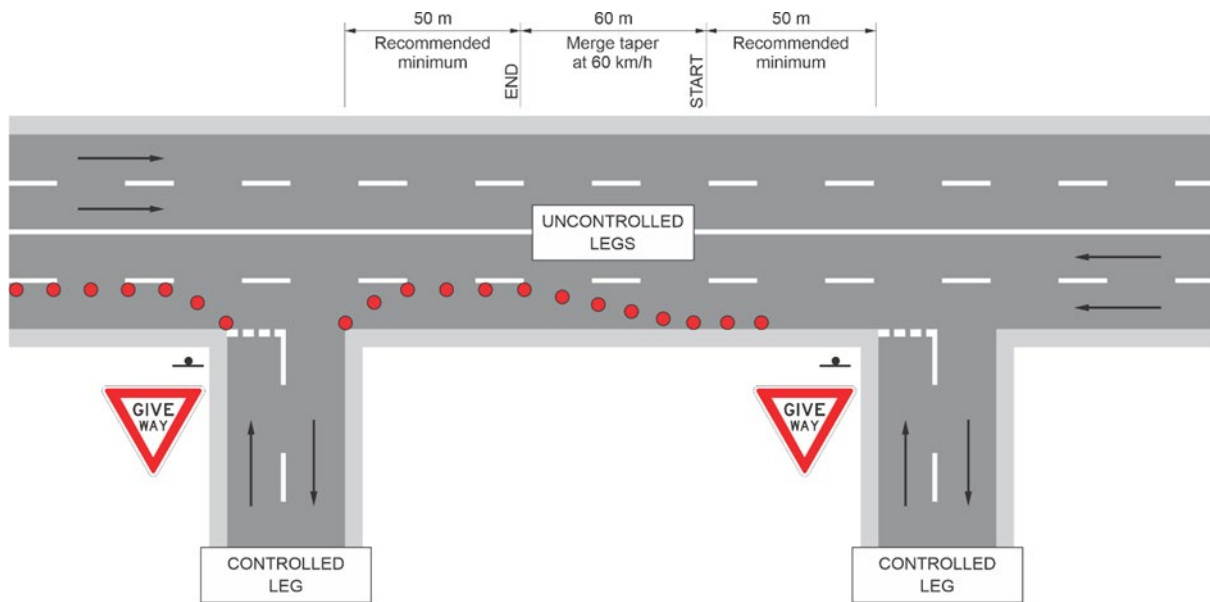


Figure 5.9.1(c) – Controlled and uncontrolled legs on a multi-lane road

5.9.2 Chicanes

Addition

A chicane is also a useful treatment when using shuttle flow traffic control to ensure vehicles return to the correct side of the road and should be implemented when the site is unattended.

Figure 5.9.2 illustrates an example of a chicane used with shuttle flow and signal traffic control on a road with a 60 km/h speed limit. This diagram does not include all traffic control devices required and is not to be used as a TGS diagram.