


Figure 2.5: Station set up and positioning guide

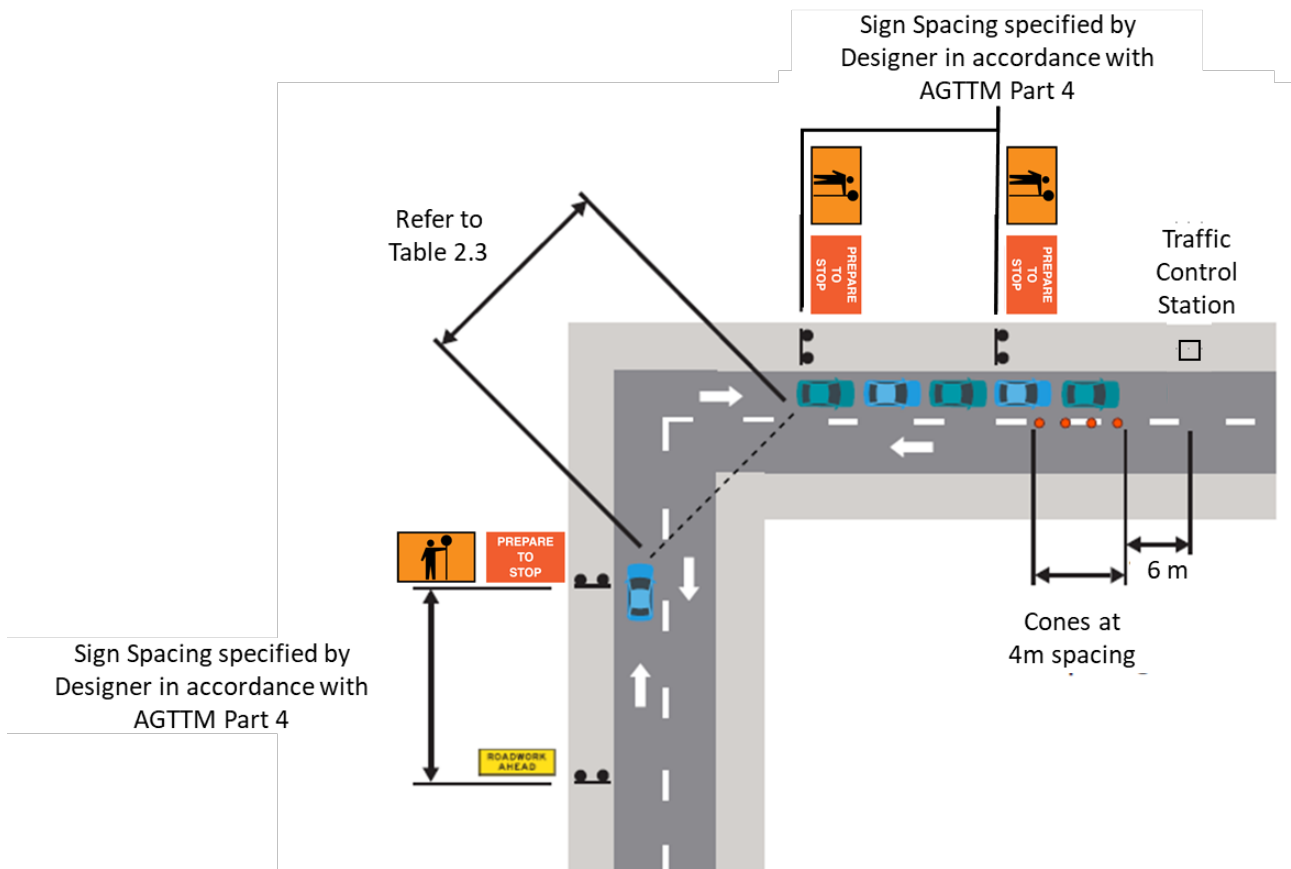

Notes:

- Signs shown on one side of the road are to be duplicated on the other side of the road
- Not all advance warning signs are shown
- For speeds less than 45 km/h sign spacing is 15 m, for speeds greater than 45 km/h refer to Table 2.3

2.7.4 Sight distance and sign location

Traffic controllers should stand and place signs in locations with as much as sight distance as practicable. Consideration of suitable sight distances will enable road users enough time to perceive and react to a hazardous situation on the road ahead resulting in safe and efficient traffic management. Sight distances are best when designed to be as long as practicable, but are often restricted by the following:

- curves in road
- crests in road
- obstructions (e.g. safety fences, boundary fences, barriers, parked cars, street furniture, landscaping, signs)
- railway crossings
- bridges
- traffic queues
- weather (e.g. linemarking visibility in the rain, fog, smoke, dust)
- time of day (e.g. night visibility, glare)
- sealed or unsealed roads
- type of road users at the site (e.g. over-dimensional vehicles, motorcyclists)
- other local site features.