

Replace:

- A clearance between the road safety barrier system and the edge of the nearest traffic lane must be provided as shown in Table 5.1. These clearances are a recommendation only. There are no minimum clearances for permanent road safety barriers so the minimum for temporary systems if equally rated should be the same. Consider that road users often increase their travel speed during times the worksite is unattended.


with:

- A clearance between road safety barriers and traffic should be provided. The recommended minimum clearance between the road safety barrier system and the edge of the nearest traffic lane is shown in Table 5.1. When determining the appropriate speed to select in Table 5.1, consider the range of speed limits and vehicle speeds that may occur while the safety barrier is in place and the likelihood that road users often increase their travel speed during times the worksite is unattended.

For further guidance regarding road safety barrier systems, see Austroads Guide to Road Design Part 6.

Figure 5.3 illustrates an example of safety barrier placement around the work area. This diagram does not include all traffic control devices required and is not to be used as a TGS diagram.

Figure 5.3: Safety barrier protection of work area

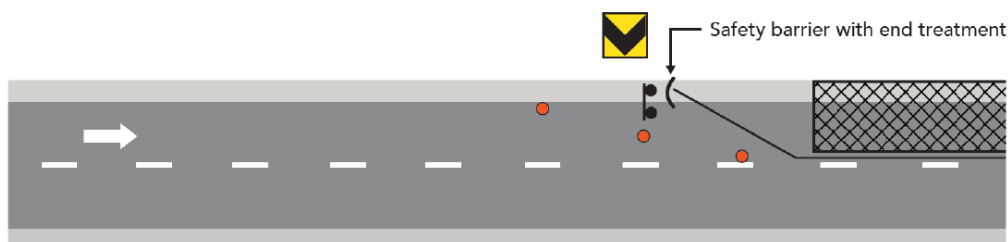

Replace Table 5.1 with the following: