

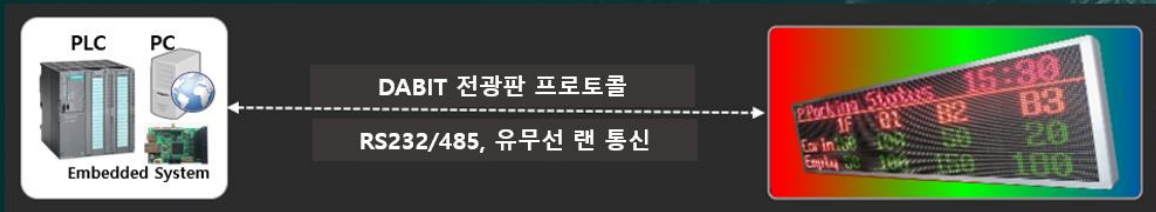


PLC, PC, 임베디드 시스템 연동 **LED** 전광판 솔루션!!

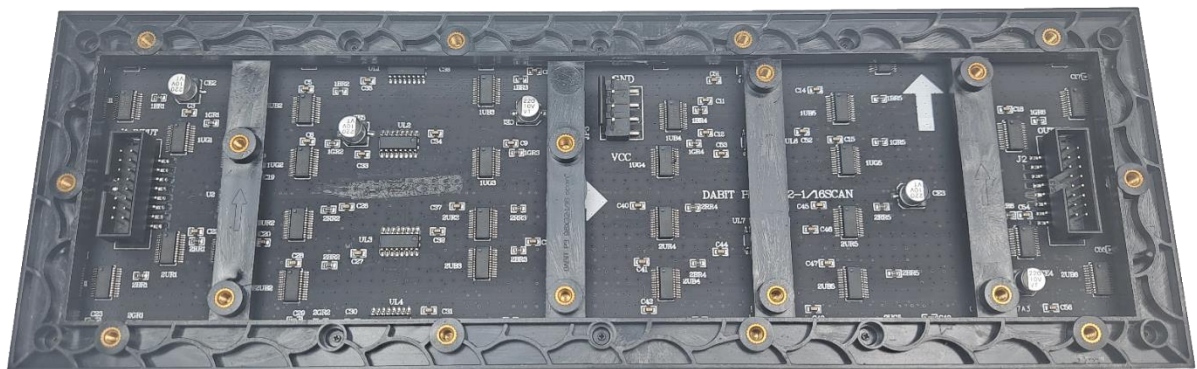

LED Module Specification

(DABIT P3_96x32_16S_2700nits, 고휘도/고품질/저전력)

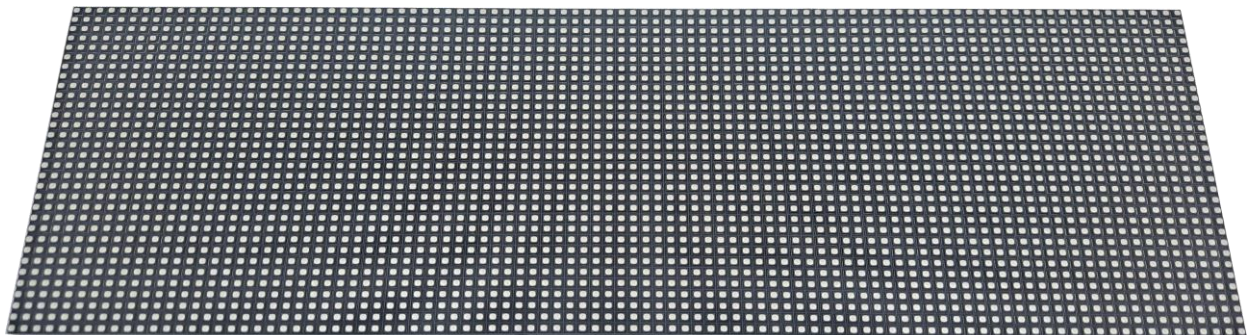

1. PIXEL/MODULE Specification

Item	Parameter
Pixel Pitch	3(mm)
Pixel Configuration	1R1G1B / R : G : B=3 : 6 : 1
LED Lamp	Full color
Module Size(W×H×D)	288×96×13(mm)
Module Pixel	96 x 32 = 3,072dot
Module Weight	240(g)
Module Power	Max. 18W
Module Electric Current	Max. 2.6A
Drive Voltage	DC5V

2. Screen Parameter

Item	Parameter
Brightness	≥2700cd/m²
View Angle	≥140° (Vertical)
	≥140° (Horizontal)
Best View Distance	3 ~ 9m
Scan Mode	1/16 Scan
Drive IC	MBI5124
Screen Lifespan	>100,000 (Hrs)
Drive Mode	1/16 Duty Drive

3. Environment Condition

Use the environment	Semi indoor
Operating temperature	-20~65℃
Operating humidity	10%~90% RH
Storage temperature	0~40℃

4. Signal Function

Pin Number	Pin Name	Finction Description
1, 5	G1, G2	Data Input For Green Color
2, 6	B1, B2	Data Input For Blue Color
3, 7	R1, R2	Data Input For Red Color
9, 10, 11, 12	A[0:3]	Line Address
13	CLK	Shift Clock For Input Data
14	LATCH	Data Strobe
15	OE	Out Enable
4, 8, 16	GND	Ground

5. Connector Cable Specification

Data Cable: 16Pin Flat Cable



6. Dimention(288 x 98 x 13mm)

