





Industrial LED Display Solution for PLC, PC, Embedded system



[PLC, PC, 임베디드 시스템 연동 LED 전광판 솔루션]

LED Module

(P4 Outdoor, 64x32 dots, 256x128mm, 1/8scan)

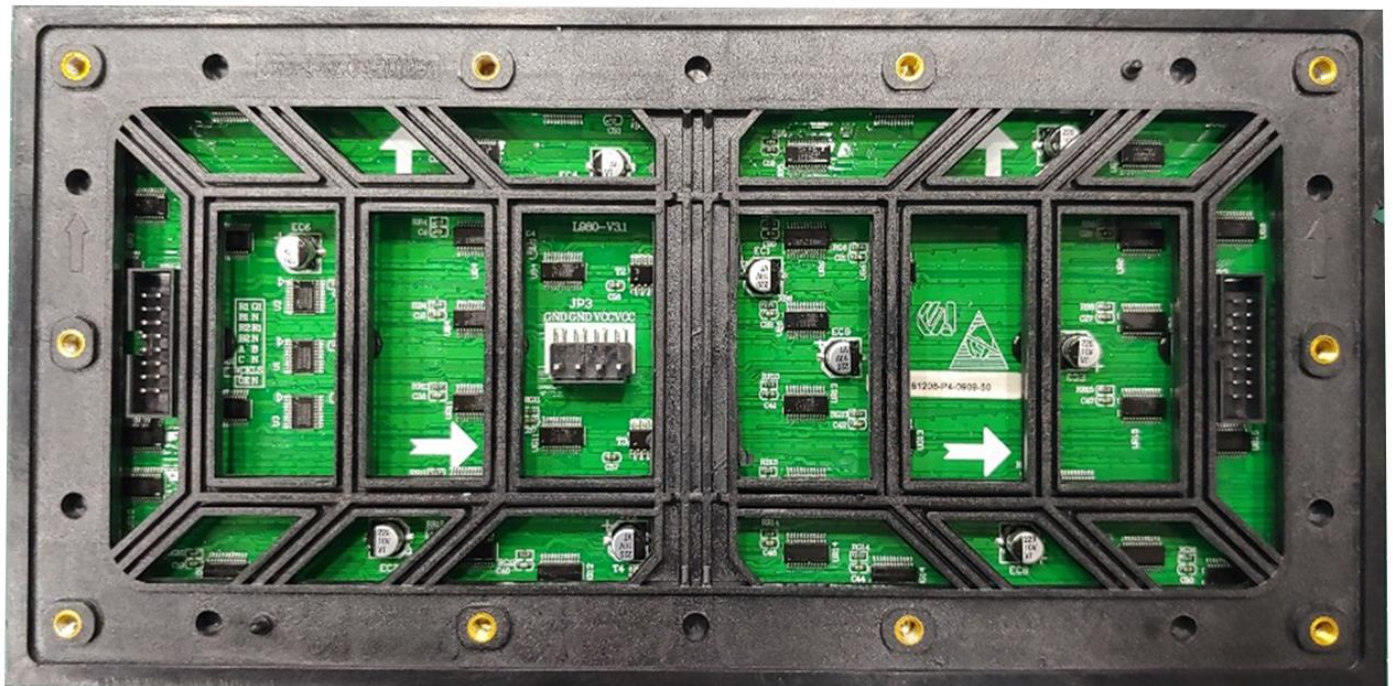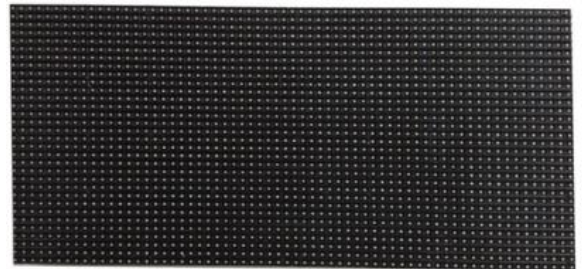

1. PIXEL/MODULE Specification

Item	Parameter
Pixel Pitch	4(mm)
Pixel Configuration	1R1G1B / R : G : B=3 : 6 : 1
LED Lamp	Full color
Module Size(WxH)	256 × 128 (mm)
Module Pixel	64 x 32
Module Power (w)	Max. 40W
Drive Valtage	DC 4.6 ~ 5.5V

2. Screen Parameter

Item	Parameter
Brightness	≥ 6000 cd/m²
View Angle	≥140° (Vertical)
	≥140° (Horizontal)
Best View Distance	4 ~ 12m
Scan Mode	1/8 Scan
Drive IC	ICN 2018
Screen Lifespan	Max. 100,000 (Hrs)

3. Environment Condition

Use the environment	Outdoor
Working temperature range	-20~60°C
Working humidity range	10%~90% RH
Protection Level	IP65 Waterproof

4. Signal Function


Pin Number	Pin Name	Function Description
1, 5	R1, R2	Data Input For Green Color
2, 6	G1, G2	Data Input For Blue Color
3, 7	B1, B2	Data Input For Red Color
9, 10, 11, 12	A[0:3]	Line Address
13	CLK	Shift Clock For Input Data
14	LATCH	Data Strobe
15	OE	Out Enable
4, 8, 16	GND	Ground

5. Connector Cable Specification

Data Cable: 16Pin Flat Cable



6. Frame Dimention

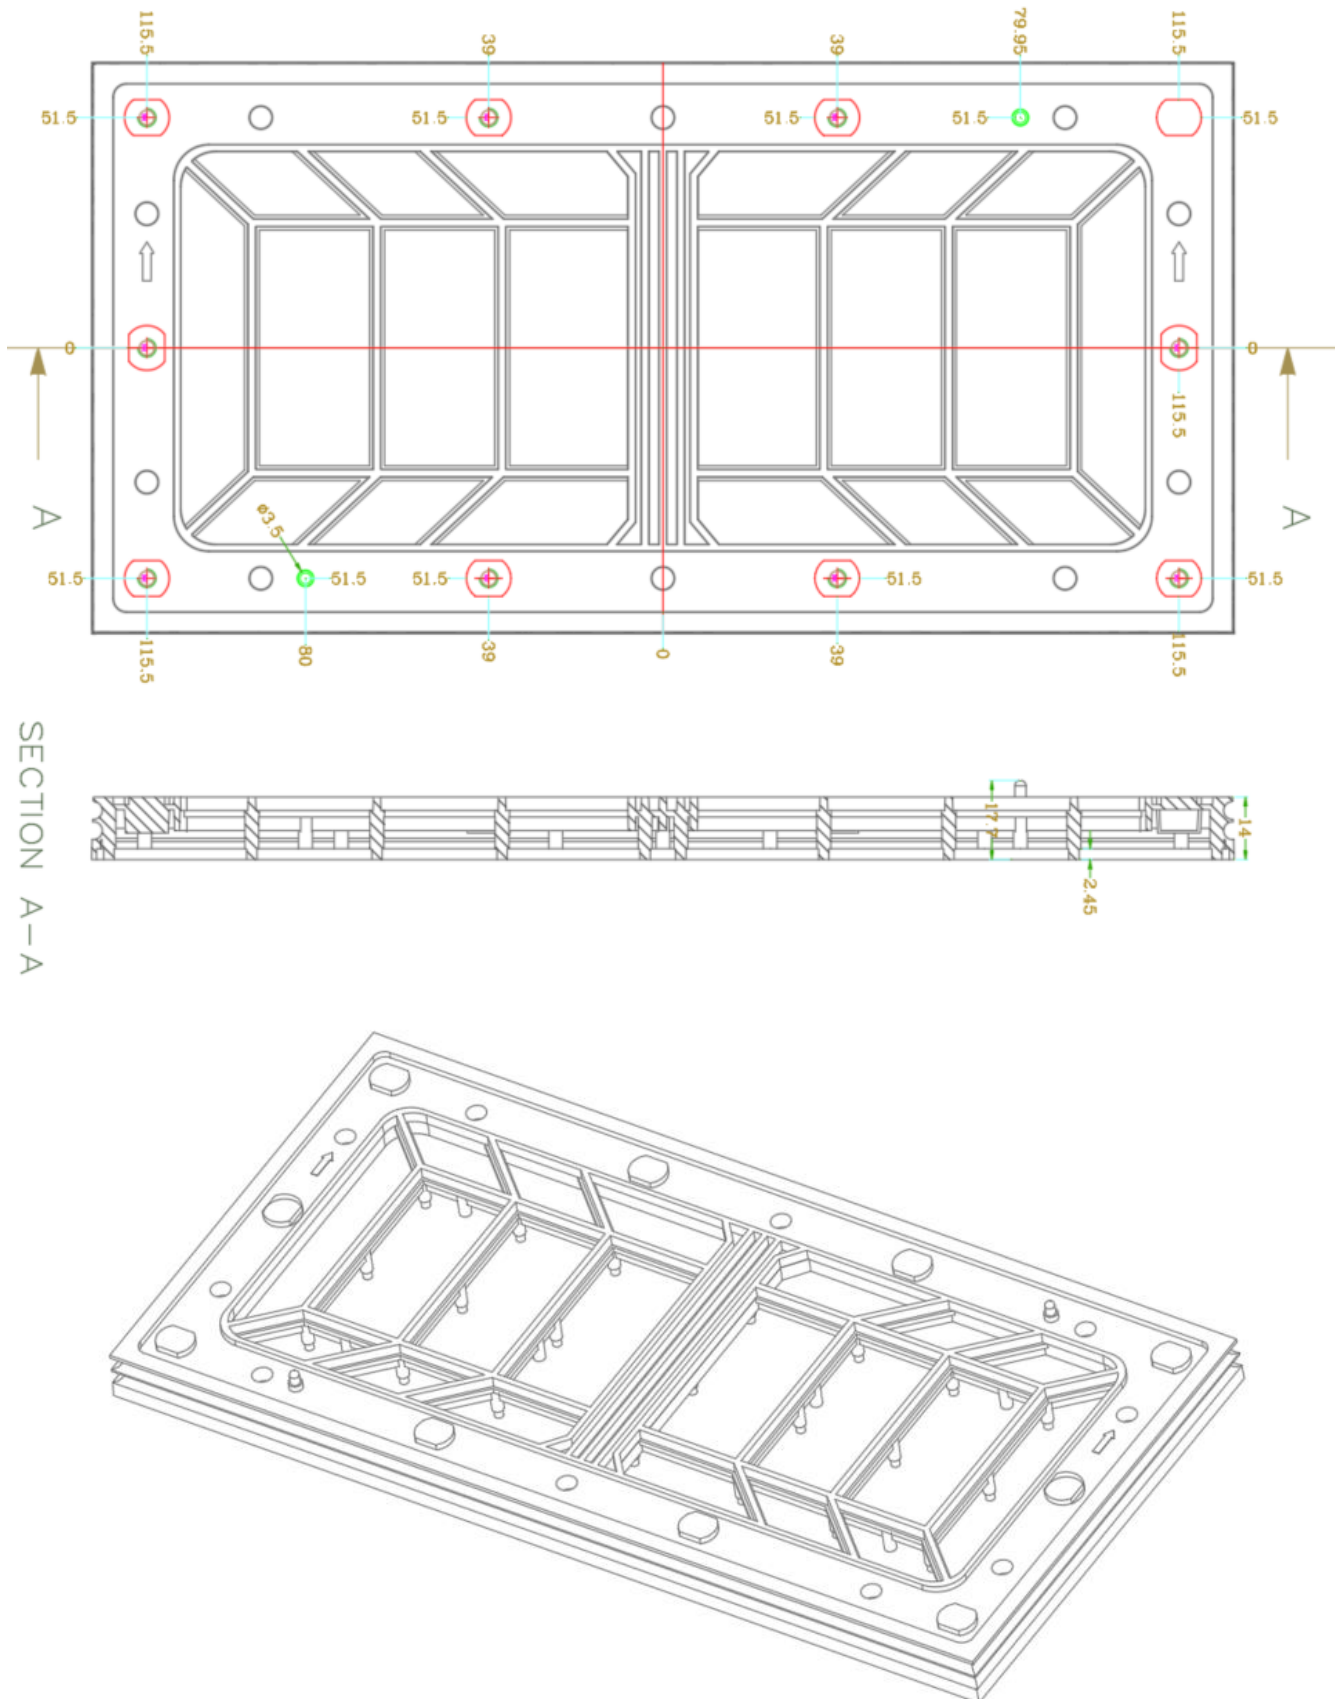

7. Signal Flow (16 x 16 DOT MATRIX, 1/8 duty)

DATA NO.	DATA FLOW
Data 1	1.16 → 1.1 → 2.16 → 2.1..... 8.16→8.1
Data 2	9.16 → 9.1 → 10.16 → 10.1..... 16.16→16.1

