


Industrial LED Display Solution for PLC, PC, Embedded system



[PLC, PC, 임베디드 시스템 연동 LED 전광판 솔루션]

LED 모듈 사양서

(ECO T10 Outdoor, 16x32 dots, 160x320mm, 1/4scan)

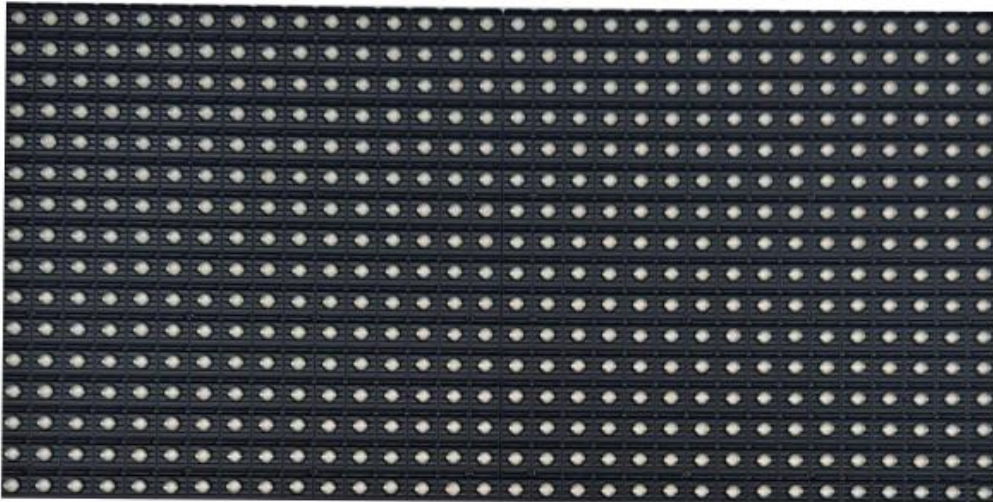

Warranty : 2 Years

1. 기본 사양

Item	Parameter
Pixel Pitch	10 (mm)
Pixel Configuration	1R1G1B / R : G : B=3 : 6 : 1
LED Lamp	Full color
Module Size(H×W)	160 × 320 (mm)
Module Pixel	16 x 32 dots
Module Weight	715(g)
Module Power	25 W
Drive Valtage	DC 4.6 ~ 5.5V

2. 화면 사양

Item	Parameter
Brightness	8000 cd/m ²
View Angle	≥55° (Vertical)
	≥110° (Horizontal)
Best View Distance	10~ 30m
Driving Type	1/4 Scan
LED Lamps	DIP570
Screen Lifespan	Max. 100,000 (Hrs)

3. 사용 조건


Use the environment	Outdoor
Working temperature range	-20~50℃
Storage Temperature	-20~70℃
Working humidity range	10%~90% RH
IP Grade(front)	IP65

4. 핀 맵


Pin Number	Pin Name	Finction Description
1, 5	R1, R2	Data Input For Green Color
2, 6	G1, G2	Data Input For Blue Color
3, 7	B1, B2	Data Input For Red Color
9, 10, 11, 12	A[0:3]	Line Address
13	CLK	Shift Clock For Input Data
14	LATCH	Data Strobe
15	OE	Out Enable
4, 8, 16	GND	Ground


5. 커넥터 규격

Data Cable: 16Pin Flat Cable

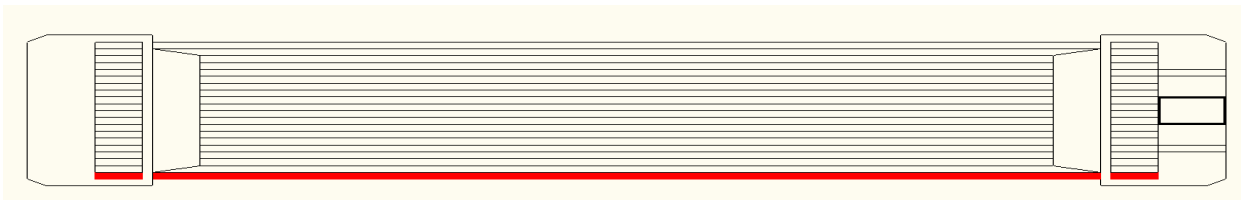

6. 규격

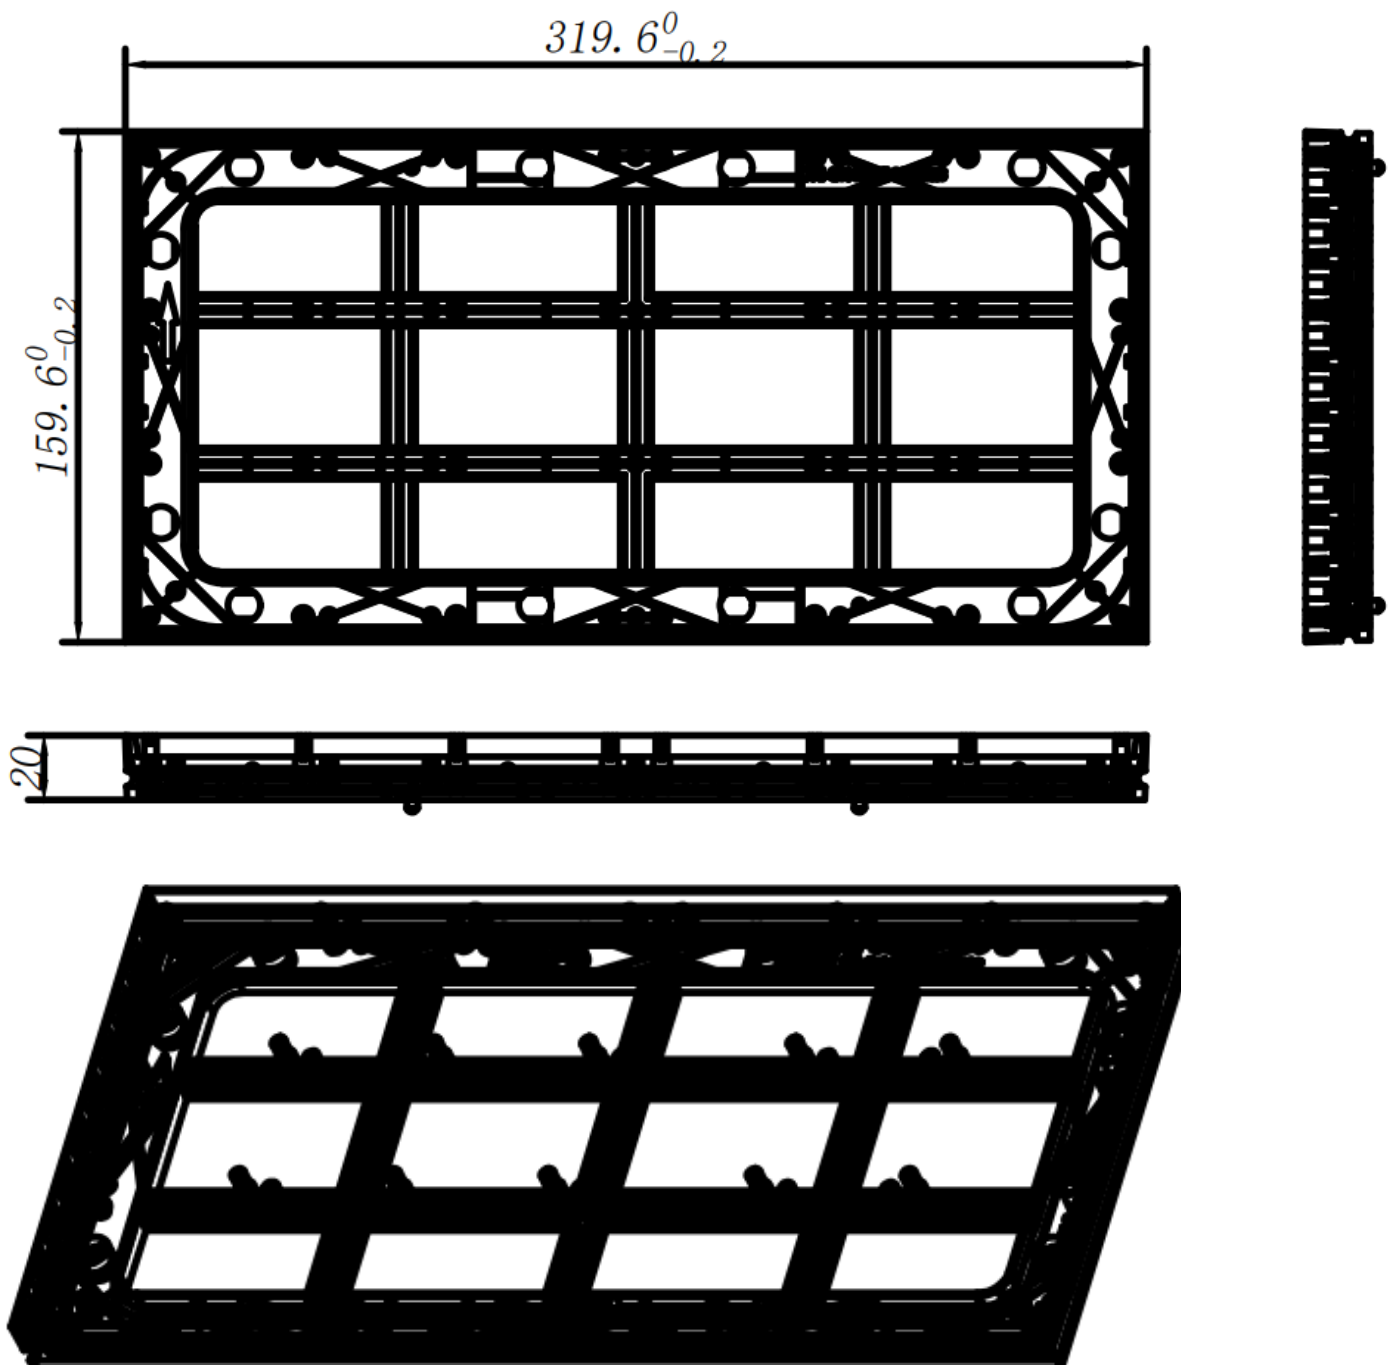

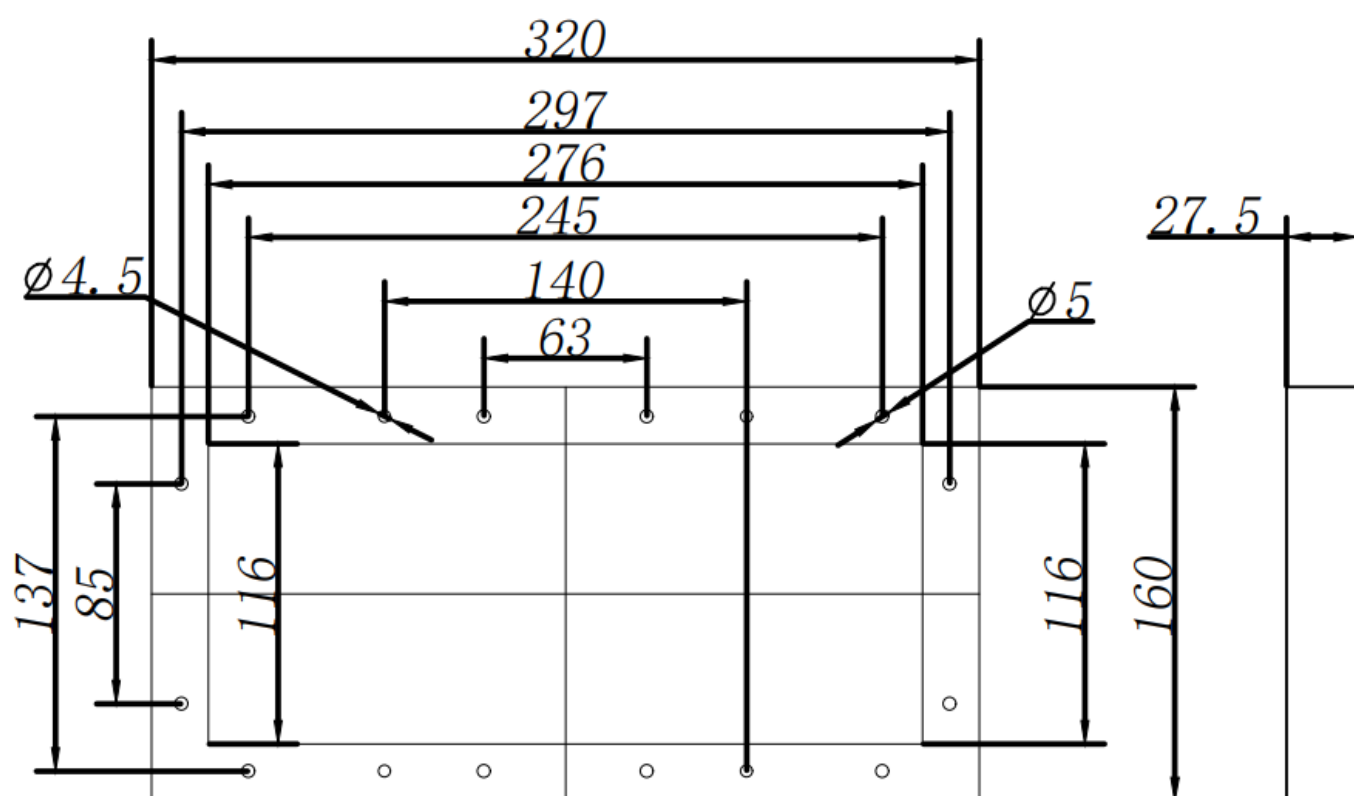

고정 홀: M4 나사산, 12 개