





Industrial LED Display Solution for PLC, PC, Embedded system



[PLC, PC, 임베디드 시스템 연동 LED 전광판 솔루션]

LED Module

(P10 Outdoor, 16x32 dots, 160x320mm, 1/4scan)

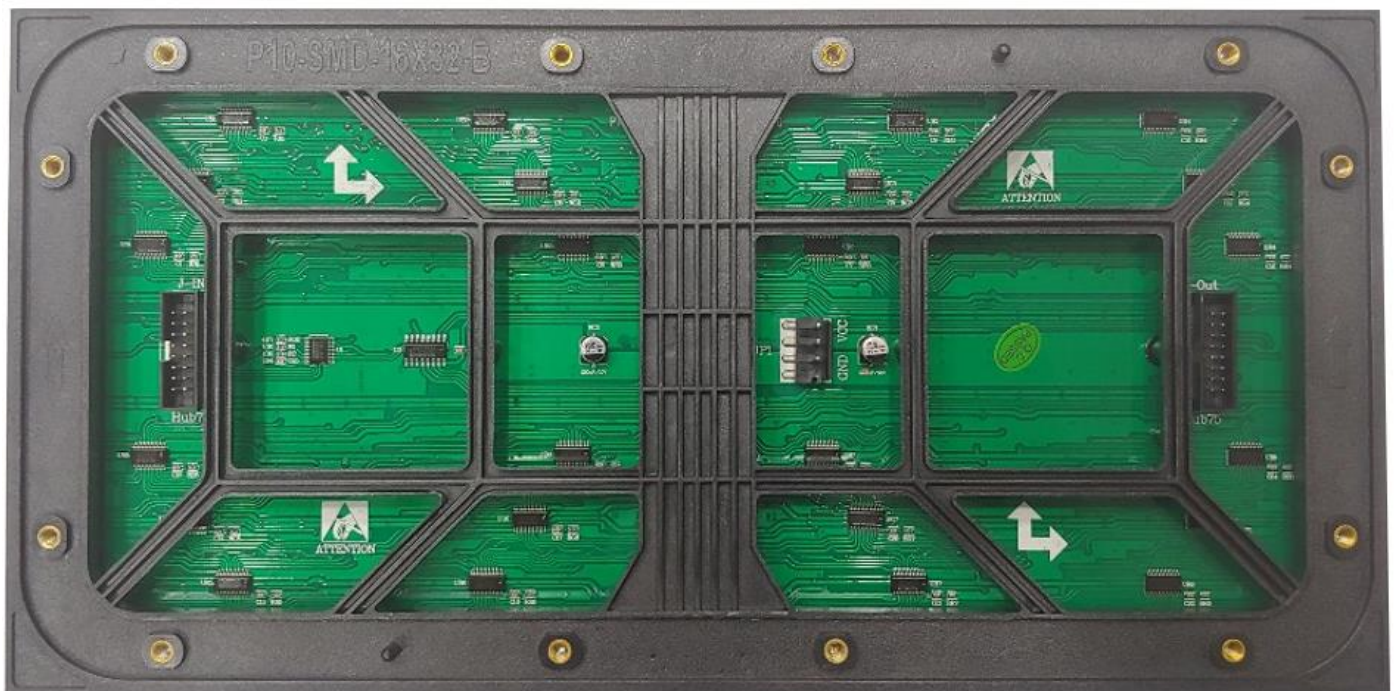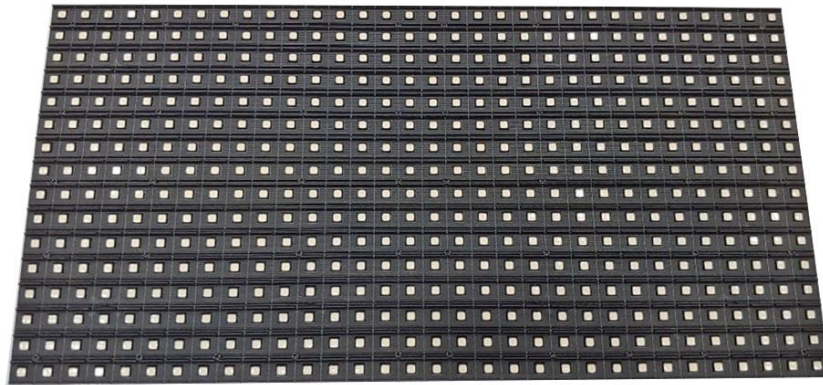

Warranty : 2 Years

1. PIXEL/MODULE Specification

Item	Parameter
Pixel Pitch	10(mm)
Pixel Configuration	1R1G1B / R : G : B=3 : 6 : 1
LED Lamp	Full color
Module Size(H×W)	160 × 320 (mm)
Module Pixel	16 x 32 dots
Module Weight	420(g)
Module Power	40 W
Drive Voltage	DC 4.6 ~ 5.5V

2. Screen Parameter

Item	Parameter
Brightness	≥ 4400 cd/m ²
View Angle	≥140° (Vertical)
	≥140° (Horizontal)
Best View Distance	8 ~ 30m
Scan Mode	1/4 Scan
LED Lamps	SMD3535
Drive IC	5020
Screen Lifespan	Max. 100,000 (Hrs)

3. Environment Condition

Use the environment	Outdoor
Working temperature range	-20~60°C
Working humidity range	10%~95% RH
IP Grade	IP65

4. Signal Function


Pin Number	Pin Name	Function Description
1, 5	R1, R2	Data Input For Green Color
2, 6	G1, G2	Data Input For Blue Color
3, 7	B1, B2	Data Input For Red Color
9, 10, 11, 12	A[0:3]	Line Address
13	CLK	Shift Clock For Input Data
14	LATCH	Data Strobe
15	OE	Out Enable
4, 8, 16	GND	Ground

5. Connector Cable Specification

Data Cable: 16Pin Flat Cable



6. Frame Dimention

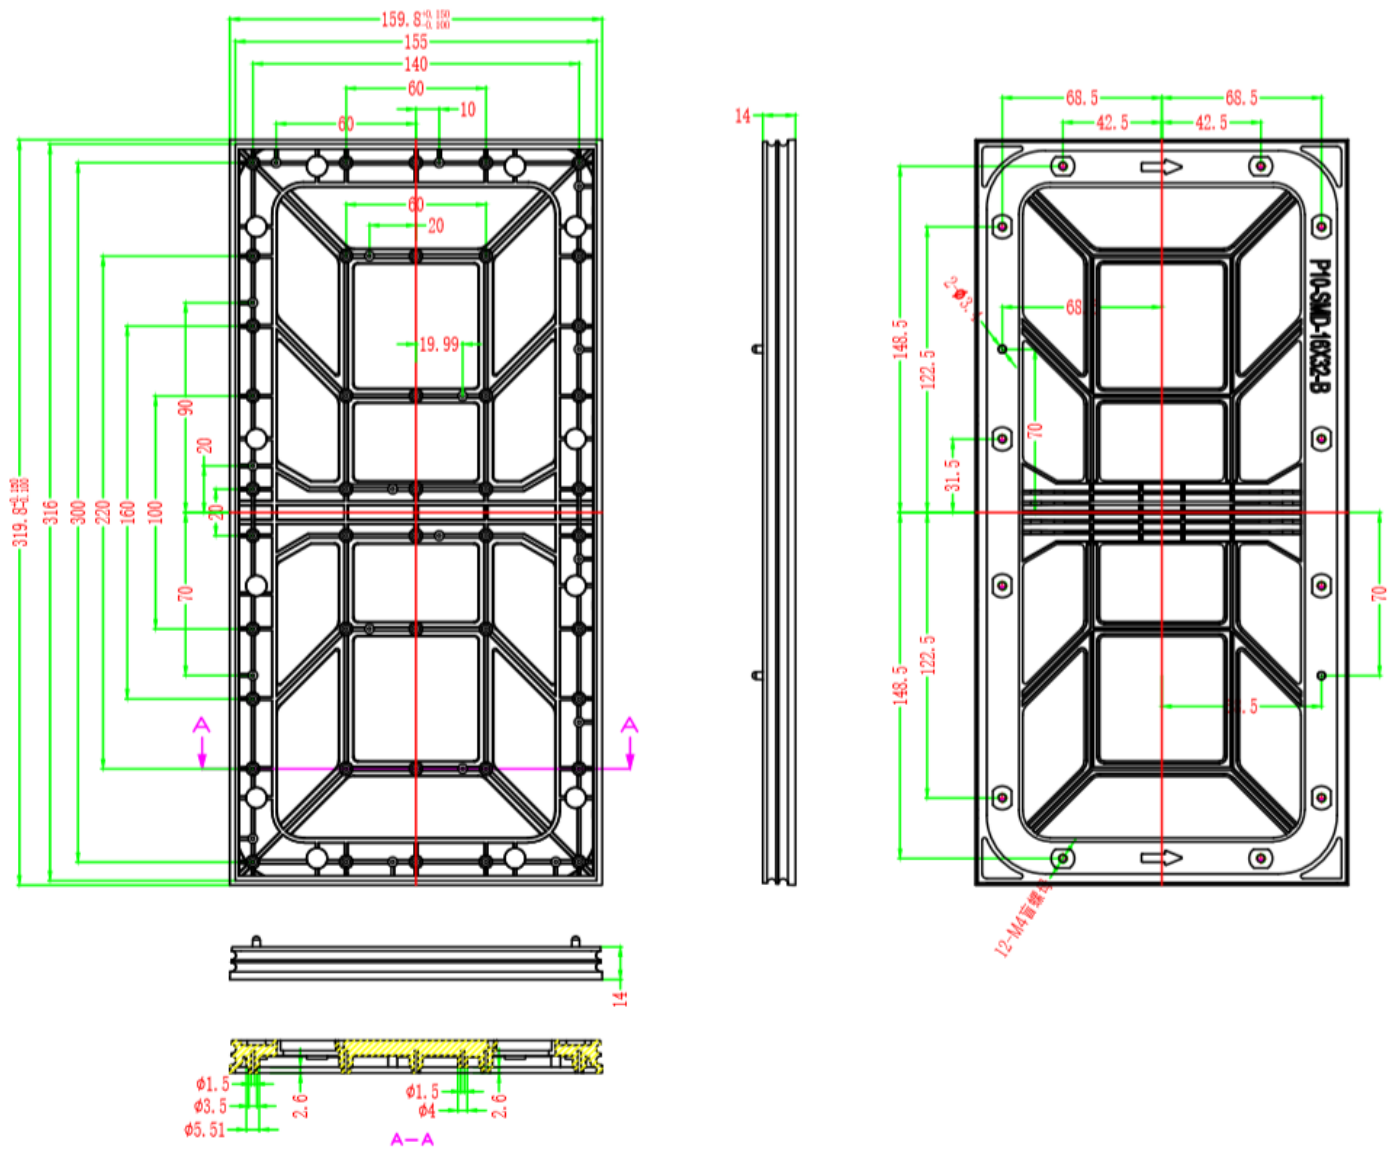

There are 10 pieces of M4 fixing screws.