




Industrial LED Display Solution for PLC, PC, Embedded system



[PLC, PC, 임베디드 시스템 연동 LED 전광판 솔루션]

LED Module

(P3 Indoor, 64x16 dots, 192x48mm, 1/16scan)

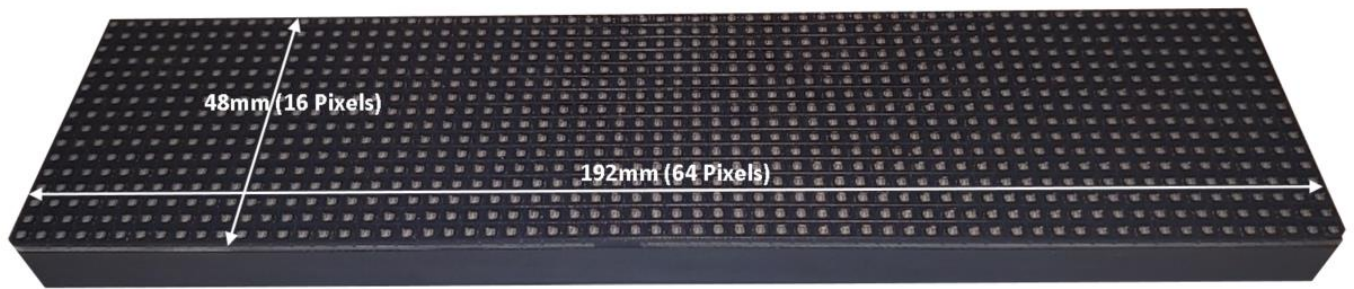

Warranty Time: 2 Years

1. PIXEL/MODULE Specification

Item	Parameter
Pixel Pitch	3(mm)
Pixel Configuration	1R1G1B / R : G : B=3 : 6 : 1
LED Lamp	Full color
Module Size(WxHxD)	192 × 48 x 12.5 (mm)
Module Pixel	64 x 16
Module Weight	95(g)
Module Power (w)	8W
Drive Voltage	DC 4.6 ~ 5.5V

2. Screen Parameter

Item	Parameter
Brightness	≥ 900 cd/m²
View Angle	≥120° (Vertical)
	≥120° (Horizontal)
Best View Distance	3 ~ 9m
Scan Mode	1/16 Scan
Drive IC	MBI 5125
Screen Lifespan	Max. 100,000 (Hrs)

3. Environment Condition

Use the environment	Indoor
Working temperature range	-20~65°C
Working humidity range	10%~90% RH
Storage temperature range	0~40°C

4. Signal Function

Pin Number	Pin Name	Function Description
1, 5	R1, R2	Data Input For Green Color
2, 6	G1, G2	Data Input For Blue Color
3, 7	B1, B2	Data Input For Red Color
9, 10, 11, 12	A[0:3]	Line Address
13	CLK	Shift Clock For Input Data
14	LATCH	Data Strobe
15	OE	Out Enable
4, 8, 16	GND	Ground

5. Connector Cable Specification

Data Cable: 16Pin Flat Cable



7. Signal Flow (16 x 16 DOT MATRIX, 1/16 duty)

DATA NO.	DATA FLOW
Data 1	1.16 → 1.1 → 2.16 → 2.1 → 3.16 → 3.1 16.16 → 16.1

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
1	1.1	←														1.16
2	2.1															2.16
3																
4																
5																
6																
7																
8																
9																
10																
11																
12																
13																
14																
15																
16	16.1	←														16.16