




LED Module Spec.



(DABIT P4_64mm_32x32_16S Indoor)

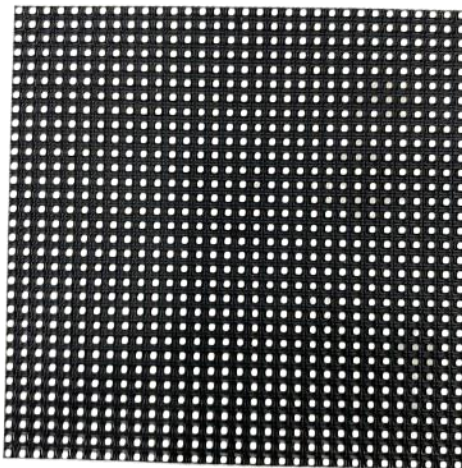

1. PIXEL/MODULE Specification

Item	Parameter
Pixel Pitch	4(mm)
Pixel Configuration	1R1G1B / R : G : B=3 : 6 : 1
LED Lamp	Full color
Module Size(W×H×D)	128×128×13(mm)
Module Pixel	32 x 32 = 1024dot
Module Weight	110(g)
Module Power	Max. 10 W
Module Electric Current	Max. 2A
Drive Voltage	DC 4.6 ~ 5.5V

2. Screen Parameter

Item	Parameter
Brightness	≥800 cd/m ²
View Angle	≥120° (Vertical)
	≥140° (Horizontal)
Best View Distance	Min. 4m
Scan Mode	1/16 Scan
Drive IC	MBI5124 + ICN2012
Screen Lifespan	Max. 100,000 (Hrs)
Drive Mode	1/16 Duty Drive

3. Environment Condition

Use the environment	indoor
Operating temperature range	-20~65°C
Operating humidity range	10%~90% RH
Storage temperature range	0~40°C

4. Signal Function

Pin Number	Pin Name	Function Description
1, 5	R1, R2	Data Input For Green Color
2, 6	G1, G2	Data Input For Blue Color
3, 7	B1, B2	Data Input For Red Color
9, 10, 11, 12	A[0:3]	Line Address
13	CLK	Shift Clock For Input Data
14	LATCH	Data Strobe
15	OE	Out Enable
4, 8, 16	GND	Ground

5. Connector Cable Specification

Data Cable: 16Pin Flat Cable



6. Dimention (128 x 128 x 12.5mm)

