

Materials:

Plunger: Brass 0.125um Au over Ni

Barrel: Brass 0.125um Au over Ni

Spring: SUS surface treatment

Mechanical:

Working stroke: 0.3mm

Contact force: 20g \pm 10g @0.3mm full stroke

Life test: 20000 cycles

Electrical:


Rated voltage: 5V


Rated current: 1.5A

Contact resistance: max. 50 mOhm

Other:

ROHS Compliant!

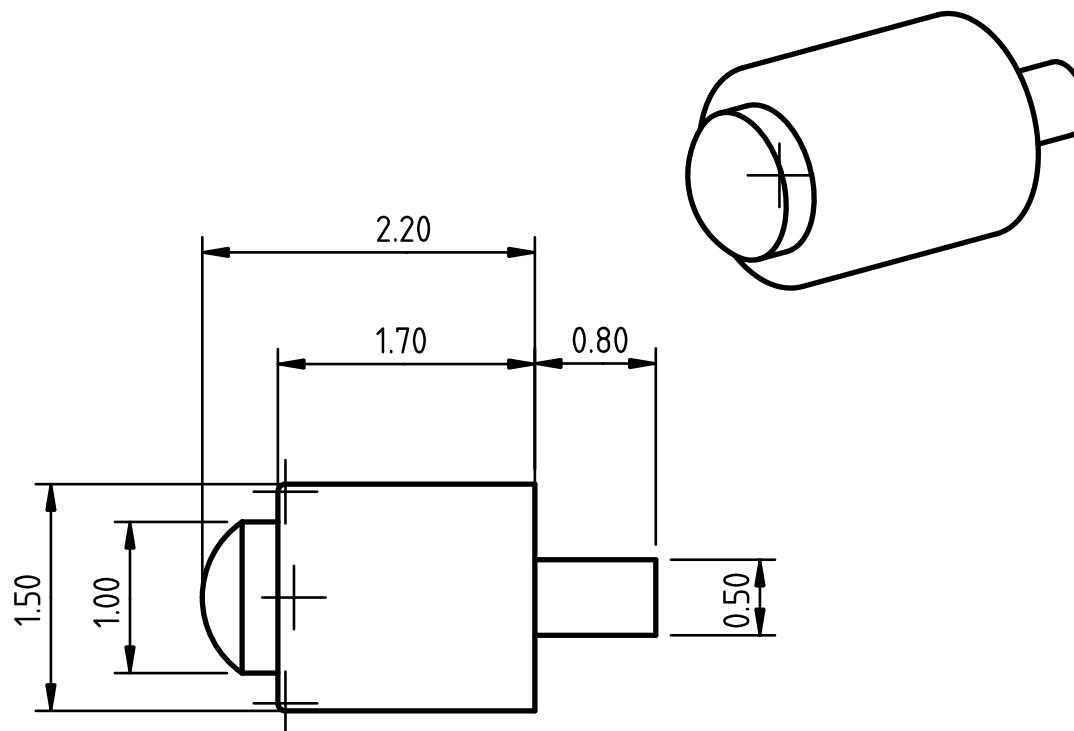

DESIGNED BY: Suku Wc		IS_POGO_D15x22_THT		G	—
DATE: 2019.05.05.		All dimensions are in millimeters (mm)		F	—
SIZE				E	—
A4				D	—
SCALE	WEIGHT (kg)	DRAWING NUMBER		C	—
20:1	N/A	1/1		B	—
		SHEET		A	—
This drawing is our property; it can't be reproduced or communicated without our written consent.					