



Sheet: /UI_ENC/ENCODER_8/
File: UI_ENC_FILTER.kicad_sch

Title:

Size: A4

Date:

Rev:

KiCad E.D.A. 8.0.4

Id: 2/23



Sheet: /UI_ENC/ENCODER_11/
File: UI_ENC_FILTER.kicad_sch

Title:

Size: A4


Date:

Rev:

KiCad E.D.A. 8.0.4

Id: 3/23

900

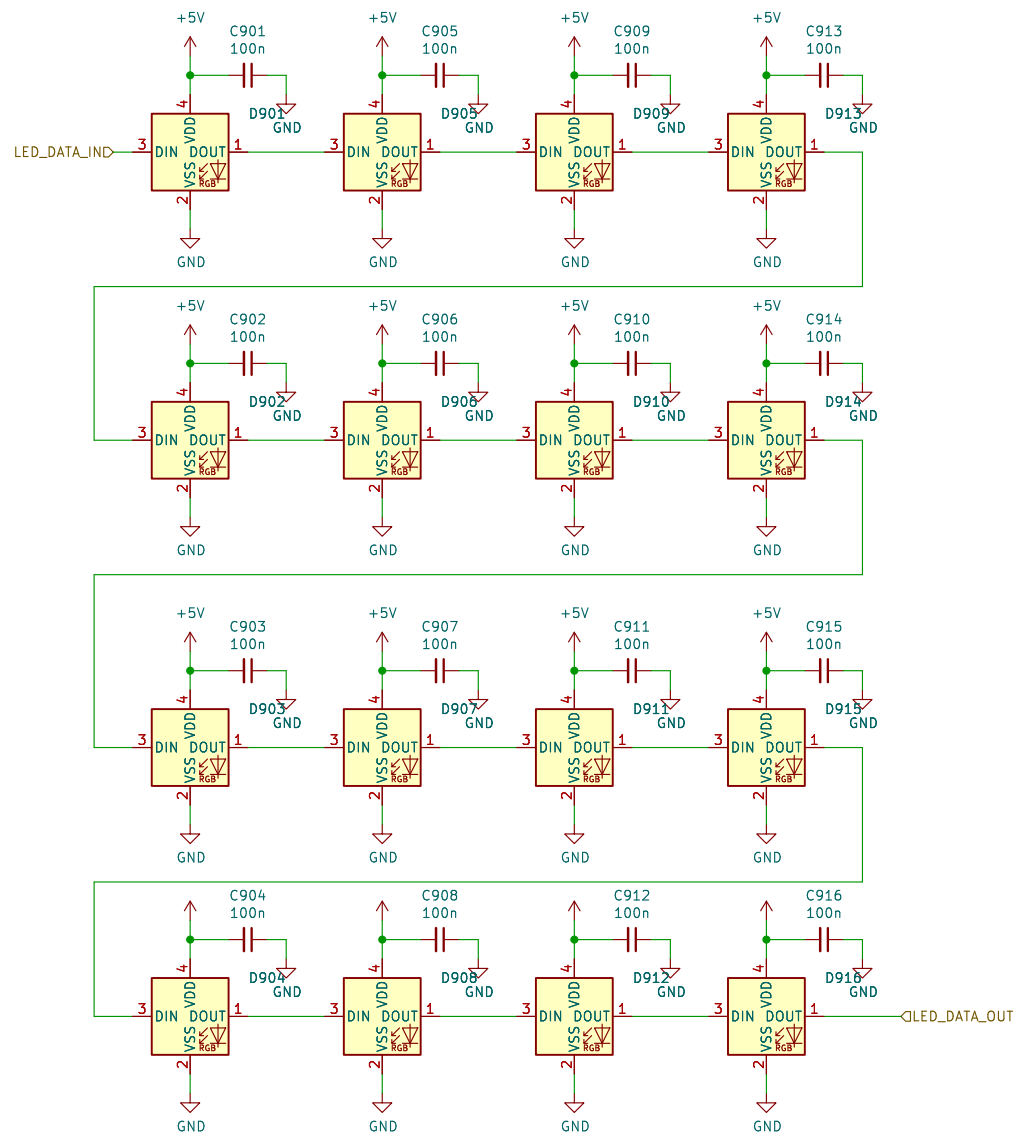

Sheet: /UI_LED/
File: UI_LED.kicad_sch

Title:

Size: A4
KiCad E.D.A. 8.0.4

Date:

Rev:

Id: 4/23



Sheet: /UI_ENC/ENCODER_5/
File: UI_ENC_FILTER.kicad_sch

Title:


Size: A4

Date:





Rev:

KiCad E.D.A. 8.0.4

Id: 5/23




700

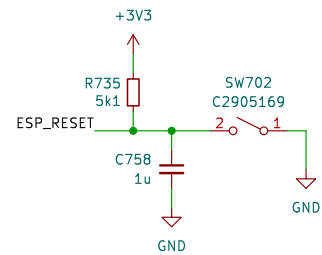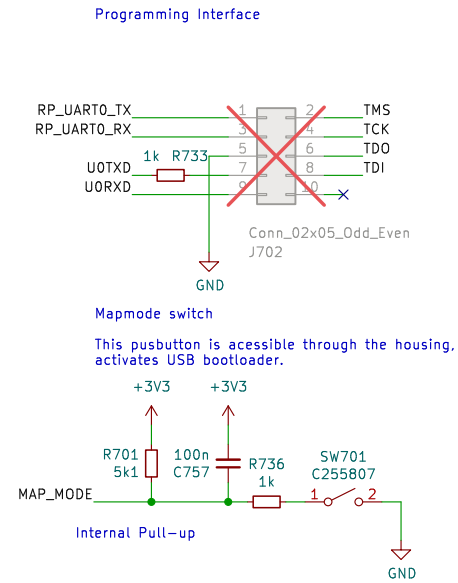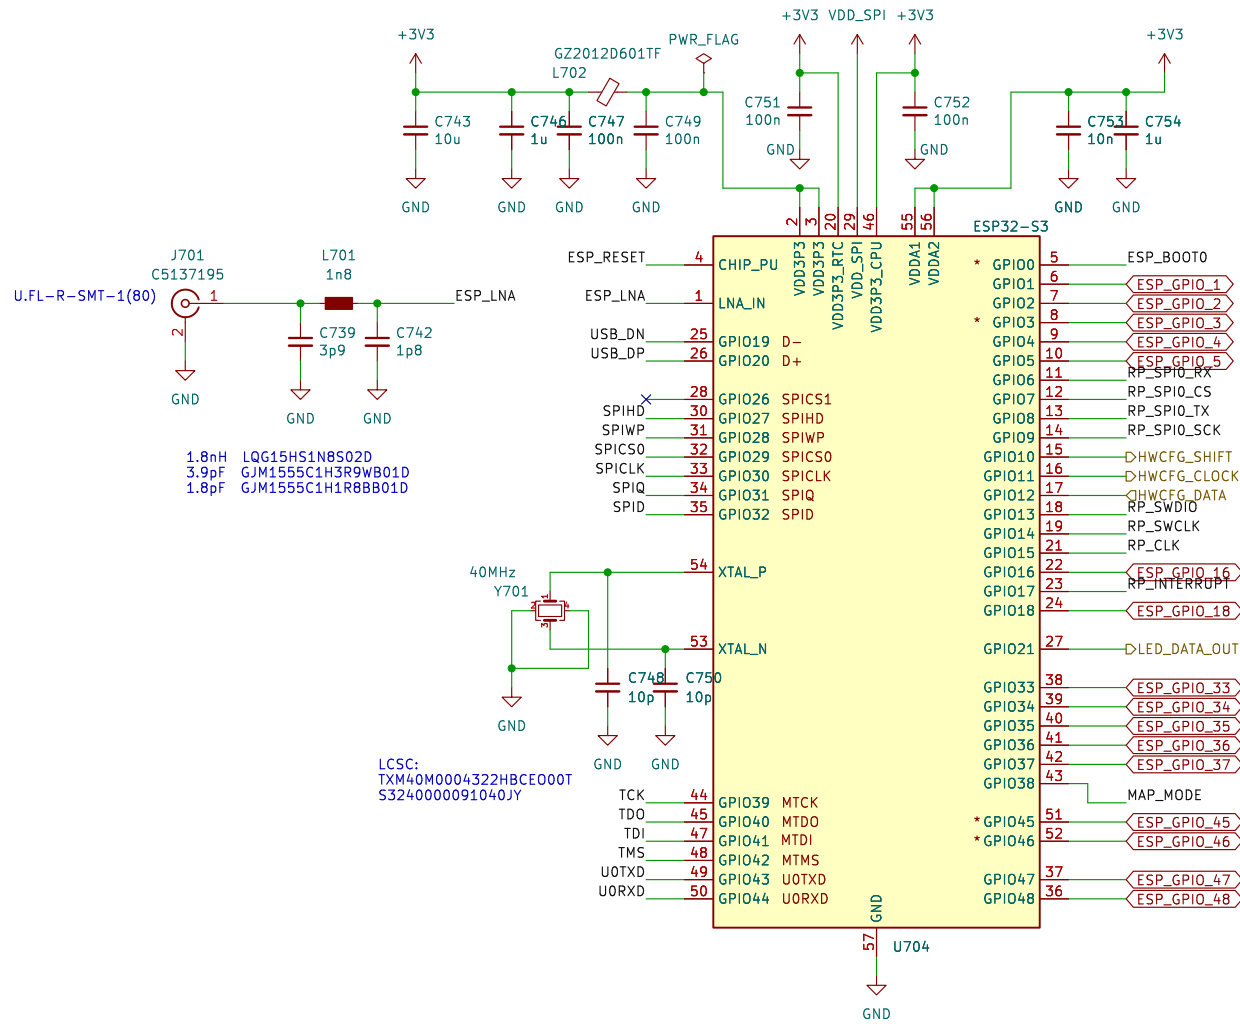

QSPI Flash memory

This memory can be accessed thgrou the QSPI interface of the MCU. Can be used for configuration, static data or program execution.

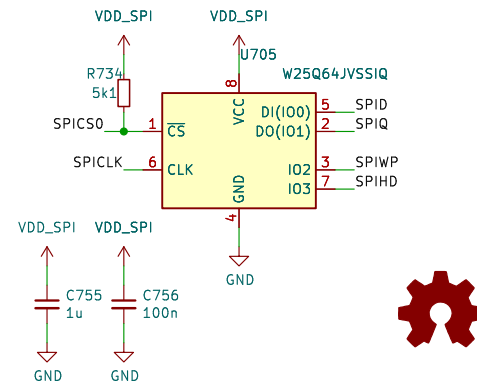


500

GRID Connector
Bi-Directional Data
2x SYNC



Board Mounting Pattern



Sheet: /MCU/sheet5D85C9EA/ File: GRID.kicad_sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 8.0.4		Id: 8/23

600

ESD Diodes
ESD protection for all of the externally accessible nets.

+3V3 LDO Regulators
Regulators for generating independent power rails for the microcontroller and the user interface.


Components and Connections:

- J601 TYPE-C-32-M-12:** USB Type-C connector with pins A9B4, A4B9, CC1, CC2, D-, D+, D-, D+, SBU1, SBU2, SHIELD, SHIELD, SHIELD, SHIELD, GND, GND, GND, GND.
- U601 C5451661:** ESD protection diode for USB_DATA_P, USB_DATA_N, and VBUS.
- TP601 GND, TP602 VB, TP603 D-, TP604 D+:** Test points for USB signals.
- U602 LN1134A332MR-G:** LDO regulator for +3V3 output.
- Capacitors:** C601 (1u), C602 (1u), C603 (4n7), GZ2012D601TF L601.
- Resistors:** R601 (5k1), R602 (5k1), R603 (1M).
- Other:** PWR_FLAG, VBUS, USB_DATA_P, USB_DATA_N, GND, +3V3, UI.

**Sheet: /MCU/Sheet60F06FE1/
File: USB_POWER.kicad_sch**


Title:		Rev:
Size: A4	Date:	Rev:
KiCad E.D.A. 8.0.4		Id: 9/23

ESD protection for all of the externally accessible nets.

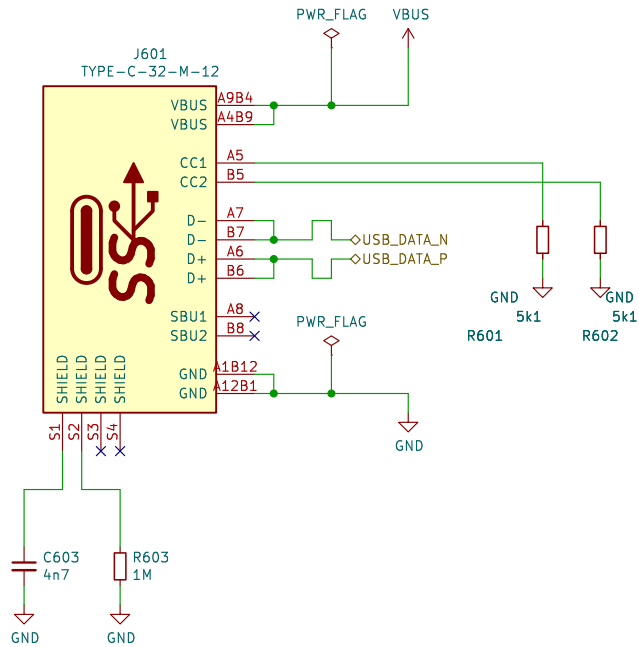[illegible]

Rev:
Id: 9/23

800

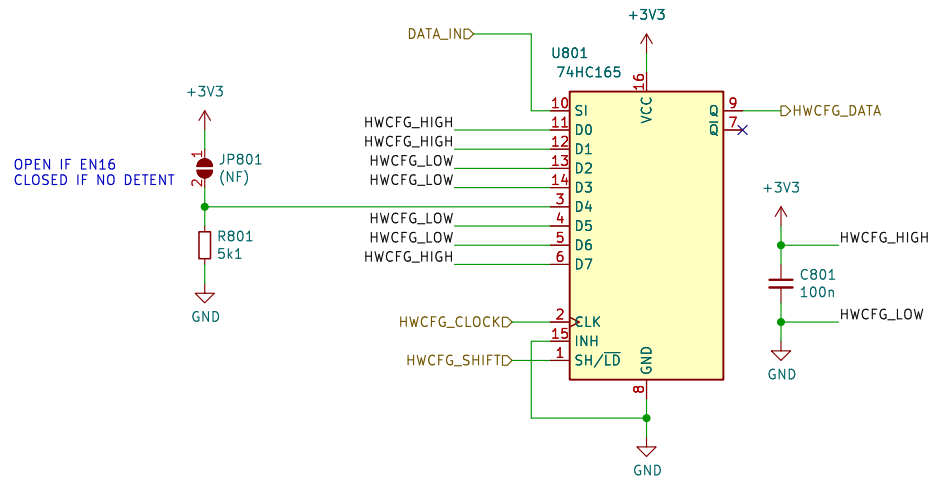

Board Identification

Grid firmware can identify the hardware and the board revision through a 3 wire serial interface using one or more shift register as read only memory. The content of the memory is defined by pulling the inputs high or low through pcb traces or solderable configuration jumpers.

4b'Model + 4b'Revision + nb'Reserved (Multiple shift registers)

D0: MODEL (LSB)
D1: MODEL
D2: MODEL
D3: MODEL (MSB)
D4: REVISION (LSB)
D5: REVISION
D6: REVISION
D7: REVISION (MSB)

Model Codes (D3-D0):

Po16 0000
Bo16 0001
PBF4 0010
EN16 0011
...

Revision Codes (D7-D4):

RevA 0000
RevB 0001
RevC 0010
RevD 0011
...

Sheet: /HWCFG/
File: HWCFG.kicad_sch

Title:

Size: A4

Date:

KiCad E.D.A. 8.0.4

Rev:

Id: 10/23





Sheet: /UI_ENC/ENCODER_6/
File: UI_ENC_FILTER.kicad_sch

Title:


Size: A4


Date:

Rev:

KiCad E.D.A. 8.0.4

Id: 12/23

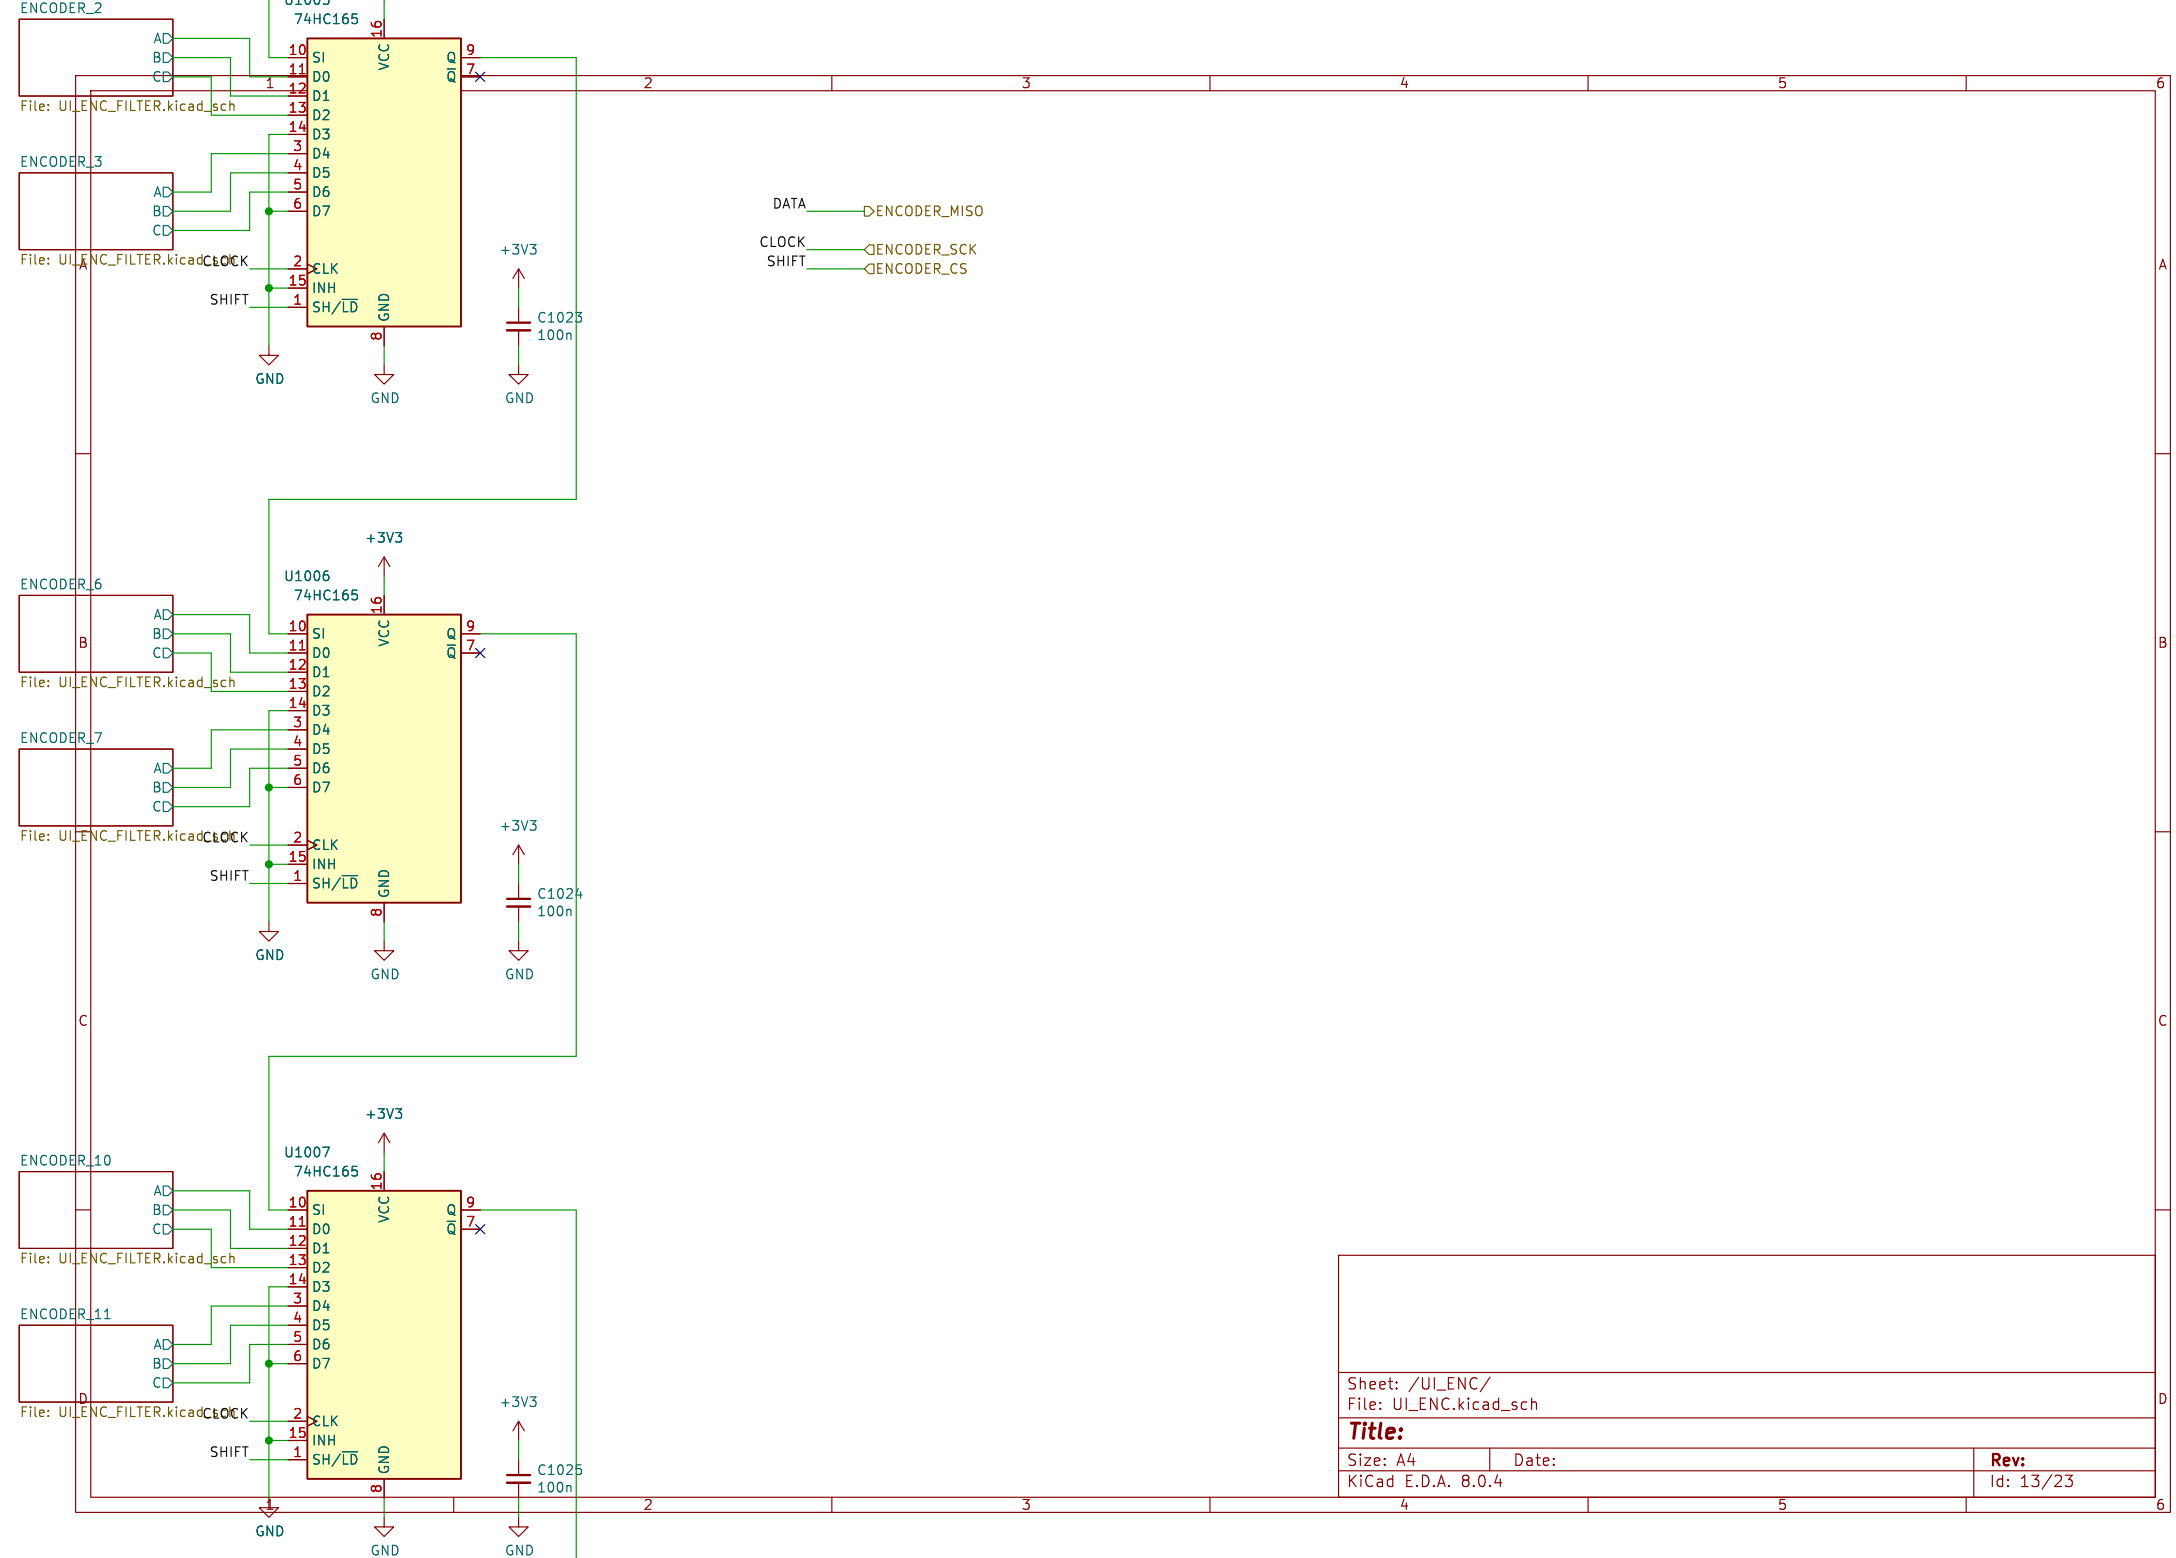

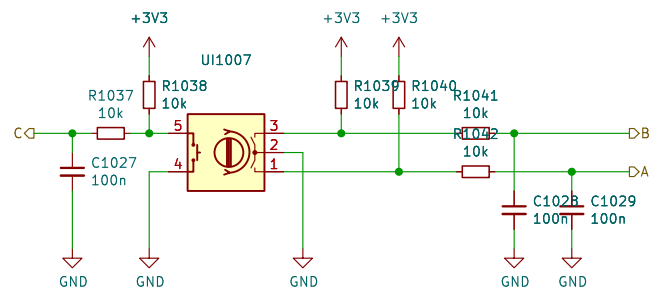

Sheet: /UI_ENC/ENCODER_3/
File: UI_ENC_FILTER.kicad_sch

Title:

Size: A4

Date:

Rev:

KiCad E.D.A. 8.0.4

Id: 14/23



Sheet: /UI_ENC/ENCODER_1/
File: UI_ENC_FILTER.kicad_sch

Title:

Size: A4

Date:

Rev:

KiCad E.D.A. 8.0.4

Id: 15/23

Sheet: /UI_ENC/ENCODER_7/
File: UI_ENC_FILTER.kicad_sch

Title:


Size: A4

Date:

Size: A4	
KiCad E.D.A. 8.0.4	

Rev:

Id: 16/23





Sheet: /UI_ENC/ENCODER_13/
File: UI_ENC_FILTER.kicad_sch

Title:

Size: A4

Date:

Rev:

KiCad E.D.A. 8.0.4

Id: 18/23



Sheet: /UI_ENC/ENCODER_10/
File: UI_ENC_FILTER.kicad_sch

Title:


Size: A4

Date:

Rev:

KiCad E.D.A. 8.0.4

Id: 19/23





Sheet: /UI_ENC/ENCODER_2/
File: UI_ENC_FILTER.kicad_sch

Title:

Size: A4

Date:

Rev:

KiCad E.D.A. 8.0.4

Id: 21/23





Sheet: /UI_ENC/ENCODER_9/
File: UI_ENC_FILTER.kicad_sch

Title:

Size: A4

Date:

Rev:

KiCad E.D.A. 8.0.4

Id: 23/23