


900

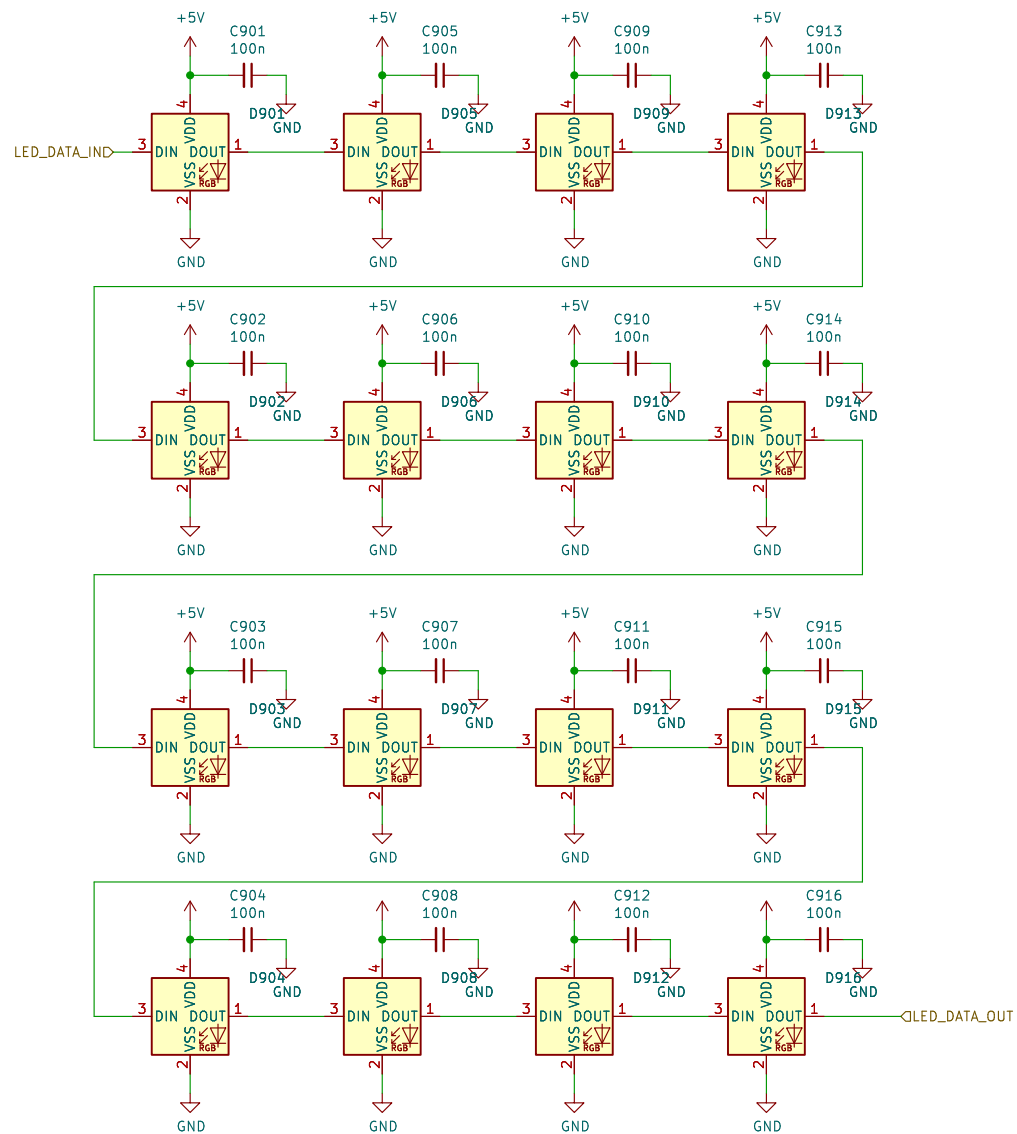

Sheet: /UI_LED/
File: UI_LED.kicad_sch







Title:

Size: A4
KiCad E.D.A. 9.0.1


Date:

Rev:
Id: 4/23

700

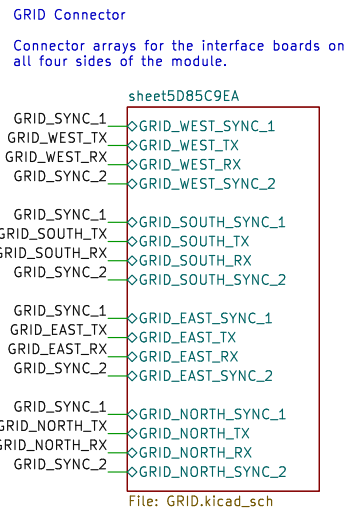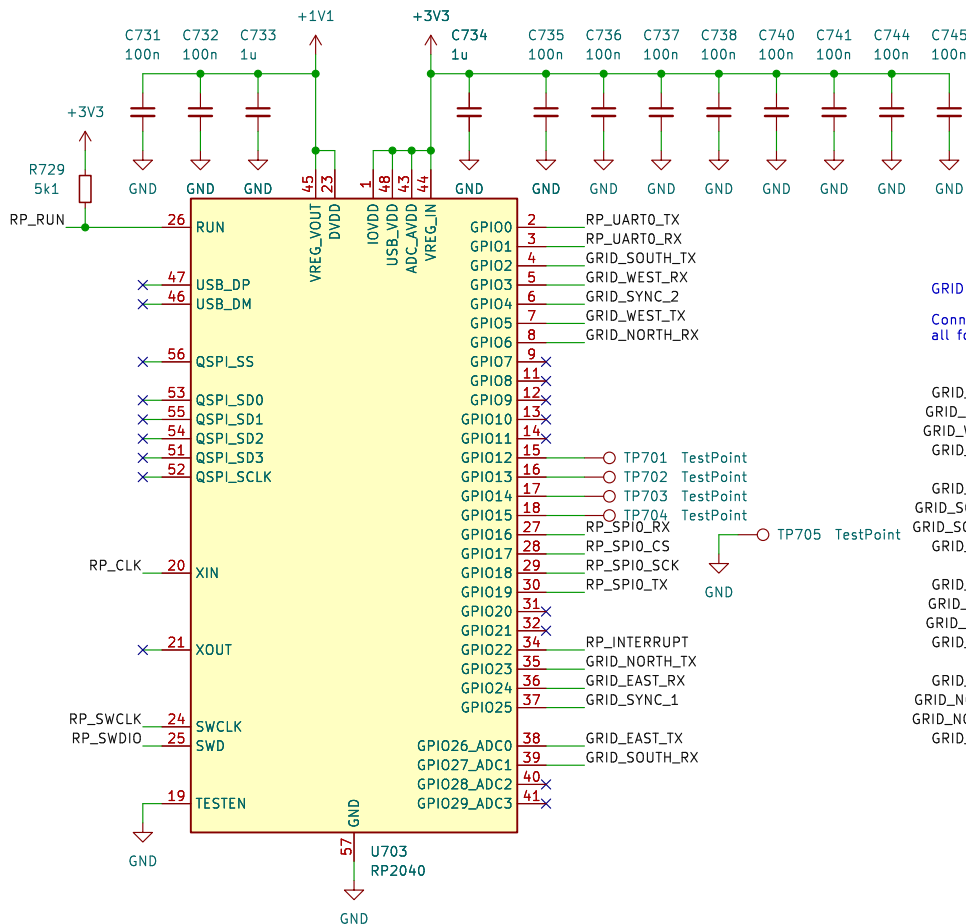
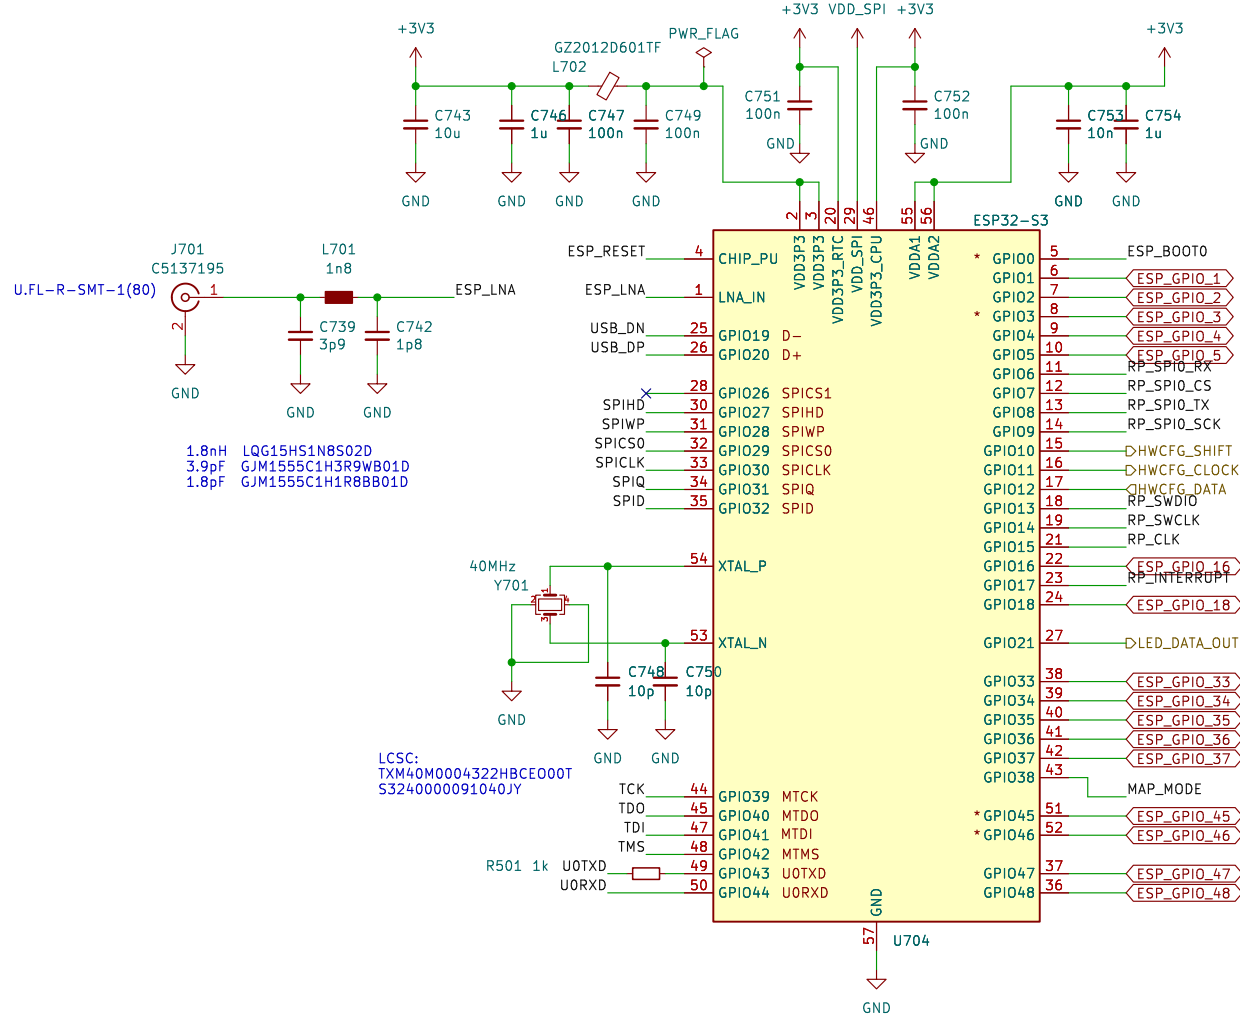
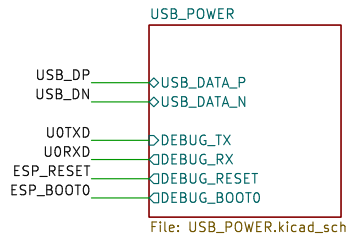


Programming Interface

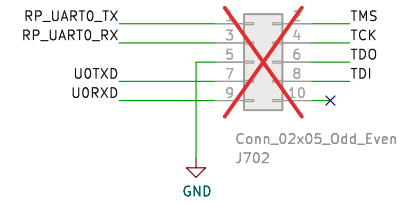


Mapmode switch

This pusbutton is accessible through the housing, activates USB bootloader.

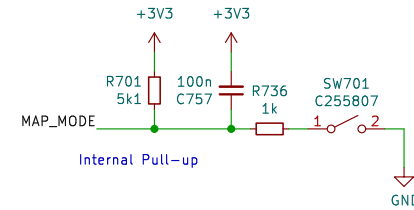


QSPI Flash memory

This memory can be accessed through the QSPI interface of the MCU. Can be used for configuration, static data or program execution.

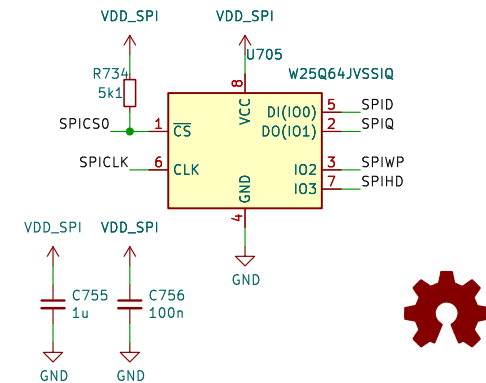

800

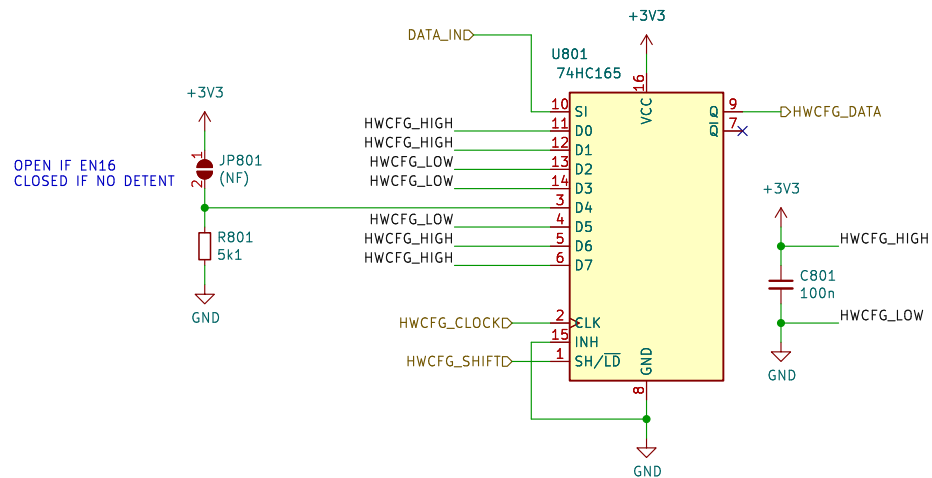

Board Identification

Grid firmware can identify the hardware and the board revision through a 3 wire serial interface using one or more shift register as read only memory. The content of the memory is defined by pulling the inputs high or low through pcb traces or solderable configuration jumpers.

4b'Model + 4b'Revision + nb'Reserved (Multiple shift registers)

D0: MODEL (LSB)
D1: MODEL
D2: MODEL
D3: MODEL (MSB)
D4: REVISION (LSB)
D5: REVISION
D6: REVISION
D7: REVISION (MSB)

Model Codes (D3–D0):

Po16 0000
Bo16 0001
PBF4 0010
EN16 0011
...

Revision Codes (D7–D4):

RevA 0000
RevB 0001
RevC 0010
RevD 0011
...

Sheet: /HWC_CFG/
File: HWC_CFG.kicad_sch

Title:


Size: A4


Date:

KiCad E.D.A. 9.0.1

Rev:

Id: 10/23

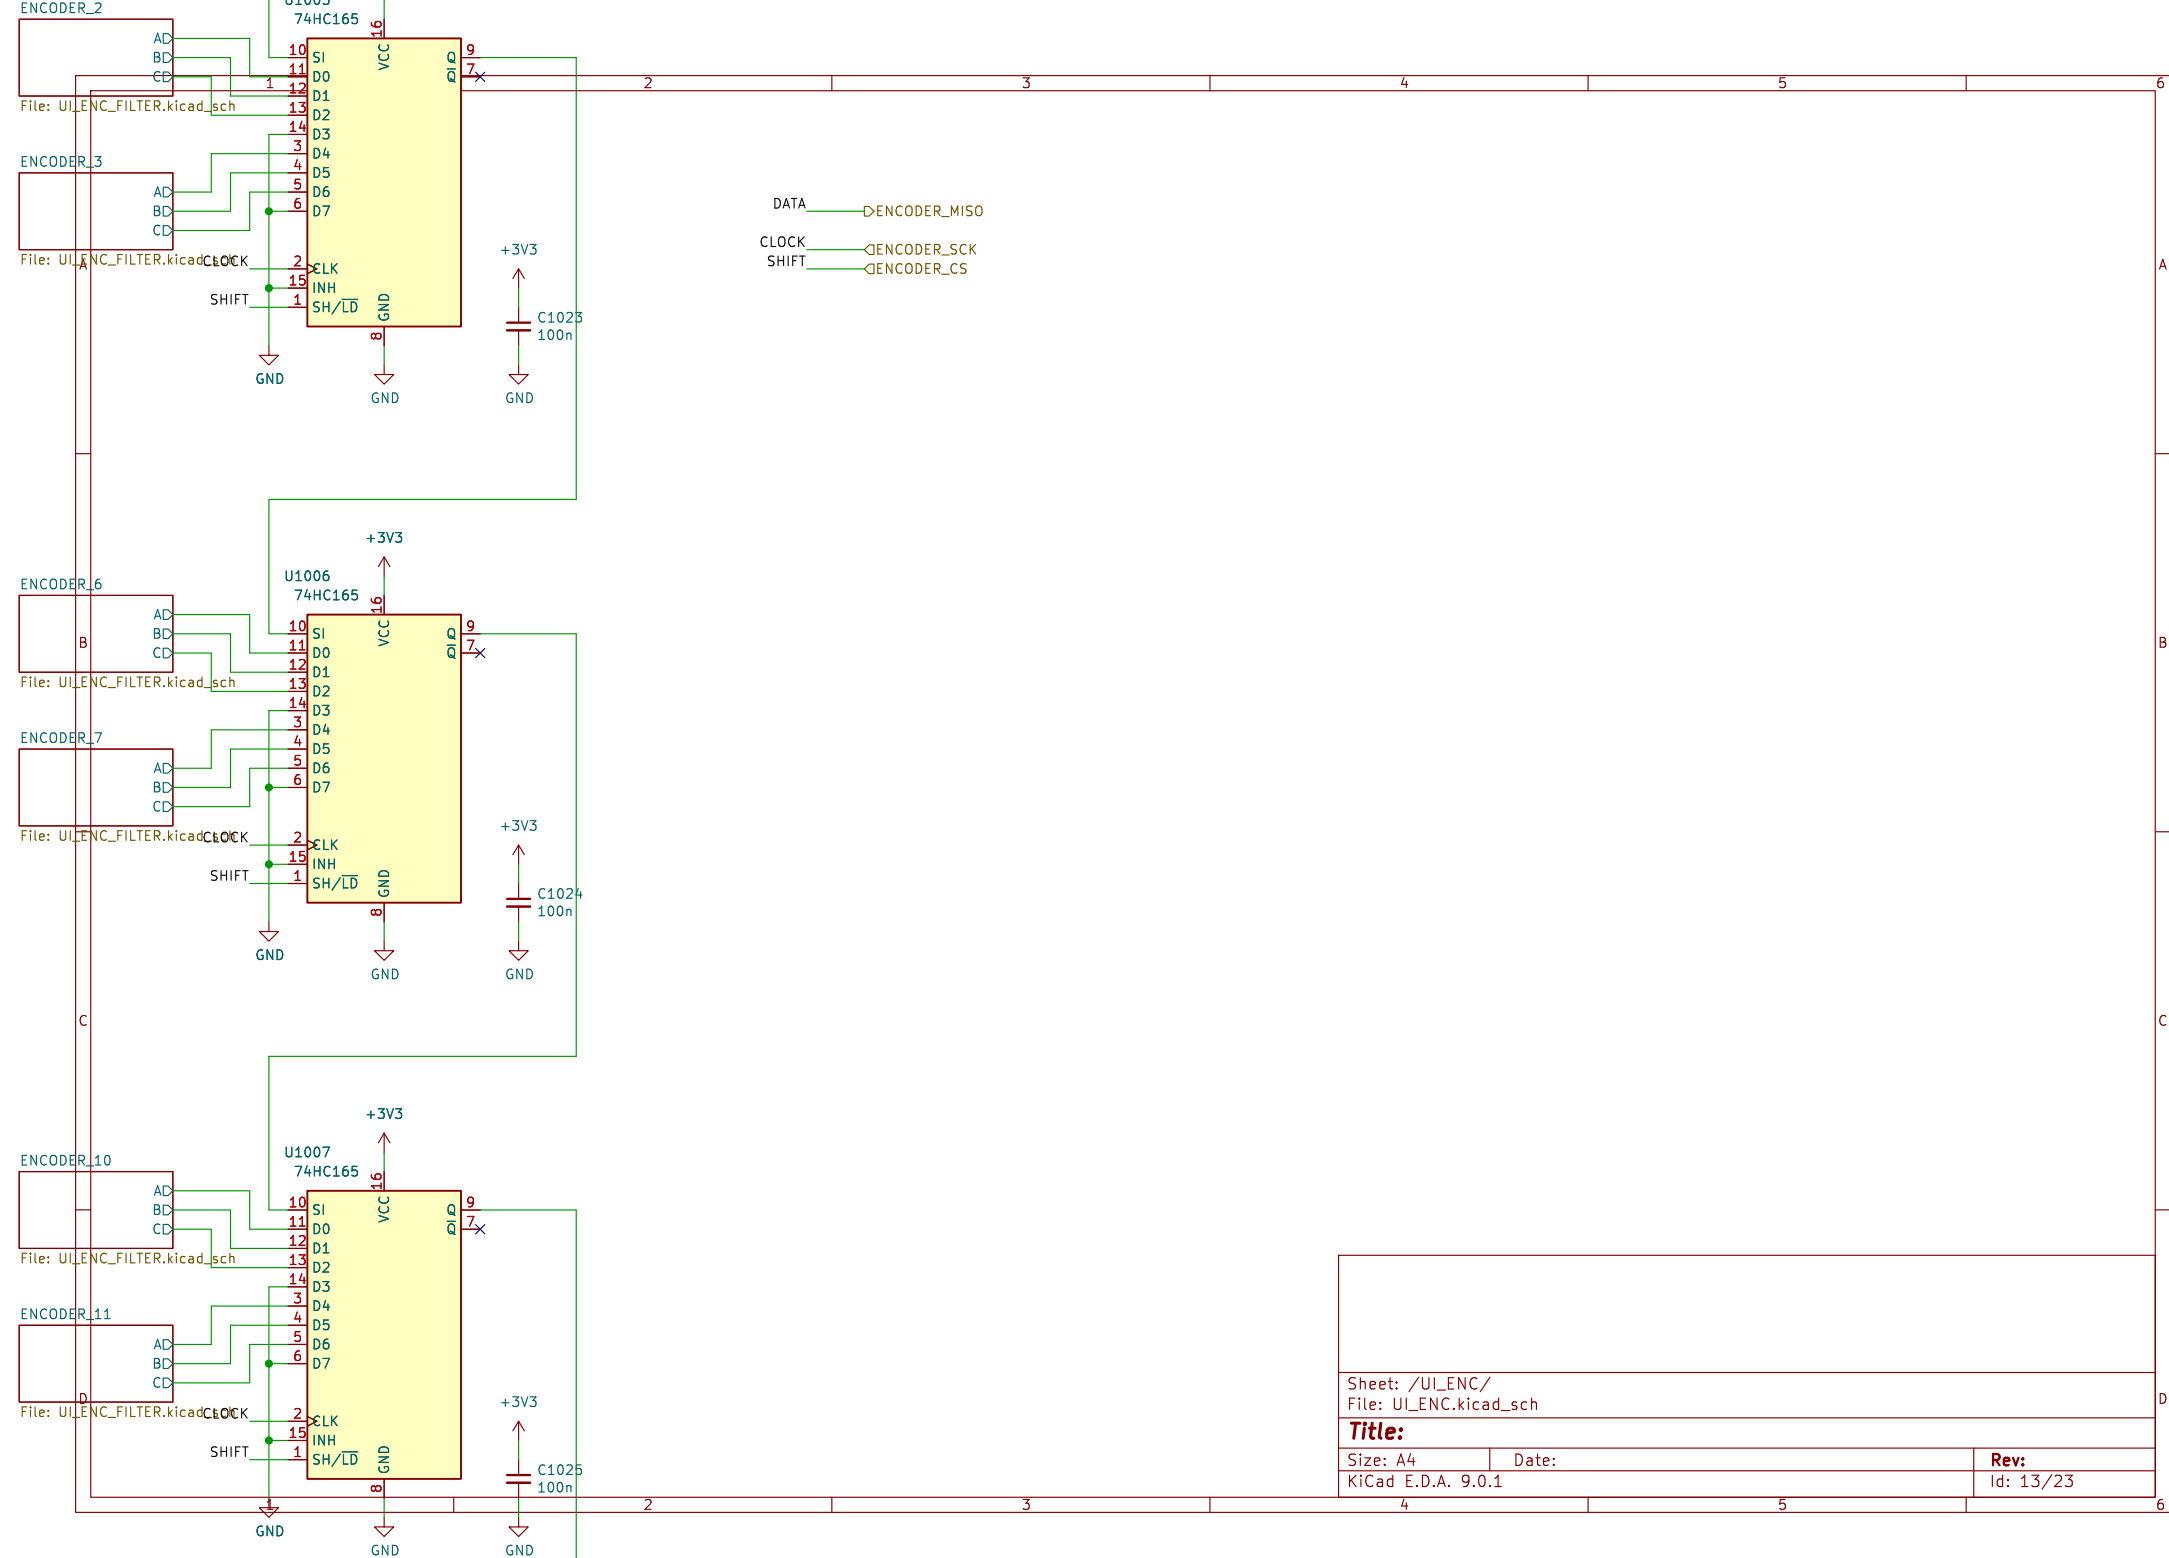

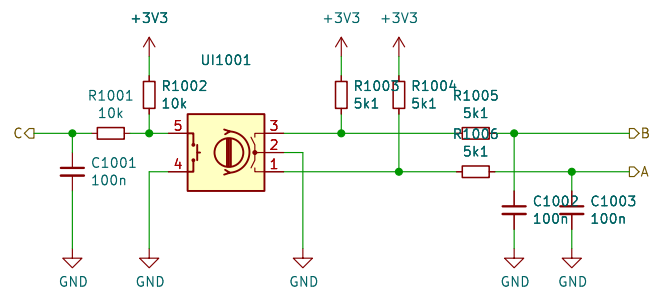

Sheet: /UI_ENC/ENCODER_8/
File: UI_ENC_FILTER.kicad_sch

Title:

Size: A4


Date:

Rev:

KiCad E.D.A. 9.0.1

Id: 2/23

Id: 3/23

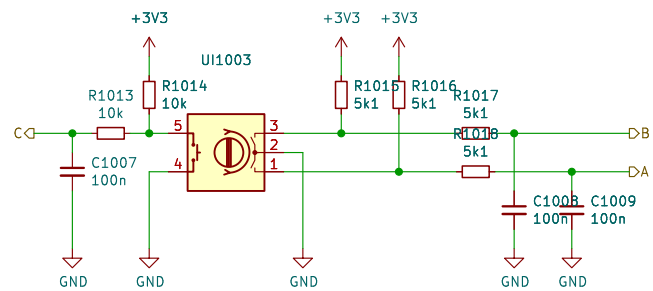

Sheet: /UI_ENC/ENCODER_5/
File: UI_ENC_FILTER.kicad_sch

Title:


Size: A4

Date:

Rev:

KiCad E.D.A. 9.0.1

Id: 5/23

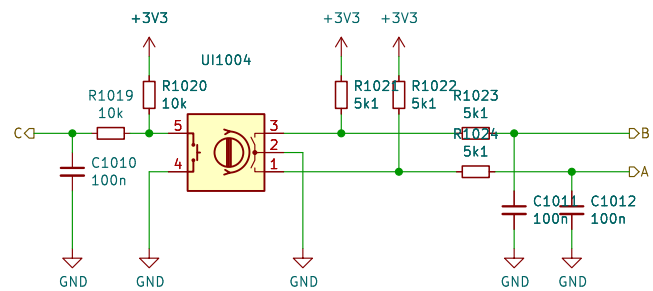

Sheet: /UI_ENC/ENCODER_12/
File: UI_ENC_FILTER.kicad_sch

Title:

Size: A4

Date:

Rev:


KiCad E.D.A. 9.0.1

Id: 6/23

500

GRID Connector
Bi-Directional Data
2x SYNC

Board Mounting Pattern




Sheet: /MCU/sheet5D85C9EA/ File: GRID.kicad_sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 9.0.1		Id: 8/23

600


USB Port ESD Prot.

USB C upstream facing port configured for 5V 3A power consumption.

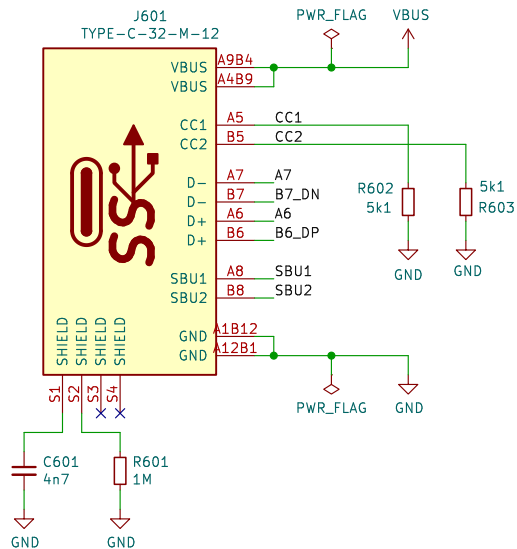


Debug-Mode Multiplexing

Debug mode is activated when both CC1 and CC2 are pulled to logic high externally.

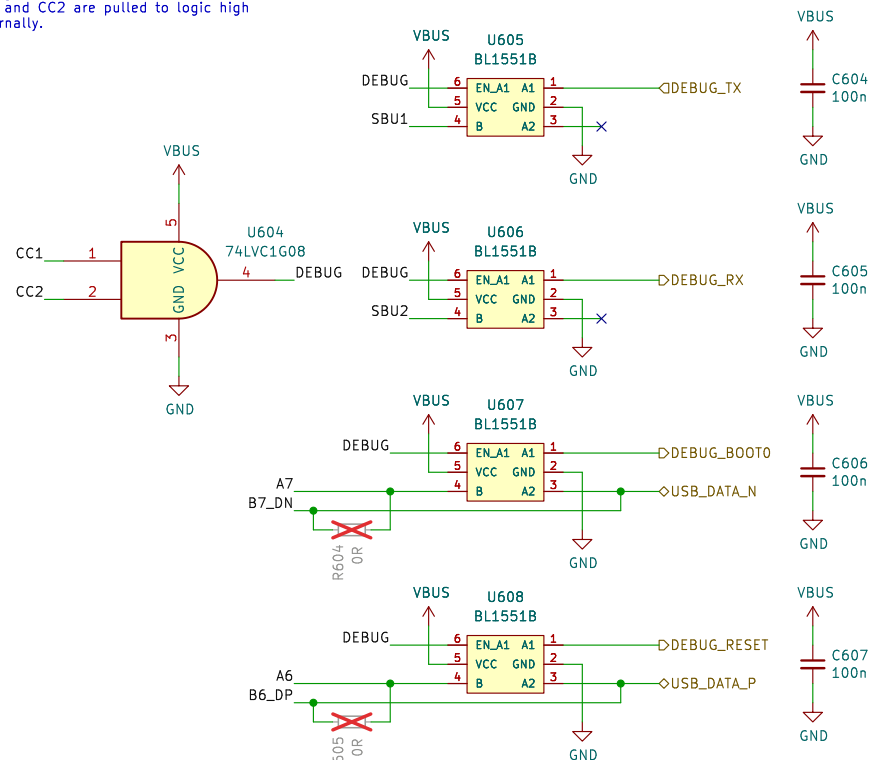


3V3 LDO

LDO regulator for generating the +3V3 power rail for the microcontroller and UI.

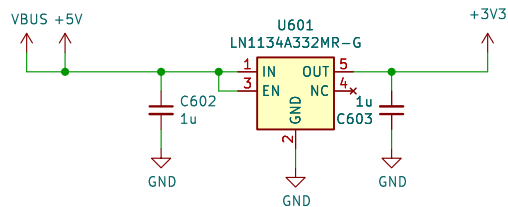

Testpoints

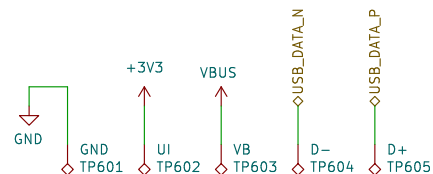

Sheet: /MCU/USB_POWER/
File: USB_POWER.kicad_sch

Title:


Size: A4

Date:

KiCad E.D.A. 9.0.1

Rev:

Id: 9/23

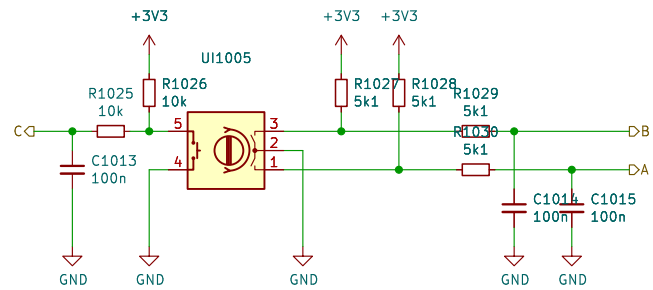

Sheet: /UI_ENC/ENCODER_0/
File: UI_ENC_FILTER.kicad_sch

Title:

Size: A4


Date:

Rev:

KiCad E.D.A. 9.0.1

Id: 11/23



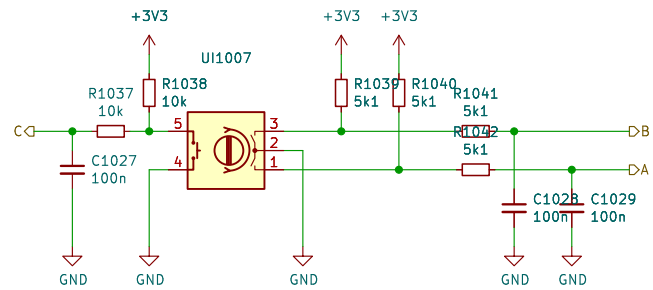

Sheet: /UI_ENC/ENCODER_3/
File: UI_ENC_FILTER.kicad_sch

Title:


Size: A4

Date:

Rev:

KiCad E.D.A. 9.0.1

Id: 14/23

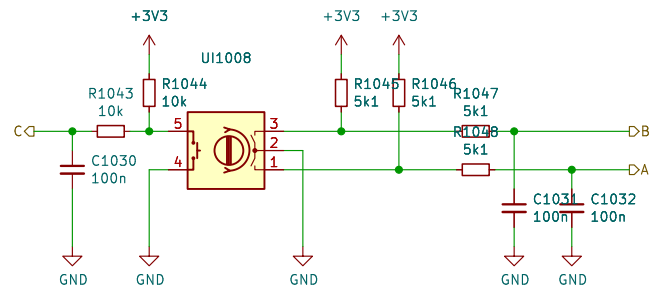

Sheet: /UI_ENC/ENCODER_1/
File: UI_ENC_FILTER.kicad_sch

Title:


Size: A4

Date:

Rev:

KiCad E.D.A. 9.0.1

Id: 15/23

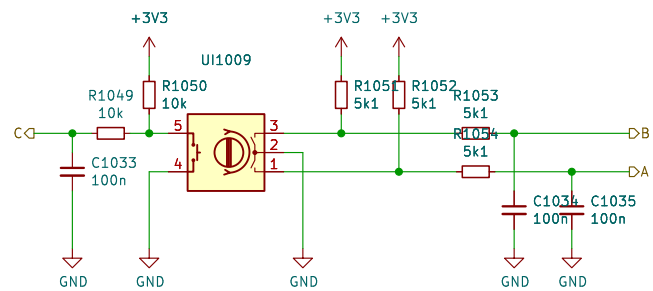

Sheet: /UI_ENC/ENCODER_7/
File: UI_ENC_FILTER.kicad_sch

Title:


Size: A4

Date:

Rev:

KiCad E.D.A. 9.0.1

Id: 16/23

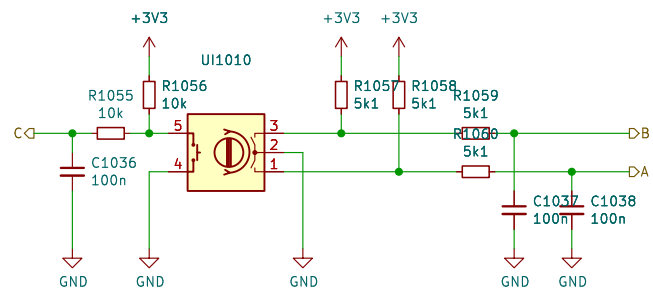

Sheet: /UI_ENC/ENCODER_14/
File: UI_ENC_FILTER.kicad_sch

Title:


Size: A4

Date:

Rev:

KiCad E.D.A. 9.0.1

Id: 17/23

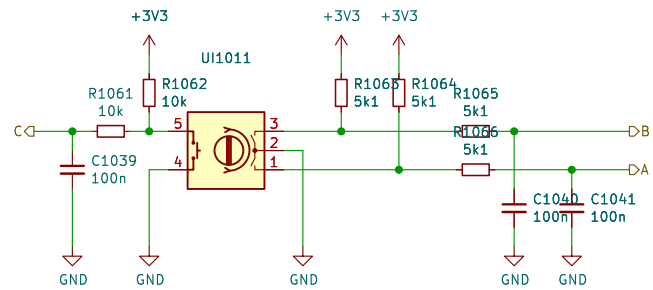

Sheet: /UI_ENC/ENCODER_13/
File: UI_ENC_FILTER.kicad_sch

Title:


Size: A4

Date:

Rev:

KiCad E.D.A. 9.0.1

Id: 18/23

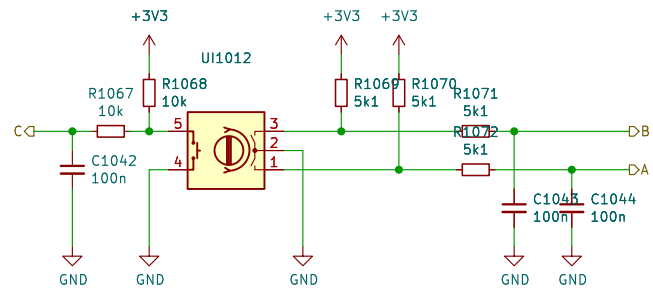

Sheet: /UI_ENC/ENCODER_10/
File: UI_ENC_FILTER.kicad_sch

Title:


Size: A4

Date:

Rev:

KiCad E.D.A. 9.0.1

Id: 19/23

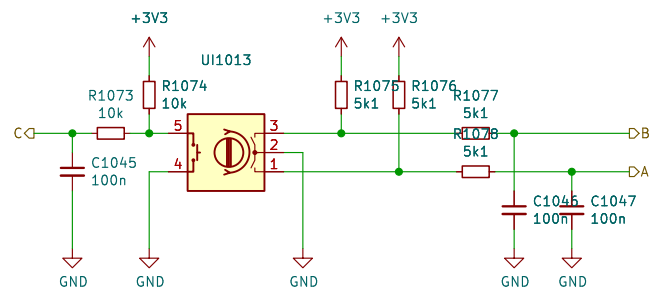

Sheet: /UI_ENC/ENCODER_15/
File: UI_ENC_FILTER.kicad_sch

Title:


Size: A4

Date:

Rev:

KiCad E.D.A. 9.0.1

Id: 20/23

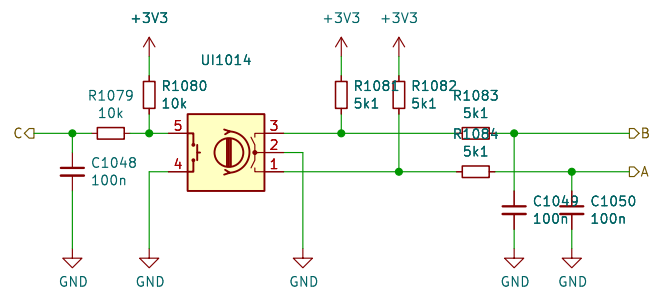

Sheet: /UI_ENC/ENCODER_2/
File: UI_ENC_FILTER.kicad_sch

Title:


Size: A4

Date:

Rev:

KiCad E.D.A. 9.0.1

Id: 21/23

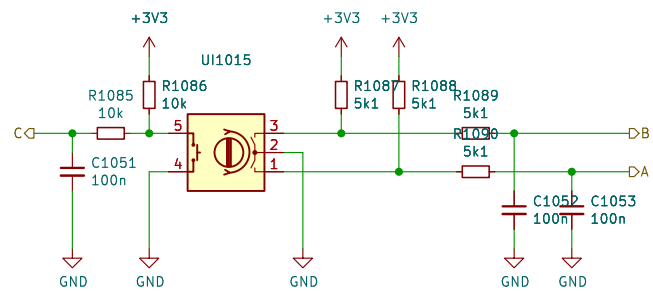

Sheet: /UI_ENC/ENCODER_4/
File: UI_ENC_FILTER.kicad_sch

Title:


Size: A4

Date:

Rev:

KiCad E.D.A. 9.0.1

Id: 22/23

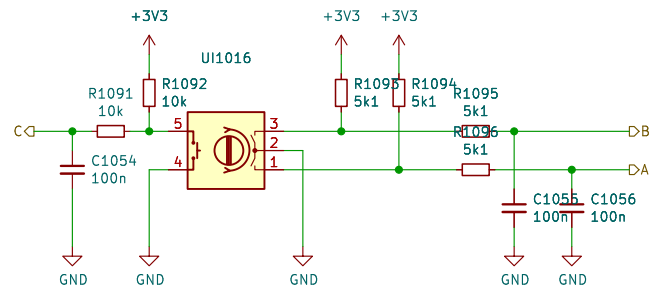

Sheet: /UI_ENC/ENCODER_9/
File: UI_ENC_FILTER.kicad_sch

Title:

Size: A4

Date:

Rev:

KiCad E.D.A. 9.0.1

Id: 23/23