Materials:

Plunger: Brass 0.125um Au over Ni
Barrel: Brass 0.125um Au over Ni
Spring: SUS surface treatment

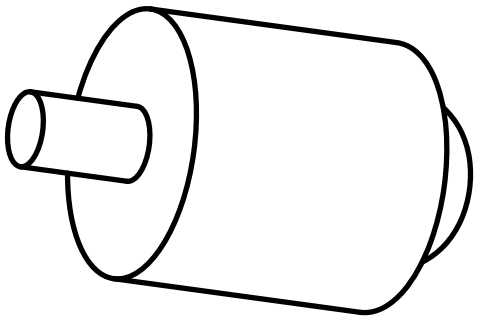

Mechanical:

Working stroke: 0.3mm
Contact force: 20g ± 10g @0.3mm full stroke
Life test: 20000 cycles

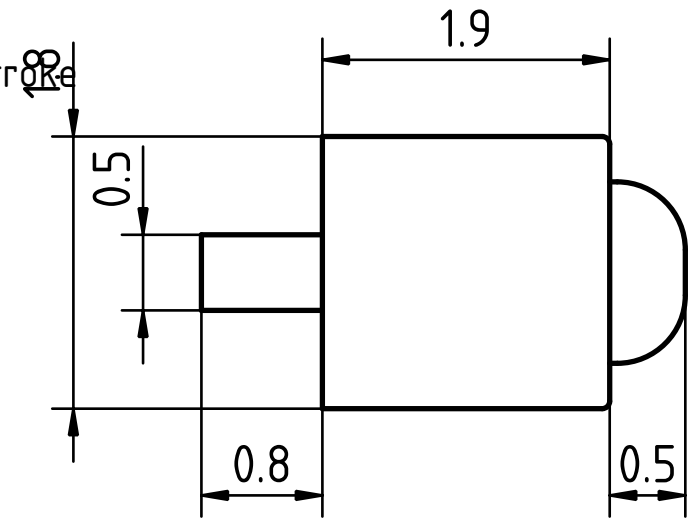


Electrical:

Rated voltage: 5V
Rated current: 1.5A
Contact resistance: max. 50 mOhm

Other:

ROHS Compliant!

| | | | |
|---|---|---|---|
| DESIGNED BY: Suku Wc<br>DATE: 2023.08.21. | IS_POGO_D18x24_THT<br>All dimensions are in millimeters (mm) | | |
| SIZE A4 | | | |
| SCALE 20:1 | WEIGHT (kg) N/A | DRAWING NUMBER 1/1 | SHEET 1/1 |

This drawing is our property; it can't be reproduced or communicated without our written consent.

| | |
|---|---|
| G | _ |
| F | _ |
| E | _ |
| D | _ |
| C | _ |
| B | _ |
| A | _ |