



Center frequency	10mW
Working voltage	1.8-3.6VDC
Communication level	07VDD-3.6VDC
Actual distance	greater than 380 meters (depending on whether there are obstacles in the environment)
Maximum power	10dpm (approximately 10mw)
Air speed	1.2kbps-500kbps (due to the physical characteristics of 433, it is recommended not to exceed 20kbps)
Emission current	29.2mA (peak)
Receiving current	14.7mA
Working frequency band	387MHz-464MHz (adjustable through software, recommended 433 (plus or minus 10%))
Receiving sensitivity	-117dpm@250kbp

Pin Number	Pin Name	Pin Direction	Pin Usage
1	GND		Connect the ground wire to the power reference ground
2	VCC		The power supply must be between 1.8-3.6V
3	GDD0	Input	Module information output pin
4	CSN	Input	Module chip selection pin, used to start an SPI communication
5	SCK	Input	Module SPI bus clock
6	MOSI	Input	Module SPI data input pin
7	MISO/GD01	Output	Module SPI data input pin
8	GD02	Output	Module information output pin

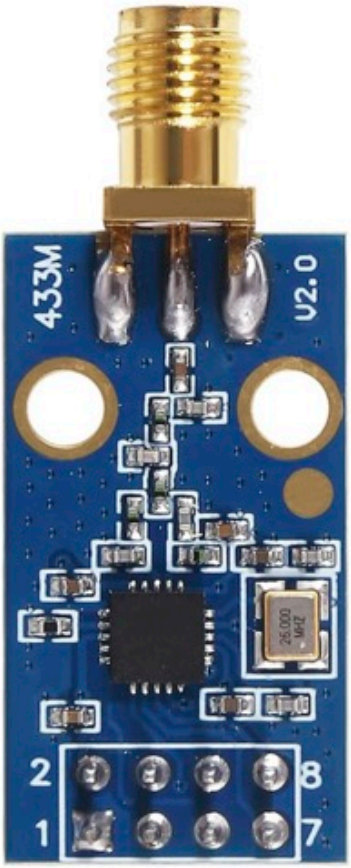



1	GND
2	VCC
3	GD00
4	CSN
5	SCK
6	MOSI
7	MISO/GD01
8	GD02

Product Size

