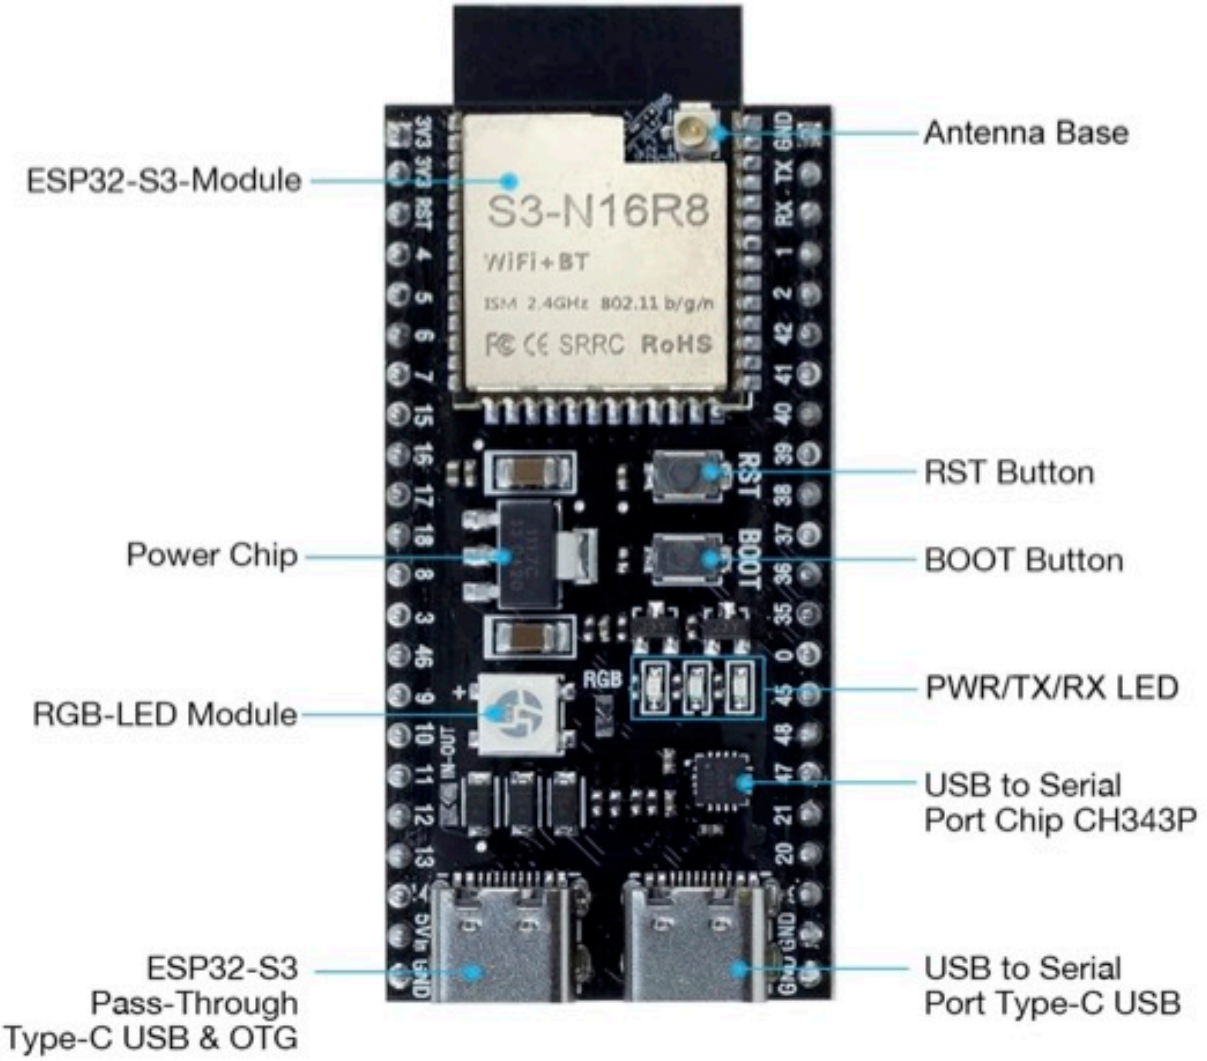
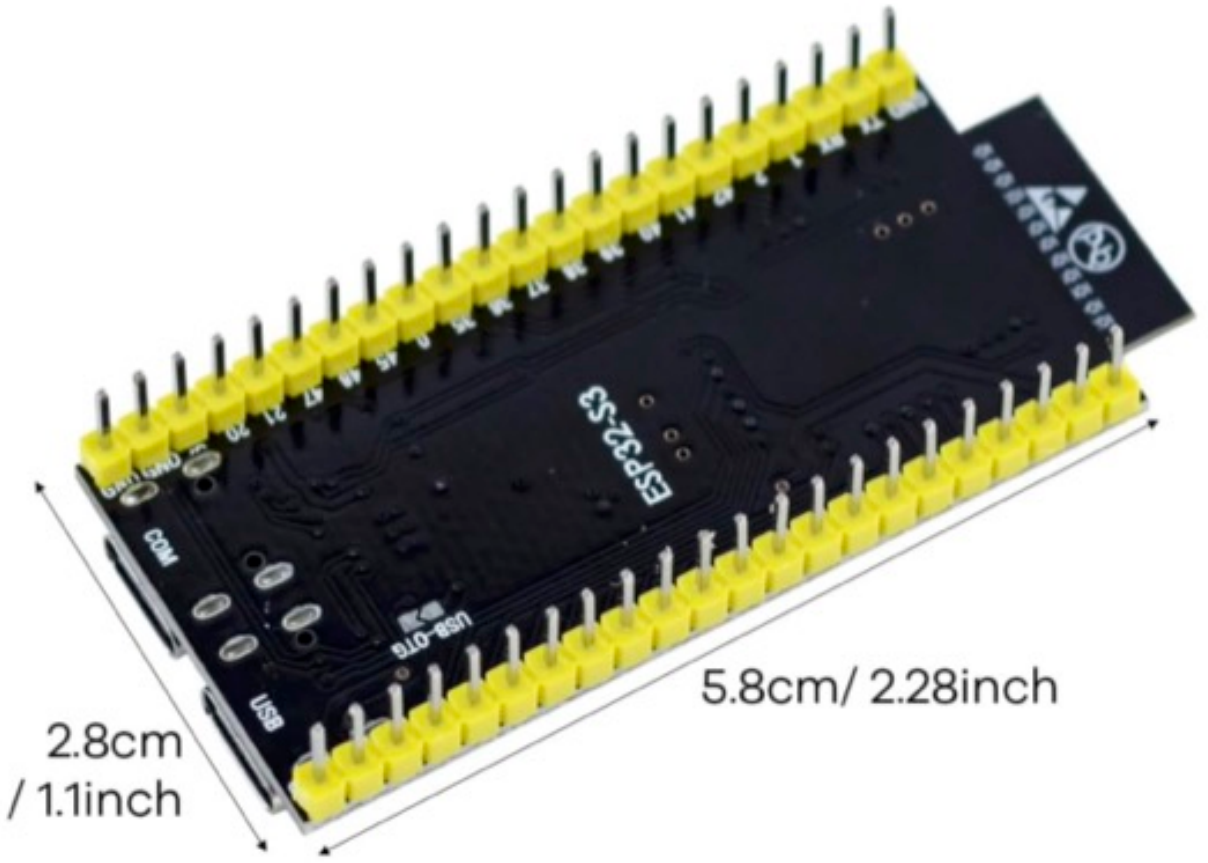
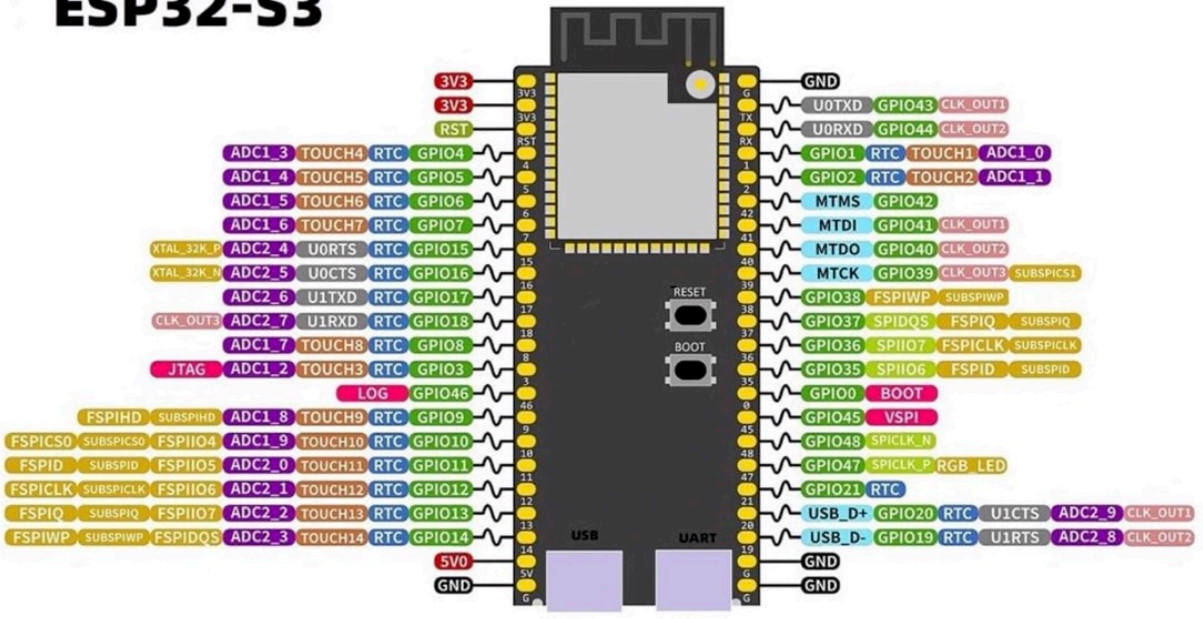

ESP32-S3-Module
Antenna Base
S3-N16R8
WiFi+BT
ISM 2.4GHz 802.11 b/g/n
FC CE SRRC RoHS
RST Button
Power Chip
BOOT Button
RGB-LED Module
PWR/TX/RX LED
USB to Serial
Port Chip CH343P
ESP32-S3
Pass-Through
Type-C USB & OTG
USB to Serial
Port Type-C USB


ESP32-S3
COM
USB
USB-OTG
5.8cm/ 2.28inch
2.8cm
/ 1.1inch

ESP32-S3



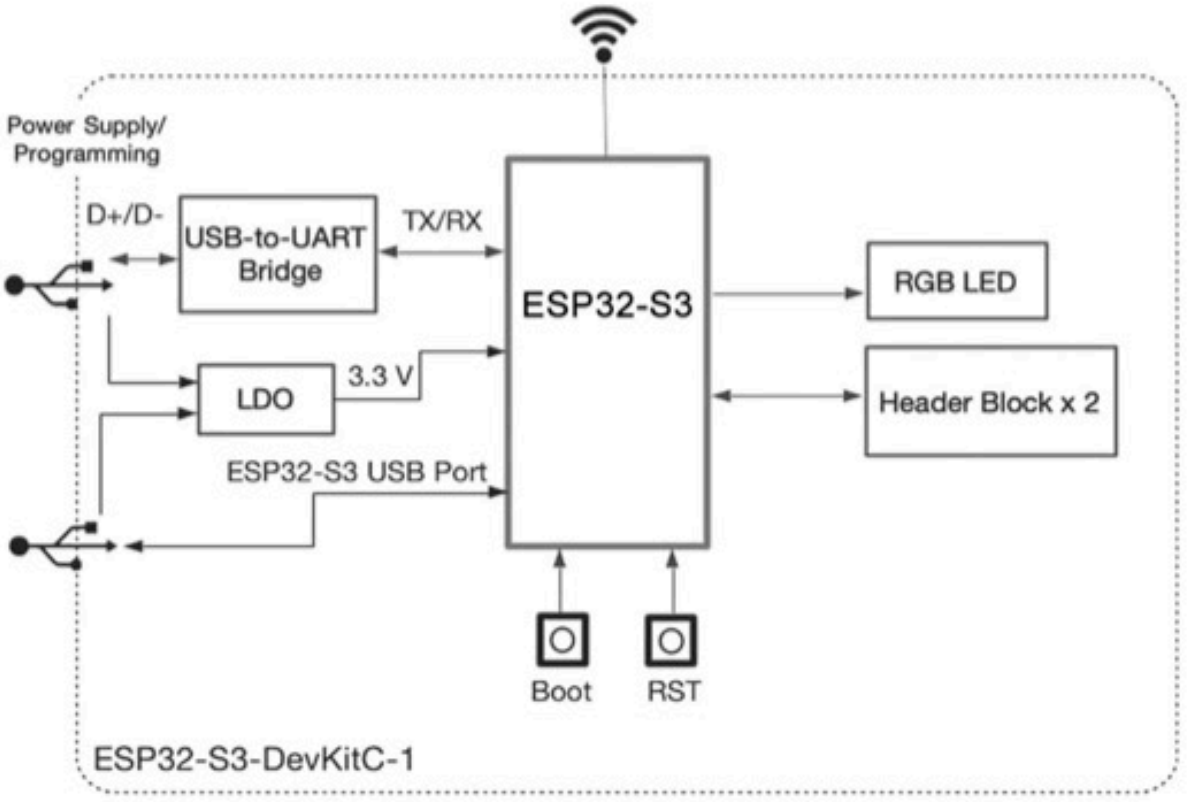
Introduction to ESP32S3

Built in 512KB SRAM.
External 16MB Flash and 8MB PSRAM, suitable for complex tasks and data caching.

GPIO: Up to 45 general-purpose pins.
ADC: 14 12 bit ADC channels.
3 UARTs, supporting serial communication.
SPI/I2C/I2S: Supports common peripheral communication protocols.
PWM: Suitable for motor control or LED dimming.
USB: Supports native USB 2.0, OTG and CDC functions.
RGB controller: Built in LCD and LED controller.

PWM Capable Pin
GPIOX GPIO Input and Output
JTAG/USB JTAG for Debugging and USB
ADCX_CH Analog-to-Digital Converter
TOUCHX Touch Sensor Input Channel
OTHER Other Related Functions
SERIAL Serial for Debug/Programming
STRAP Strapping Pin Functions
RTC RTC Power Domain (VDD3P3_RTC)
GND Ground
PWD 3.3V or 5V

MISC Miscellaneous/SPI functions
CLK_OUTX Clock Output



ESP32-S3 Module

- 16MB Flash and 8 MB PSRAM
- Integrates complete Wi-Fi andBlue - tooth LE functions
- Easy to use and flexible to expand