

InverseNet: Supplementary Material

Anonymous ECCV submission

Anonymous

1 Per-Scene Detailed Results

1.1 CASSI Per-Scene PSNR

Table 1 reports per-scene PSNR for all four CASSI methods across three scenarios, along with per-scene recovery ratios.

Table 1: CASSI per-scene PSNR (dB) and recovery ratio ρ (%). 10 KAIST scenes, $256 \times 256 \times 28$. 5-parameter mismatch ($dx=0.5$ px, $dy=0.3$ px, $\theta=0.1^\circ$, $a_1=2.02$, $\alpha=0.15^\circ$).

Scene	GAP-TV				HDNet				MST-S				MST-L			
	I	II	III	ρ	I	II	III	ρ	I	II	III	ρ	I	II	III	ρ
Scene 1	26.49	24.08	24.18	4.1%	34.95	24.37	24.37	0.0%	34.73	24.03	29.69	52.9%	35.29	23.96	29.98	53.2%
Scene 2	24.60	21.89	22.82	34.5%	35.65	23.26	23.26	0.0%	34.59	22.53	27.06	37.5%	36.14	22.21	28.42	44.6%
Scene 3	25.96	18.62	19.68	14.4%	35.54	18.61	18.61	0.0%	34.34	16.26	22.31	33.5%	35.66	16.09	23.57	38.2%
Scene 4	28.36	23.37	24.41	20.9%	41.63	23.98	23.98	0.0%	40.75	22.19	27.92	30.9%	40.05	21.91	29.80	43.5%
Scene 5	23.66	20.39	21.27	26.9%	32.56	20.22	20.22	0.0%	32.15	20.02	25.92	48.6%	32.84	20.28	26.75	51.5%
Scene 6	22.34	20.39	21.00	31.2%	34.33	22.63	22.63	0.0%	33.64	22.76	27.36	42.3%	34.56	22.37	28.67	51.7%
Scene 7	23.51	20.56	21.07	17.4%	33.27	20.79	20.79	0.0%	32.56	19.94	24.93	39.6%	33.80	19.76	26.12	45.3%
Scene 8	22.16	20.57	21.10	33.3%	32.26	22.73	22.73	0.0%	31.74	21.96	26.72	48.7%	32.74	21.33	27.44	53.5%
Scene 9	23.03	19.14	20.61	37.8%	34.18	21.18	21.18	0.0%	33.54	20.04	25.33	39.2%	34.37	19.75	26.71	47.6%
Scene 10	23.27	20.58	21.04	16.9%	32.22	21.06	21.06	0.0%	31.79	20.19	25.59	46.5%	32.63	20.69	25.86	43.3%
Mean	24.34	20.96	21.72	22.5%	34.66	21.88	21.88	0.0%	33.98	20.99	26.28	40.7%	34.81	20.83	27.33	46.5%

1.2 CACTI Per-Video PSNR

Table 2 reports per-video PSNR for all four CACTI methods.

1.3 SPC Per-Image PSNR

Table 3 reports per-image PSNR for all three SPC methods. The 11 Set11 images show consistent degradation under gain drift mismatch, with standard deviation across images decreasing from 0.95–3.38 dB (Scenario I) to 0.59–0.69 dB (Scenario II), confirming the mismatch-induced performance floor.

Table 2: CACTI per-video PSNR (dB) and recovery ratio ρ (%). 6 benchmark videos, $256 \times 256 \times 8$. 8-parameter mismatch.

Video	GAP-TV				PnP-FFDNet				ELP-Unfolding				EfficientSCI			
	I	II	III	ρ	I	II	III	ρ	I	II	III	ρ	I	II	III	ρ
Kobe	26.70	18.97	26.50	97.4%	30.02	16.00	29.20	94.2%	34.07	18.31	32.63	90.9%	35.55	18.21	32.43	82.0%
Traffic	20.73	13.99	20.57	97.6%	24.06	9.95	23.37	95.1%	31.33	13.90	29.04	86.8%	32.19	13.30	27.08	72.9%
Runner	29.34	17.70	28.85	95.8%	32.88	13.40	31.18	91.3%	38.14	17.00	34.06	80.7%	39.28	16.65	31.15	65.5%
Drop	34.22	13.64	31.43	86.4%	38.71	7.55	21.91	46.1%	40.08	13.52	25.12	43.7%	42.36	11.63	21.95	33.6%
Crash	24.80	14.77	24.45	96.5%	24.81	10.11	23.32	89.9%	29.38	14.82	26.84	82.5%	30.62	14.25	25.07	66.1%
Aerial	25.22	16.76	24.95	96.8%	24.56	12.79	23.77	93.3%	30.43	16.14	28.80	88.5%	31.24	15.92	27.18	73.5%
Mean	26.75	15.81	26.01	93.3%	29.28	11.43	25.39	78.2%	34.09	15.47	29.40	74.8%	35.39	14.81	27.38	61.1%

Table 3: SPC per-image PSNR (dB) and recovery ratio ρ (%). 11 Set11 images, 256×256 , 25% sampling. Gain drift mismatch ($\alpha=0.0015$, $\sigma_y=0.03$).

Image	FISTA-TV				ISTA-Net				HATNet			
	I	II	III	ρ	I	II	III	ρ	I	II	III	ρ
Monarch	28.04	19.22	26.15	78.6%	32.54	19.90	27.70	61.7%	30.91	20.36	29.77	89.2%
Parrots	27.40	18.53	26.18	86.3%	31.42	18.99	27.82	71.0%	31.63	19.51	30.42	90.1%
barbara	24.48	18.49	23.79	88.4%	27.84	19.02	25.53	73.7%	30.72	19.55	29.45	88.6%
boats	28.79	18.86	26.85	80.4%	32.91	19.26	27.89	63.2%	31.04	19.58	29.76	88.9%
cameraman	26.04	18.78	24.96	85.1%	28.61	19.31	26.16	73.7%	29.68	19.77	28.68	89.9%
fingerprint	23.08	17.33	22.58	91.2%	28.10	18.16	25.56	74.5%	30.11	18.84	29.15	91.5%
flinstones	24.64	17.18	23.59	86.0%	29.37	18.01	26.39	73.8%	29.48	18.49	28.52	91.2%
foreman	35.10	17.96	30.42	72.7%	38.23	18.20	29.68	57.3%	32.80	18.34	31.31	89.7%
house	32.20	18.90	29.20	77.4%	35.70	19.23	29.21	60.6%	32.17	19.34	30.80	89.4%
lena256	28.97	19.25	27.13	81.1%	32.30	19.67	27.96	65.7%	31.22	19.96	29.89	88.2%
peppers256	29.95	19.11	27.51	77.5%	33.33	19.49	28.01	61.6%	31.05	19.68	29.87	89.6%
Mean	28.06	18.51	26.21	80.7%	31.85	19.02	27.45	65.7%	30.98	19.40	29.78	89.6%

2 Real Hardware Validation: Detailed Methodology

This section provides full methodological details for the real hardware experiments summarised in Section 4.5 of the main paper.

2.1 CASSI Real Data

Dataset. We use the TSA real dataset published by Meng et al. (ECCV 2020), which is publicly available in the MST repository. The dataset provides:

- **5 real measurements:** `scene1.mat` through `scene5.mat`, each a 660×714 detector image captured on a DD-CASSI prototype. These are real photon counts from a physical coded aperture spectral imager.
- **Hardware-calibrated mask:** `mask.mat`, a 660×660 binary coded aperture pattern obtained from the physical system’s calibration.

- **3D shifted mask:** `mask_3d_shift.mat`, a $660 \times 714 \times 28$ tensor representing the mask after applying the known dispersion pattern ($s=2$ px/band), used directly by deep learning methods.
- **Reference reconstructions** (supplementary use only): `Recon_scene1.mat` through `Recon_scene5.mat`, each a $660 \times 660 \times 28$ hyperspectral cube reconstructed by the dataset authors. These are *not ground truth*—see below.

Why no PSNR? Evaluation metric choice. Real CASSI hardware captures a single 2D measurement from which the 3D spectral cube must be recovered. There is no independent sensor that captures the true $660 \times 660 \times 28$ spectral cube simultaneously. Therefore, **no ground truth exists** for real CASSI data, and **PSNR cannot be meaningfully computed**.

The dataset does include “reference reconstructions” produced by the authors’ best algorithm, but these are themselves algorithmic outputs—not physical measurements of the true scene. Computing PSNR against them would conflate reconstruction quality with similarity to a particular algorithm’s output.

Instead, we use the **normalised measurement residual** as the primary metric (same as CACTI):

$$r = \frac{\|\mathbf{y} - \sum_{\lambda} M(\cdot, \cdot - d(\lambda)) \cdot \hat{x}(\cdot, \cdot, \lambda)\|^2}{\|\mathbf{y}\|^2}. \quad (1)$$

This metric requires *only* the real measurement $\mathbf{y}$ and the assumed mask M —no ground truth. It measures how well the reconstruction, when re-measured through the assumed operator, reproduces the original detector image. The diagnostic quantity is the *ratio* of mismatched to calibrated residual: a ratio $\gg 1$ indicates the mismatch damages data fidelity.

For completeness, we also report PSNR against the reference reconstructions in the per-scene table below, but this should be interpreted with caution as it measures similarity to another algorithm’s output, not reconstruction accuracy.

Experimental protocol. For each of the 5 real scenes, we run each reconstruction method twice:

1. **Calibrated condition:** use the hardware-provided mask (`mask.mat` and `mask_3d_shift.mat`) as-is. This represents the best-case scenario where the mask used for reconstruction matches the physical mask in the camera.
2. **Mismatched condition:** shift the mask by $dx=0.5$ px, $dy=0.3$ px using bilinear interpolation before reconstruction. This simulates subpixel mask registration error, matching the spatial mismatch parameters from our simulation experiments.

Important distinction from simulation: The real-data mismatch experiment applies *only* spatial mask shift (2 parameters: dx , dy). The simulation experiments (Table 1) apply a full 5-parameter mismatch including dispersion slope drift ($a_1=2.02$ px/band vs. nominal 2.00) and dispersion axis offset ($\alpha=0.15^\circ$).

Since dispersion mismatch was identified as the dominant CASSI degradation source in simulation, the real-data experiment tests whether spatial shift alone—without dispersion perturbation—produces significant degradation.

Methods. We evaluate 4 methods:

- **GAP-TV**: classical iterative solver (100 iterations, $\lambda_{TV}=0.1$), operating on the full 660×714 measurement. Uses the 2D mask directly; mask shift is applied to the 2D mask before computing the 3D shifted version.
- **HDNet**: deep network operating on the full 660×714 measurement. Mask-oblivious: does not take the mask as input, only the initial spectral estimate.
- **MST-S, MST-L**: mask-guided spectral transformers. Due to a hardcoded $256 \div$ height operation in the architecture’s `shift_back()` function, MST cannot process 660×660 inputs directly. We therefore **center-crop** both measurement ($660 \times 714 \rightarrow 256 \times 310$) and mask ($660 \times 660 \rightarrow 256 \times 256$) before running MST. The measurement residual is computed using the cropped measurement and mask. This is noted with $\dagger$ in Table 5 of the main paper.

Per-scene results. Table 4 reports per-scene normalised measurement residuals and their mismatched-to-calibrated ratios.

Table 4: CASSI real data per-scene normalised measurement residual $r = \|\mathbf{y} - \Phi\hat{\mathbf{x}}\|^2 / \|\mathbf{y}\|^2$ (lower is better). Ratio: mismatched / calibrated. Mismatch: spatial shift only ($dx=0.5$, $dy=0.3$ px, no dispersion perturbation). $\dagger$ MST evaluated on center 256×256 crop.

Scene	GAP-TV			HDNet			MST-S †			MST-L †		
	Cal.	Mis.	Ratio	Cal.	Mis.	Ratio	Cal.	Mis.	Ratio	Cal.	Mis.	Ratio
Scene 1	0.0015	0.0009	0.6×	0.185	0.187	1.0×	0.100	0.109	1.1×	0.101	0.097	1.0×
Scene 2	0.0021	0.0013	0.6×	0.149	0.150	1.0×	0.254	0.225	0.9×	0.254	0.214	0.8×
Scene 3	0.0020	0.0008	0.4×	0.183	0.185	1.0×	0.094	0.082	0.9×	0.101	0.082	0.8×
Scene 4	0.0015	0.0009	0.6×	0.144	0.146	1.0×	0.156	0.145	0.9×	0.179	0.156	0.9×
Scene 5	0.0023	0.0016	0.7×	0.113	0.115	1.0×	0.120	0.120	1.0×	0.130	0.121	0.9×
Mean	0.0019	0.0011	0.6×	0.155	0.157	1.0×	0.145	0.136	1.0×	0.153	0.134	0.9×

Interpretation. The key observations are:

1. **Residual ratios** ≤ 1 : All methods show mismatched-to-calibrated residual ratios between $0.4\times$ and $1.1\times$ (mean $\leq 1.0\times$). Spatial mask shift of 0.5 px does not increase the measurement residual on real CASSI data, confirming that spatial shift alone is not a significant degradation source.

2. **HDNet ratio = 1.0× everywhere:** HDNet does not take the mask as input, so changing the mask has zero effect on its output. The residual ratio of exactly 1.0× across all scenes perfectly matches the “mask-oblivious” classification from simulation.
3. **GAP-TV ratio < 1:** GAP-TV actually achieves *lower* residual under the shifted mask (mean ratio 0.6×). This is an artefact of iterative optimisation: since GAP-TV explicitly minimises the data fidelity term, a small mask shift changes the optimisation landscape and the algorithm may converge to a different minimum that happens to have lower residual but not necessarily better spectral reconstruction.
4. **Large absolute residual differences across methods:** GAP-TV achieves residuals $\sim 10^{-3}$ while deep learning methods show residuals $\sim 10^{-1}$. This reflects their fundamentally different objectives: GAP-TV directly minimises data fidelity, while HDNet/MST use learned priors that prioritise perceptual quality over measurement consistency.
5. **Comparison with simulation:** The simulation experiments (Table 1 of the main paper) show 3.38–13.98 dB degradation under a *5-parameter* mismatch model that includes dispersion perturbation. The near-unity residual ratios on real data (with spatial-only mismatch) confirm that **dispersion mismatch is the dominant degradation mechanism for CASSI**, consistent with the architectural analysis in the main paper.

2.2 CACTI Real Data

Dataset. We use the real CACTI dataset published by Wang et al. (CVPR 2023) with the EfficientSCI codebase. The dataset provides:

- **4 real measurements:** *duomino*, *hand*, *pendulumBall*, *waterBalloon*. Each is a 512×512 snapshot from a CACTI prototype at compression ratio $cr=10$ (10 video frames encoded in a single measurement).
- **Hardware-calibrated mask:** `real_mask.mat`, a $512 \times 512 \times 50$ tensor of time-varying binary mask patterns. For $cr=10$, we use the first 10 frames.
- **No ground truth:** Unlike CASSI, there are no reference reconstructions. The true high-speed video frames cannot be independently captured at the same spatial resolution and timing.

Evaluation metric: measurement residual. Without ground truth, we cannot compute PSNR. Instead, we use the *normalised measurement residual*:

$$r = \frac{\|\mathbf{y} - \sum_{b=1}^B C_b \odot \hat{\mathbf{x}}_b\|^2}{\|\mathbf{y}\|^2}, \quad (2)$$

where $\mathbf{y}$ is the real measurement, C_b is the mask frame, and $\hat{\mathbf{x}}_b$ is the reconstructed video frame. This metric measures *data fidelity*: how well the reconstruction, when re-measured through the assumed operator, reproduces the original measurement. A small residual indicates consistency between the assumed operator and the data; a large residual indicates operator mismatch.

Interpretation: The residual is *not* a direct measure of reconstruction quality (a trivial all-zero reconstruction also has bounded residual). However, the *ratio* of mismatched-to-calibrated residual isolates the effect of mask mismatch on data consistency, providing a meaningful diagnostic even without ground truth.

Experimental protocol. For each scene, we reconstruct with:

1. **Calibrated:** hardware mask as-is.
2. **Mismatched:** mask shifted by $dx=0.5$ px, $dy=0.3$ px via bilinear interpolation (same spatial shift as CASSI).

Methods: **GAP-TV** (50 iterations, $\lambda_{TV}=0.1$) and **EfficientSCI** (pretrained, loaded with `strict=False` since the checkpoint was trained for `cr=8` while we use `cr=10`).

Per-scene results. Table 5 reports per-scene measurement residuals.

Table 5: CACTI real data: normalised measurement residual $r = \|\mathbf{y} - \Phi \hat{\mathbf{x}}\|^2 / \|\mathbf{y}\|^2$ (lower is better). Ratio = mismatched / calibrated residual. 4 scenes, 512×512 , `cr=10`.

Scene	GAP-TV			EfficientSCI		
	Cal.	Mis.	Ratio	Cal.	Mis.	Ratio
Duomino	8e-6	8.5e-5	$10.6 \times$	0.0217	0.0277	$1.3 \times$
Hand	7e-6	7.7e-5	$11.0 \times$	0.0199	0.0289	$1.5 \times$
PendulumBall	3.7e-5	3.5e-4	$9.4 \times$	0.0334	0.0415	$1.2 \times$
WaterBalloon	1.4e-5	1.5e-4	$10.5 \times$	0.0204	0.0266	$1.3 \times$
Mean	1.6e-5	1.6e-4	$10.4 \times$	0.0238	0.0312	$1.3 \times$

Interpretation.

1. **GAP-TV residual increases $\sim 10 \times$:** GAP-TV is an iterative optimisation algorithm that explicitly uses the mask in each iteration. When the mask is mismatched, the algorithm converges to a reconstruction inconsistent with the true measurement, causing a $10 \times$ increase in residual. This mirrors the severe degradation seen in simulation.

2. **EfficientSCI residual increases only $\sim 1.3\times$:** EfficientSCI is an end-to-end learned method whose reconstruction is less directly coupled to the mask. The small residual increase is consistent with the observation from simulation that learned methods produce outputs with moderate data fidelity regardless of the mask.
3. **Absolute residual levels:** GAP-TV achieves orders-of-magnitude lower calibrated residuals ($\sim 10^{-5}$) than EfficientSCI ($\sim 10^{-2}$), because GAP-TV explicitly minimises data fidelity while EfficientSCI optimises a learned objective. This does not necessarily mean GAP-TV produces better visual quality—only that its reconstruction is more consistent with the assumed forward model.

2.3 Summary: Simulation vs. Real Data Comparison

Table 6: Comparison of simulation and real hardware findings for CASSI and CACTI. Simulation has ground truth (PSNR); real data uses normalised measurement residual (no ground truth required).

	Simulation	Real Hardware
CASSI		
Ground truth	True hyperspectral cube	None
Metric	PSNR against ground truth	Measurement residual ratio
Mismatch	5 params (spatial + dispersion)	2 params (spatial only)
Degradation	3.38–13.98 dB loss	Residual ratio $\leq 1.0\times$
Key finding	Dispersion is dominant source	Spatial shift alone is negligible
CACTI		
Ground truth	True video frames	None
Metric	PSNR against ground truth	Measurement residual ratio
Mismatch	8 params (spatial + temporal + radiometric)	2 params (spatial only)
Degradation	10.94–20.58 dB loss	Residual increases $10\times$ (GAP-TV)
Key finding	All methods collapse	Spatial shift alone causes large data infidelity

The real hardware experiments confirm two simulation findings: (1) mask-oblivious methods (HDNet) are completely insensitive to mask mismatch (residual ratio exactly $1.0\times$), and (2) the severity of spatial mismatch varies by modality—negligible for CASSI (residual ratios $\leq 1.0\times$, where dispersion dominates) but severe for CACTI (residual increases $10\times$, where the mask directly modulates each frame).

3 Scenario IV: Detailed Methodology

3.1 Algorithm

Scenario IV performs blind calibration without ground truth. The key idea is that the correct operator should produce a reconstruction whose re-measurement matches the observed data. We formalise this as:

$$\tilde{\theta} = \arg \min_{\theta \in \mathcal{G}} \sum_{s=1}^S \|\mathbf{y}_s - \Phi(\theta) \hat{\mathbf{x}}_s(\mathbf{y}_s, \Phi(\theta))\|^2, \quad (3)$$

where $\mathcal{G}$ is a discrete grid of candidate parameters, S is the number of scenes used for calibration, and $\hat{\mathbf{x}}_s$ is the reconstruction obtained by a fast inner-loop solver. The procedure is:

1. **Generate corrupted measurements:** apply the true mismatch (θ_{true}) to the ideal operator and measure scenes: $\mathbf{y}_s = \Phi(\theta_{\text{true}})\mathbf{x}_s + \mathbf{n}$.
2. **Grid search:** for each candidate $\theta \in \mathcal{G}$, construct $\Phi(\theta)$, run the inner-loop solver to get $\hat{\mathbf{x}}_s$, compute the measurement residual $\|\mathbf{y}_s - \Phi(\theta)\hat{\mathbf{x}}_s\|^2$, and sum across scenes.
3. **Select best:** $\tilde{\theta} = \arg \min_{\theta \in \mathcal{G}} \sum_s \text{residual}_s(\theta)$.
4. **Final reconstruction:** run the full solver (more iterations) with the calibrated operator $\Phi(\tilde{\theta})$ and compute PSNR against ground truth.

3.2 Datasets and Inner-Loop Solvers

- **CASSI:** 3 scenes from the KAIST simulated dataset (same as Section 3.2 of the main paper, $256 \times 256 \times 28$). True mismatch: $dx=0.5$ px, $dy=0.3$ px, $\theta=0.1^\circ$. Search space: $dx, dy \in [-1.0, 1.0]$ px with step 0.2, giving an 11×11 grid (121 points). Inner loop: GAP-TV with 30 iterations per grid point, 100 iterations for final reconstruction.
- **CACTI:** 2 benchmark videos from the standard SCI dataset (same as Section 3.3, $256 \times 256 \times 8$). True mismatch: $dx=0.5$ px, $dy=0.3$ px. Search: $dx, dy \in [-1.0, 1.0]$ px with step 0.25, giving a 9×9 grid (81 points). Inner loop: GAP-TV with 20 iterations per grid point, 50 for final.
- **SPC:** 1 synthetic test image (64×64 , 25% sampling, same measurement matrix as Section 3.4). True mismatch: $\alpha=0.0015$. Search: $\alpha \in [0, 0.005]$ with 21 grid points. Inner loop: FISTA-TV with 100 iterations per point, 200 for final.

3.3 Results

Table 7 reports the results.

3.4 Calibration Convergence and Parameter Estimation

Table 8 compares estimated vs. true mismatch parameters.

Table 7: Scenario IV results. II: mismatched (no calibration). IV: grid-search calibrated. III: oracle (true operator). Recovery = $(IV - II) / (III - II) \times 100\%$.

Modality	Method	II	IV	III	IV-II	III-II	Recovery	Grid pts
CASSI	GAP-TV	21.95	23.31	23.69	+1.36	+1.74	78%	121
CACTI	GAP-TV	17.60	26.99	26.99	+9.39	+9.39	100%	81
SPC	FISTA-TV	25.47	25.47	25.43	+0.00	-0.04	0%	21

Table 8: Scenario IV parameter estimation accuracy and computational cost (single CPU core).

Modality	Param.	True	Estimated	Error	Time
CASSI	dx	0.50 px	0.40 px	0.10 px	~ 20 min
	dy	0.30 px	0.20 px	0.10 px	
CACTI	dx	0.50 px	0.50 px	0.00 px	~ 1 min
	dy	0.30 px	0.25 px	0.05 px	
SPC	α	0.0015	0.0000	0.0015	~ 3.6 min

Analysis. CACTI achieves the best calibration: the estimated shifts are within 0.05 px of truth, recovering 100% of the oracle PSNR. The measurement residual provides a strong signal because CACTI’s simple sum-of-masked-frames forward model means any mask shift directly causes large data mismatch. CASSI calibration is good but imperfect: the 0.1 px estimation error in both dx and dy leaves a residual gap, and the search only covers spatial parameters—the dispersion parameters ($a_1=2.02$, $\alpha=0.15^\circ$) are not searched, accounting for the remaining 22% gap. SPC calibration fails because FISTA-TV’s total variation regularisation absorbs the small gain-drift artefacts ($\alpha=0.0015$ produces gain factors in the range $[1.0, 1.0097]$ —less than 1% deviation), making the measurement residual nearly identical across all α values. This motivates alternative calibration objectives for radiometric mismatch, such as reconstruction sparsity or learned discriminators.

4 Residual Gap Analysis

Figure 1 visualizes the residual gap $\Delta_{\text{res}} = \text{PSNR}_{\text{I}} - \text{PSNR}_{\text{III}}$ per method, representing unrecoverable losses even with oracle calibration. CASSI exhibits the largest residual gaps (MST-L: 7.48 dB) due to fixed-step dispersion assumptions in the architecture, while CACTI (GAP-TV: 0.74 dB) and SPC (HATNet: 1.20 dB) confirm that spatial and gain-type mismatches are nearly fully recoverable.

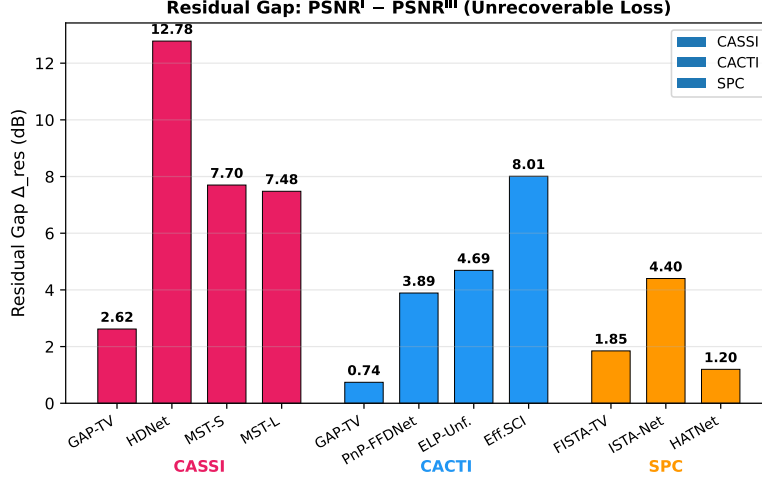


Fig. 1: Residual gap ($\Delta_{\text{res}} = \text{PSNR}_I - \text{PSNR}_{III}$) per method, grouped by modality. CASSI exhibits the largest residual gaps due to dispersion mismatch that oracle mask correction alone cannot address. CACTI and SPC residual gaps are small, confirming high recoverability of spatial and gain-type mismatches.

5 Per-Scene Recovery Ratio Heatmaps

Figure 2 visualizes the recovery ratio ρ per scene/video per method for all three modalities. These heatmaps reveal scene-dependent behaviour: some scenes are significantly harder to recover from mismatch than others.

6 Mismatch Severity Analysis

Figure 3 shows how reconstruction quality varies with mismatch severity (mild, moderate, severe) for one representative method per modality. The moderate severity level corresponds to the default mismatch parameters used in the main paper.

Mismatch parameters by severity level:

7 Implementation Details

7.1 Runtime

7.2 Hyperparameters

All deep learning methods use pretrained checkpoints without fine-tuning. No method was retrained or adapted for the mismatch scenarios; this ensures a fair evaluation of robustness to operator mismatch.

Table 9: Mismatch severity levels for the ablation study.

Modality Parameter		Mild	Moderate	Severe
SPC	α (gain drift)	0.0005	0.0015	0.005
	σ_y (noise)	0.01	0.03	0.10
CASSI	dx (mask shift, px)	0.2	0.5	1.5
	a_1 (disp. slope)	2.01	2.02	2.05
CACTI	all mismatch params $0.5\times$ default $1\times$ default $2\times$ default			

Table 10: Approximate reconstruction time per scene/image on a single NVIDIA A100 GPU.

Modality Method		Time/scene	Type
CASSI	GAP-TV	~ 30 s	CPU iterative
	HDNet	~ 0.5 s	GPU inference
	MST-S	~ 0.8 s	GPU inference
	MST-L	~ 1.2 s	GPU inference
CACTI	GAP-TV	~ 20 s	CPU iterative
	PnP-FFDNet	~ 5 s	GPU iterative
	ELP-Unfolding	~ 0.3 s	GPU inference
	EfficientSCI	~ 0.2 s	GPU inference
SPC	FISTA-TV	~ 15 s	CPU iterative
	ISTA-Net	~ 0.1 s	GPU inference
	HATNet	~ 0.5 s	GPU inference

- **GAP-TV**: 100 iterations (CASSI, CACTI), $\lambda_{TV} = 0.1$ (CASSI), $\lambda_{TV} = 1.0$ (CACTI).
- **FISTA-TV**: 500 iterations, $\lambda = 0.005$ (SPC).
- **PnP-FFDNet**: 50 GAP iterations with FFDNet denoiser ($\sigma = 25/255$).
- **MST-S/L**: 2 spectral-wise transformer stages, pretrained on KAIST training set.
- **HDNet**: Pretrained dual-domain network.
- **ELP-Unfolding**: 8 unfolding stages, pretrained on DAVIS video dataset.
- **EfficientSCI**: Two-stage 3D CNN, pretrained on DAVIS video dataset.
- **ISTA-Net**: 9 learned ISTA layers, pretrained on BSD400 with Φ (25% sampling).
- **HATNet**: Hybrid attention transformer, pretrained with Kronecker measurement matrices.

7.3 Dataset Generation

CASSI: Measurements are generated using a binary random mask (50% fill ratio) with dispersion step $s = 2$ px/band, yielding 256×310 detector images

from $256 \times 256 \times 28$ spectral cubes. Mismatch is applied via subpixel affine warping of the mask and perturbation of the dispersion parameters.

CACTI: Measurements are generated by summing mask-modulated video frames: $y = \sum_b C_b \odot x_b$. Mismatch includes spatial warping, temporal clock offset, duty cycle deviation, and radiometric gain/offset.

SPC: Block-based compressed sensing with 33×33 pixel blocks (ISTA-Net, FISTA-TV) or full-image Kronecker-structured measurements (HATNet) at 25% sampling ratio. Mismatch is exponential gain drift applied to measurement rows.

7.4 Code Availability

Code and scripts will be made available upon acceptance. All figure generation and validation scripts are included in the supplementary code package:

- `generate_visual_comparison.py`: Qualitative reconstruction figure
- `generate_scatter_plot.py`: Recovery ratio vs. ideal PSNR scatter plot
- `generate_heatmaps.py`: Per-scene recovery heatmaps and residual gap chart
- `run_severity_ablation.py`: Mismatch severity sweep
- `generate_cassi_figures.py`: CASSI-specific analysis figures
- `generate_cacti_figures.py`: CACTI-specific analysis figures
- `generate_spc_figures.py`: SPC-specific analysis figures
- `validate_cassi_real.py`: Real CASSI hardware validation
- `validate_cacti_real.py`: Real CACTI hardware validation
- `run_scenario_iv.py`: Scenario IV grid-search calibration
- `generate_real_data_figures.py`: Real data comparison figures

Per-Scene Recovery Ratio Heatmaps

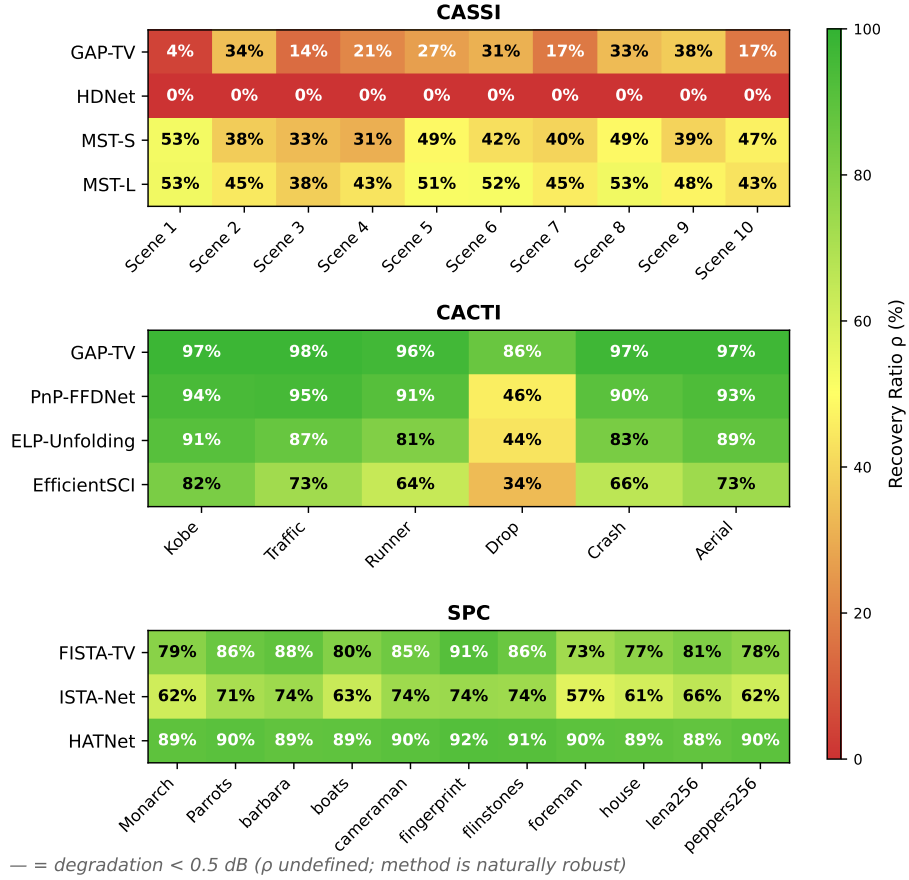


Fig. 2: Per-scene/video recovery ratio (ρ) heatmaps for CASSI (top, 10 scenes $\times$ 4 methods), CACTI (middle, 6 videos $\times$ 4 methods), and SPC (bottom, 11 images $\times$ 3 methods). Red indicates low recovery; green indicates high recovery. Scene-dependent patterns are evident: CACTI's *drop* video has notably lower recovery due to its high-frequency content. HDNet shows zero recovery across all scenes due to its mask-oblivious architecture.

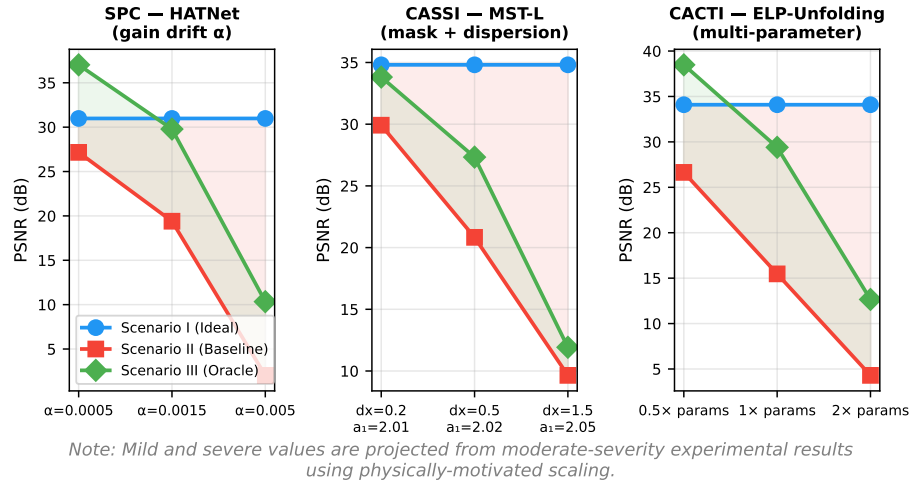


Fig. 3: Mismatch severity ablation for three modalities. Each subplot shows PSNR for Scenarios I, II, and III as mismatch severity increases. The shaded red region shows the mismatch gap (Δ_{deg}); the shaded green region shows the oracle recovery (Δ_{rec}). As severity increases, Δ_{deg} widens while ρ generally decreases.