
## TriColor RED GREEN BLUE LED


This full color super bright LED contains red green and blue LEDS housed in a single 5mm epoxy package They are available with water clear or milky white diffused lenses as part numbers RL5-RGB-C and RL5-RGB-D


**Available with common CATHODE or ANODE** 

## **CLICK HERE TO BUY ONLINE NOW**

We also offer an automatic color changing RGB LED. **CLICK HERE TO SEE SPECS** 

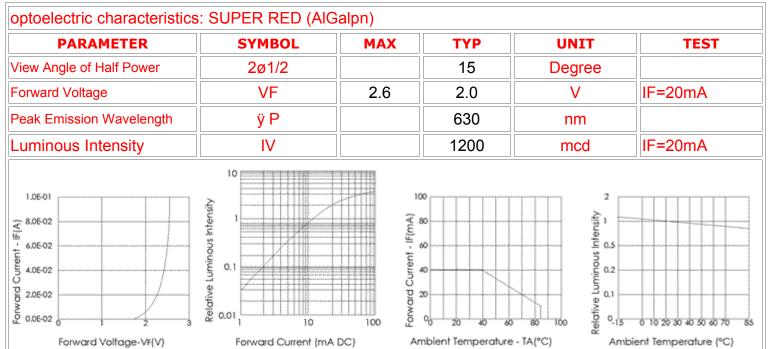


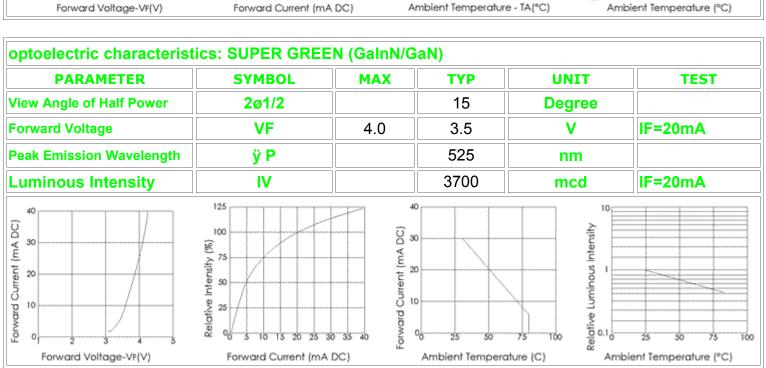

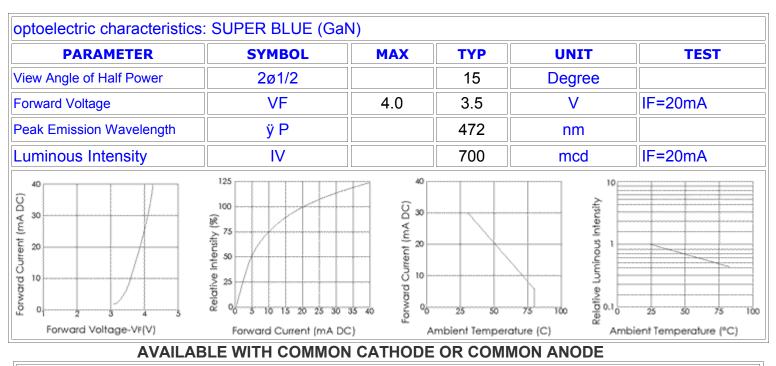

## absolute maximum ratings: (TA=25°C, per individual LED) PART NUMBERS RL5-RGB-C and RL5-

PARAMETER	SYMBOL	RATING	UNI T
Power Dissipation	PD	100	mW
Continuous Forward Current	IF	20	mA
Peak Forward Current (1/10th duty cycle, 0.1ms pulse width)	IFM	50	mA
Reverse Voltage	VR	5.0	V
Operating Temperature	ТА	-40~+85	°C
Storage Temperature	TSTG	-40~+85	°C
Reverse Current (VR=5V)	IR	10	μa
Lead Soldering Temperature (3mm from body) 260C (for 3 seconds)			

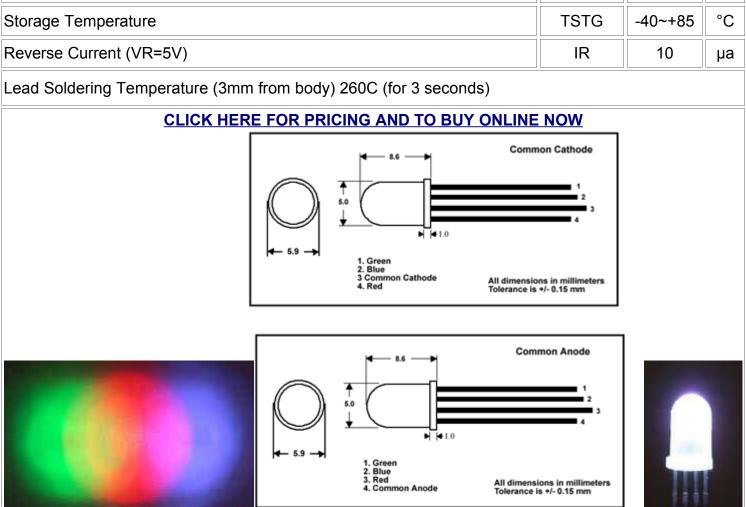

LEADS ARE 0.48mm x 0.48mm square - LEAD SPACING IS 1.25mm - LEAD LENGTH IS 24mm to 28mm