




MCU LOGIC

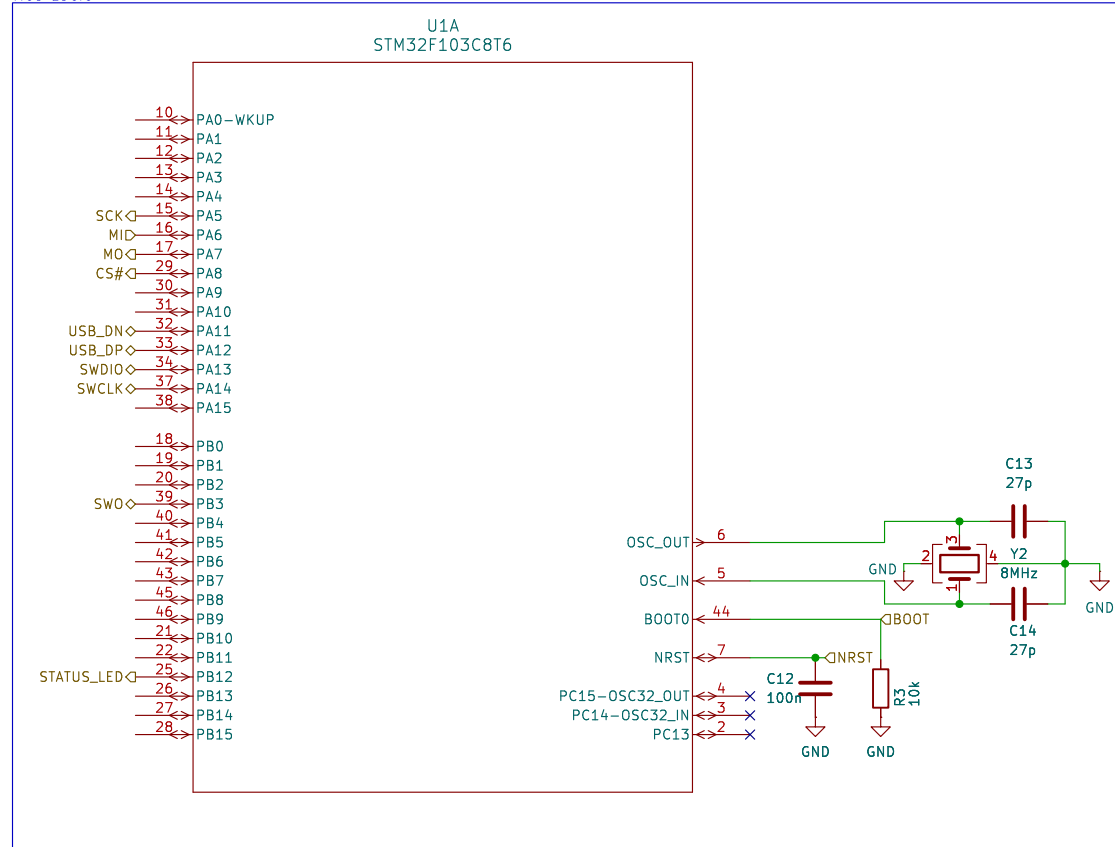


MCU SUPPLY

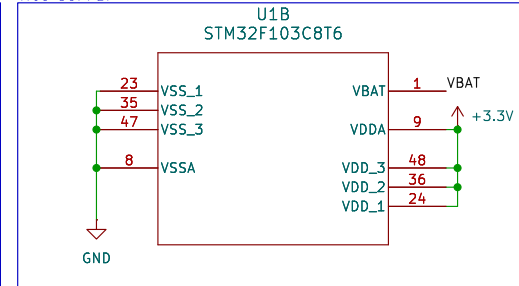


VDD DECOUPLING

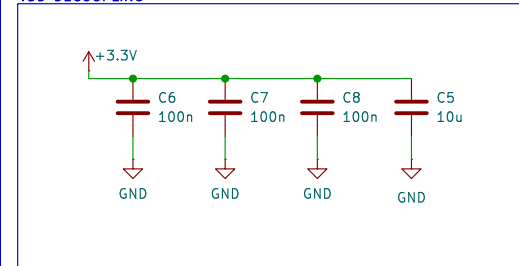

VDDA DECOUPLING



VBAT DECOUPLING



Marek Tatýrek

Sheet: /MCU - STM32F103/

File: untitled.kicad_sch

Title: SPI flash programmer

Size: A4

Date: 2026-04-30

Rev: v1.0

KiCad E.D.A. 9.0.0

Id: 2/5

[illegible]


The diagram shows two identical circuit components. Each component consists of a resistor symbol (a rectangle) connected to a ground symbol (a triangle with three lines). The first component is labeled 'CC1' above the resistor and 'R1 5k1' to its right. The second component is labeled 'CC2' above the resistor and 'R2 5k1' to its right. Both ground symbols are labeled 'GND' below them.

Sheet: /USB-C/
File: usb_c.kicad_sch

Size: A5	Date: 2026-04-30
KiCad E.D.A. 9.0.0	

Rev: v1.0
Id: 3/5

LINEAR REGULATOR LD1117

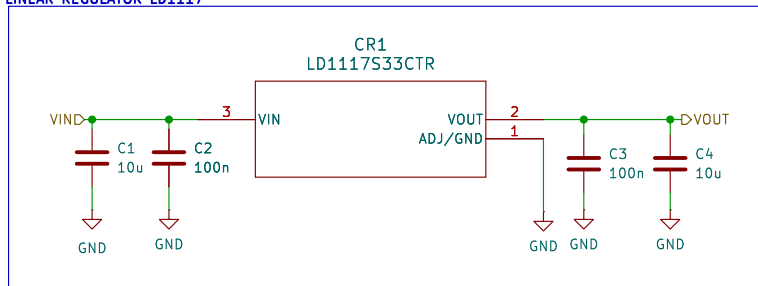

Marek Tatýrek

Sheet: /POWER MANAGEMENT/

File: pwr_man.kicad_sch

Title: SPI flash programmer

Size: A5


Date: 2026-04-30

KiCad E.D.A. 9.0.0


Rev: v1.0

Id: 4/5

SOCKET

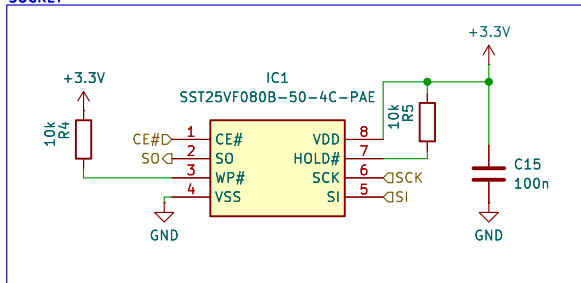

ESD PROTECTION



Marek Tatýrek

Sheet: /SPI FLASH/

File: spi_flash.kicad_sch

Title: SPI flash programmer

Size: A5

Date: 2026-04-30

KiCad E.D.A. 9.0.0

Rev: v1.0

Id: 5/5